

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1500409

Luminaire Tested: LD4C40D010 EU4409040 4LBMH

Issue Date: 2/8/2022

Test Information

Test Method: LM-79-2019
Report Number: P1500409
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4C40D010 EU4409040 4LBMH
Description: 4 INCH 4000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS AND 4LBM TRIM FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3073.9 lumens
Efficiency: N/A
Efficacy: 65.4 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1500409

CATALOG NUMBER: LD4C40D010 EU4409040 4LBMH

Luminous Intensity Polar Plot

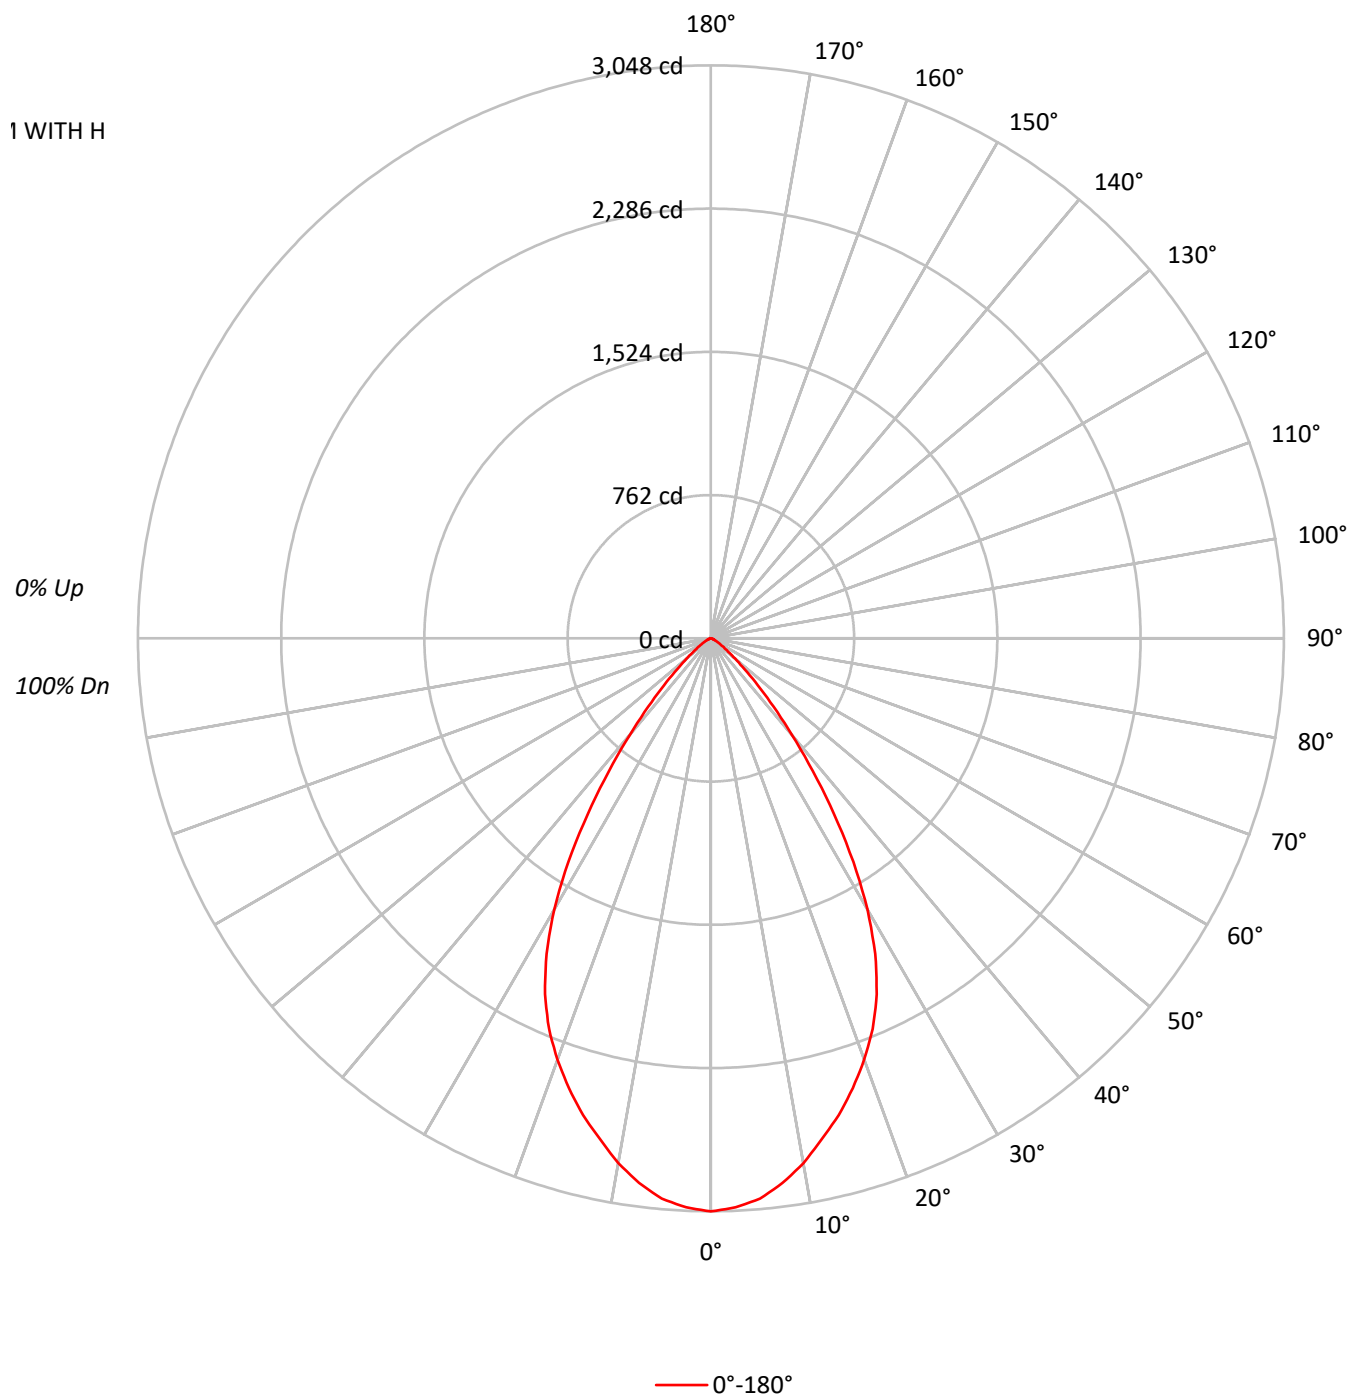

TEST NUMBER: P1500409

CATALOG NUMBER: LD4C40D010 EU4409040 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	82		86
4	96	88	82	77	94	86	81	77	84	80	76		82	78	75		80
5	90	82	75	71	89	81	75	70	79	74	70		77	73	69		75
6	86	76	70	65	84	75	69	65	74	68	64		72	68	64		71
7	81	71	65	60	80	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	56	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	52	49		57	52	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	374470
5°	369031
10°	353613
15°	333981
20°	311758
25°	282996
30°	236280
35°	171168
40°	107146
45°	61244
50°	31937
55°	17885
60°	11401
65°	6744
70°	4993
75°	2183
80°	3254
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 61244 cd/sqm

TEST NUMBER: P1500409

CATALOG NUMBER: LD4C40D010 EU4409040 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	280.5	9.1
10°-20°	735.8	23.9
20°-30°	945.6	30.8
30°-40°	711.4	23.1
40°-50°	285.7	9.3
50°-60°	81.2	2.6
60°-70°	25.7	0.8
70°-80°	7.3	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1961.9	63.8
0°-40°	2673.3	87.0
0°-60°	3040.3	98.9
0°-90°	3073.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3073.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3048	
5°	2992	280
15°	2626	736
25°	2088	946
35°	1141	711
45°	352	286
55°	84	81
65°	23	26
75°	5	7
85°	0	1
90°	0	

TEST NUMBER: P1500409

CATALOG NUMBER: LD4C40D010 EU4409040 4LBMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3048.1
2.5°	3029.5
5°	2992.4
7.5°	2922.7
10°	2834.6
12.5°	2728.0
15°	2625.9
17.5°	2509.9
20°	2384.6
22.5°	2250.2
25°	2087.7
27.5°	1892.8
30°	1665.6
32.5°	1410.3
35°	1141.3
37.5°	890.7
40°	668.1
42.5°	491.8
45°	352.5
47.5°	241.3
50°	167.1
52.5°	116.0
55°	83.5
57.5°	60.3
60°	46.4
62.5°	32.5
65°	23.2
67.5°	18.6
70°	13.9
72.5°	9.3
75°	4.6
77.5°	4.6
80°	4.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)