

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P1500418

Luminaire Tested: LD4C50D010 EU4509035 4LBMH

Issue Date: 2/8/2022

Test Information

Test Method: LM-79-2019
Report Number: P1500418
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4C50D010 EU4509035 4LBMH
Description: 4 INCH 5000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS AND 4LBM TRIM FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4024.0 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 58.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1500418

CATALOG NUMBER: LD4C50D010 EU4509035 4LBMH

Luminous Intensity Polar Plot

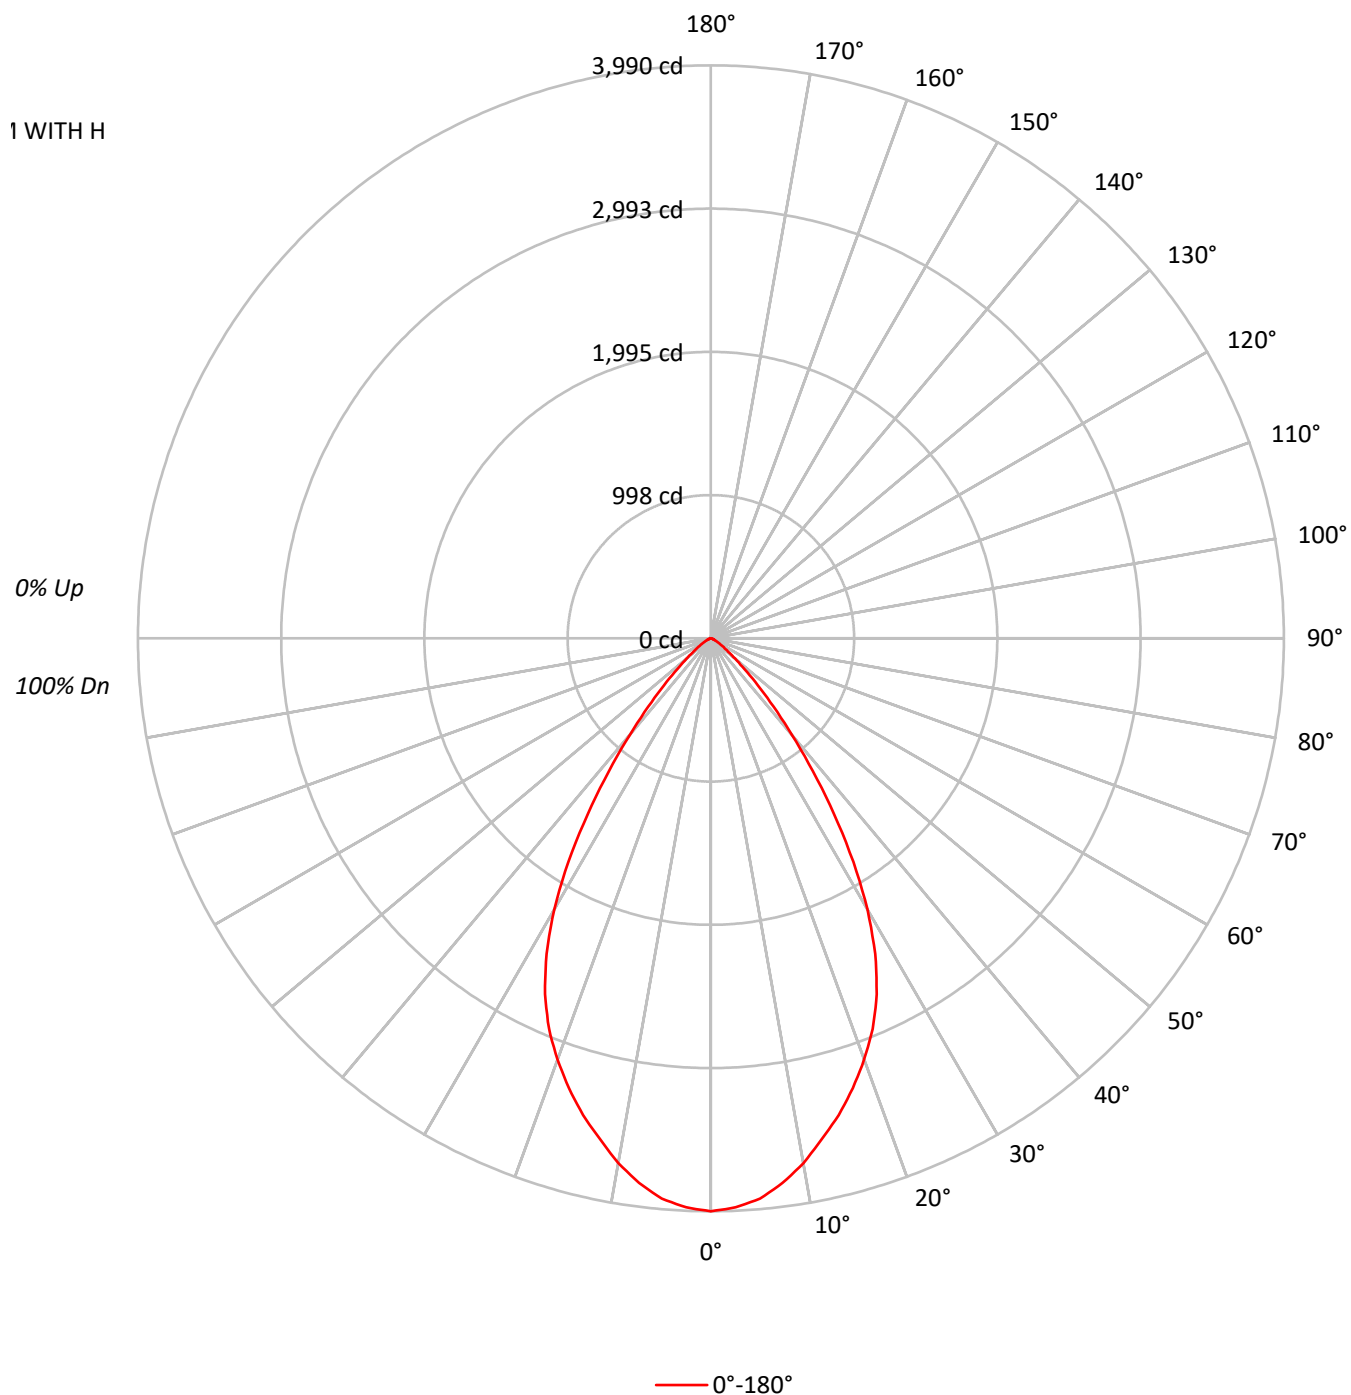

TEST NUMBER: P1500418

CATALOG NUMBER: LD4C50D010 EU4509035 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	82		86
4	96	88	82	77	94	86	81	77	84	80	76		82	78	75		80
5	90	82	75	71	89	81	75	70	79	74	70		77	73	69		75
6	86	76	70	65	84	75	69	65	74	68	64		72	68	64		71
7	81	71	65	60	80	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	56	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	52	49		57	52	48		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	490185
5°	483068
10°	462892
15°	437194
20°	408098
25°	370455
30°	309295
35°	224080
40°	140263
45°	80181
50°	41799
55°	23432
60°	14939
65°	8837
70°	6537
75°	2895
80°	4316
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 80181 cd/sqm

TEST NUMBER: P1500418

CATALOG NUMBER: LD4C50D010 EU4509035 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	367.1	9.1
10°-20°	963.2	23.9
20°-30°	1237.9	30.8
30°-40°	931.3	23.1
40°-50°	374.0	9.3
50°-60°	106.4	2.6
60°-70°	33.7	0.8
70°-80°	9.6	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2568.2	63.8
0°-40°	3499.5	87.0
0°-60°	3979.9	98.9
0°-90°	4024.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4024.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3990	
5°	3917	367
15°	3437	963
25°	2733	1238
35°	1494	931
45°	462	374
55°	109	106
65°	30	34
75°	6	10
85°	0	1
90°	0	

TEST NUMBER: P1500418

CATALOG NUMBER: LD4C50D010 EU4509035 4LBMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3990.0
2.5°	3965.7
5°	3917.1
7.5°	3826.0
10°	3710.6
12.5°	3571.1
15°	3437.4
17.5°	3285.5
20°	3121.5
22.5°	2945.6
25°	2732.9
27.5°	2477.8
30°	2180.3
32.5°	1846.2
35°	1494.1
37.5°	1166.0
40°	874.6
42.5°	643.7
45°	461.5
47.5°	315.9
50°	218.7
52.5°	151.9
55°	109.4
57.5°	79.0
60°	60.8
62.5°	42.5
65°	30.4
67.5°	24.3
70°	18.2
72.5°	12.2
75°	6.1
77.5°	6.1
80°	6.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)