

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856911

Luminaire Tested: **LX4C15D010 EX4C159027 4LBMDLI**

Issue Date: 2/18/2022



Test Information

Test Method: LM-79-08
Report Number: P856911
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-8)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159027 4LBMDLI
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LRMD45 TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1227.0 lumens
Efficiency: N/A
Efficacy: 77.7 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.82
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856911

CATALOG NUMBER: LX4C15D010 EX4C159027 4LBMDLI

Luminous Intensity Polar Plot

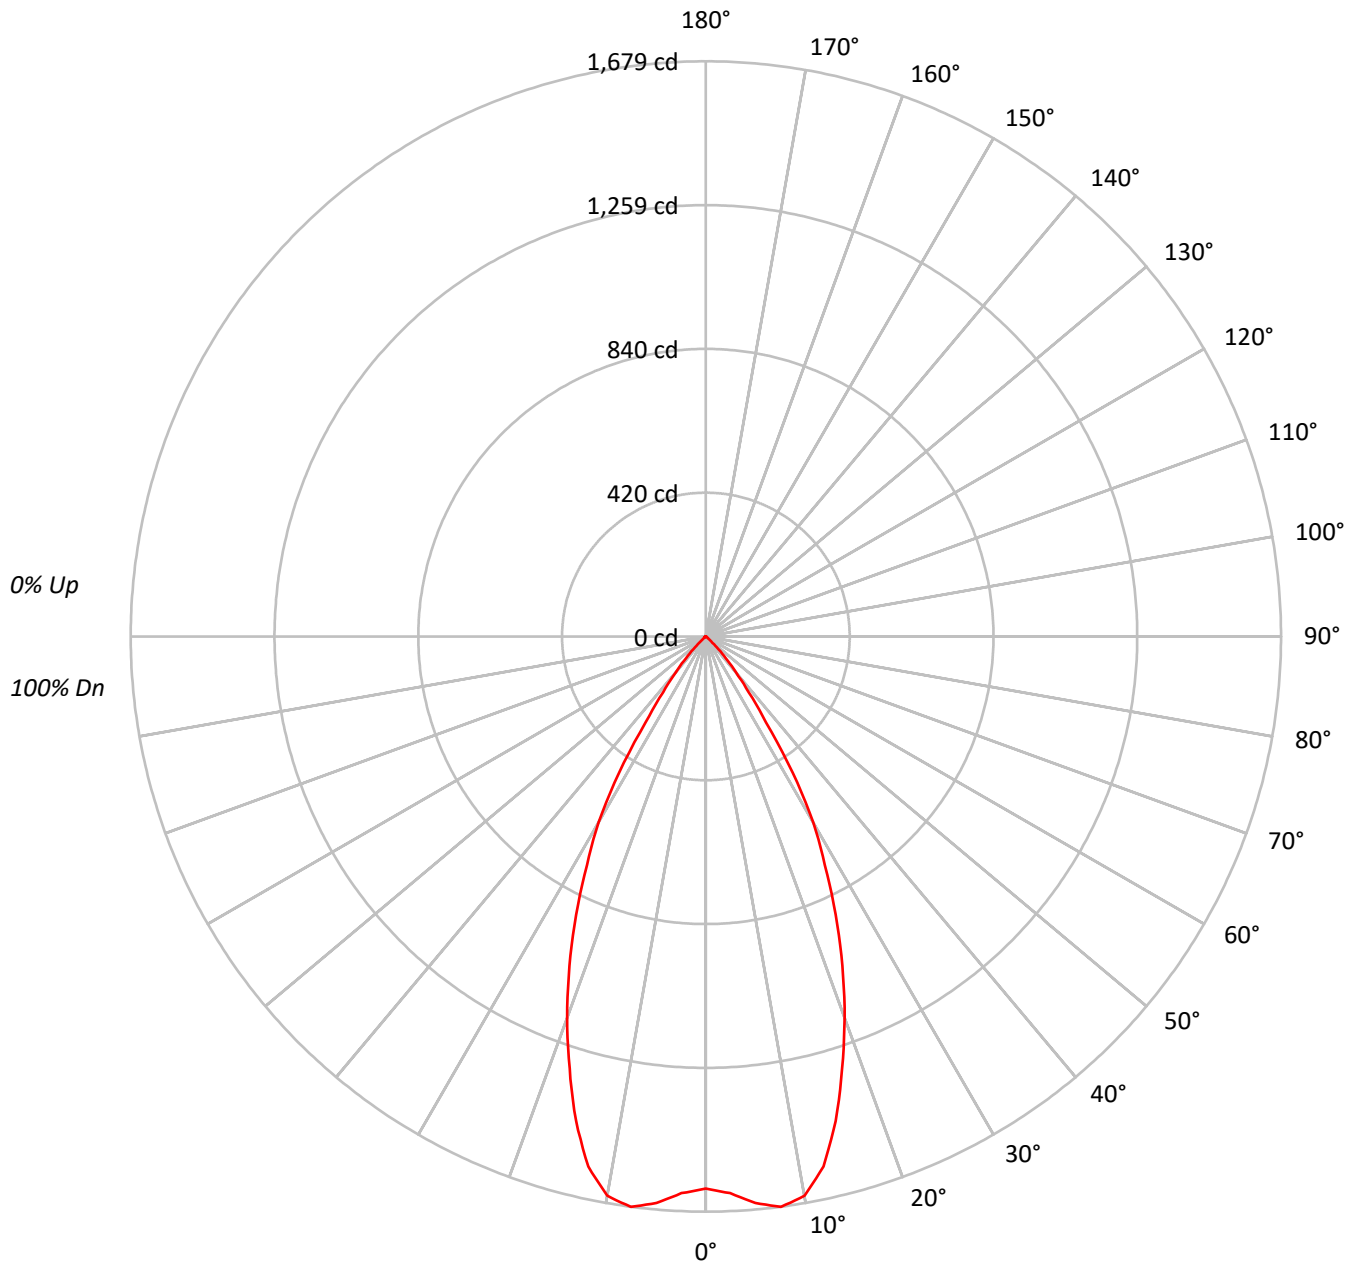



TEST NUMBER: P856911

CATALOG NUMBER: LX4C15D010 EX4C159027 4LBMDLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85
5	94	87	81	77	93	86	81	77	84	79	76		82	78	75		81
6	90	82	76	72	89	81	76	72	79	75	71		78	74	71		77
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73
8	82	73	68	64	81	73	67	64	72	67	63		71	66	63		70
9	79	70	64	60	78	69	64	60	68	63	60		67	63	60		66
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	197991
5°	204728
10°	206808
15°	186291
20°	154820
25°	121456
30°	88889
35°	45938
40°	21811
45°	7679
50°	1739
55°	1135
60°	786
65°	581
70°	431
75°	285
80°	212
85°	0



TEST NUMBER: P856911

CATALOG NUMBER: LX4C15D010 EX4C159027 4LBMDLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.6	12.9
10°-20°	403.4	32.9
20°-30°	408.2	33.3
30°-40°	208.1	17.0
40°-50°	40.8	3.3
50°-60°	4.9	0.4
60°-70°	2.0	0.2
70°-80°	0.8	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	970.2	79.1
0°-40°	1178.4	96.0
0°-60°	1224.1	99.8
0°-90°	1227.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1227.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1612	
5°	1660	159
15°	1465	403
25°	896	408
35°	306	208
45°	44	41
55°	5	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P856911

CATALOG NUMBER: LX4C15D010 EX4C159027 4LBMDLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1611.6
2.5°	1626.5
5°	1660.1
7.5°	1679.4
10°	1657.8
12.5°	1585.0
15°	1464.7
17.5°	1322.8
20°	1184.2
22.5°	1040.5
25°	896.0
27.5°	752.1
30°	626.6
32.5°	472.2
35°	306.3
37.5°	205.1
40°	136.0
42.5°	85.4
45°	44.2
47.5°	15.8
50°	9.1
52.5°	6.7
55°	5.3
57.5°	4.1
60°	3.2
62.5°	2.6
65°	2.0
67.5°	1.5
70°	1.2
72.5°	0.9
75°	0.6
77.5°	0.6
80°	0.3
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)