

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856934

Luminaire Tested: **LX4C15D010 EX4C159030 4LBMDLI**

Issue Date: 2/18/2022



Test Information

Test Method: LM-79-08
Report Number: P856934
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-8)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159030 4LBMDLI
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LRMD45 TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1275.9 lumens
Efficiency: N/A
Efficacy: 80.8 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.82
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856934

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBMDLI

Luminous Intensity Polar Plot

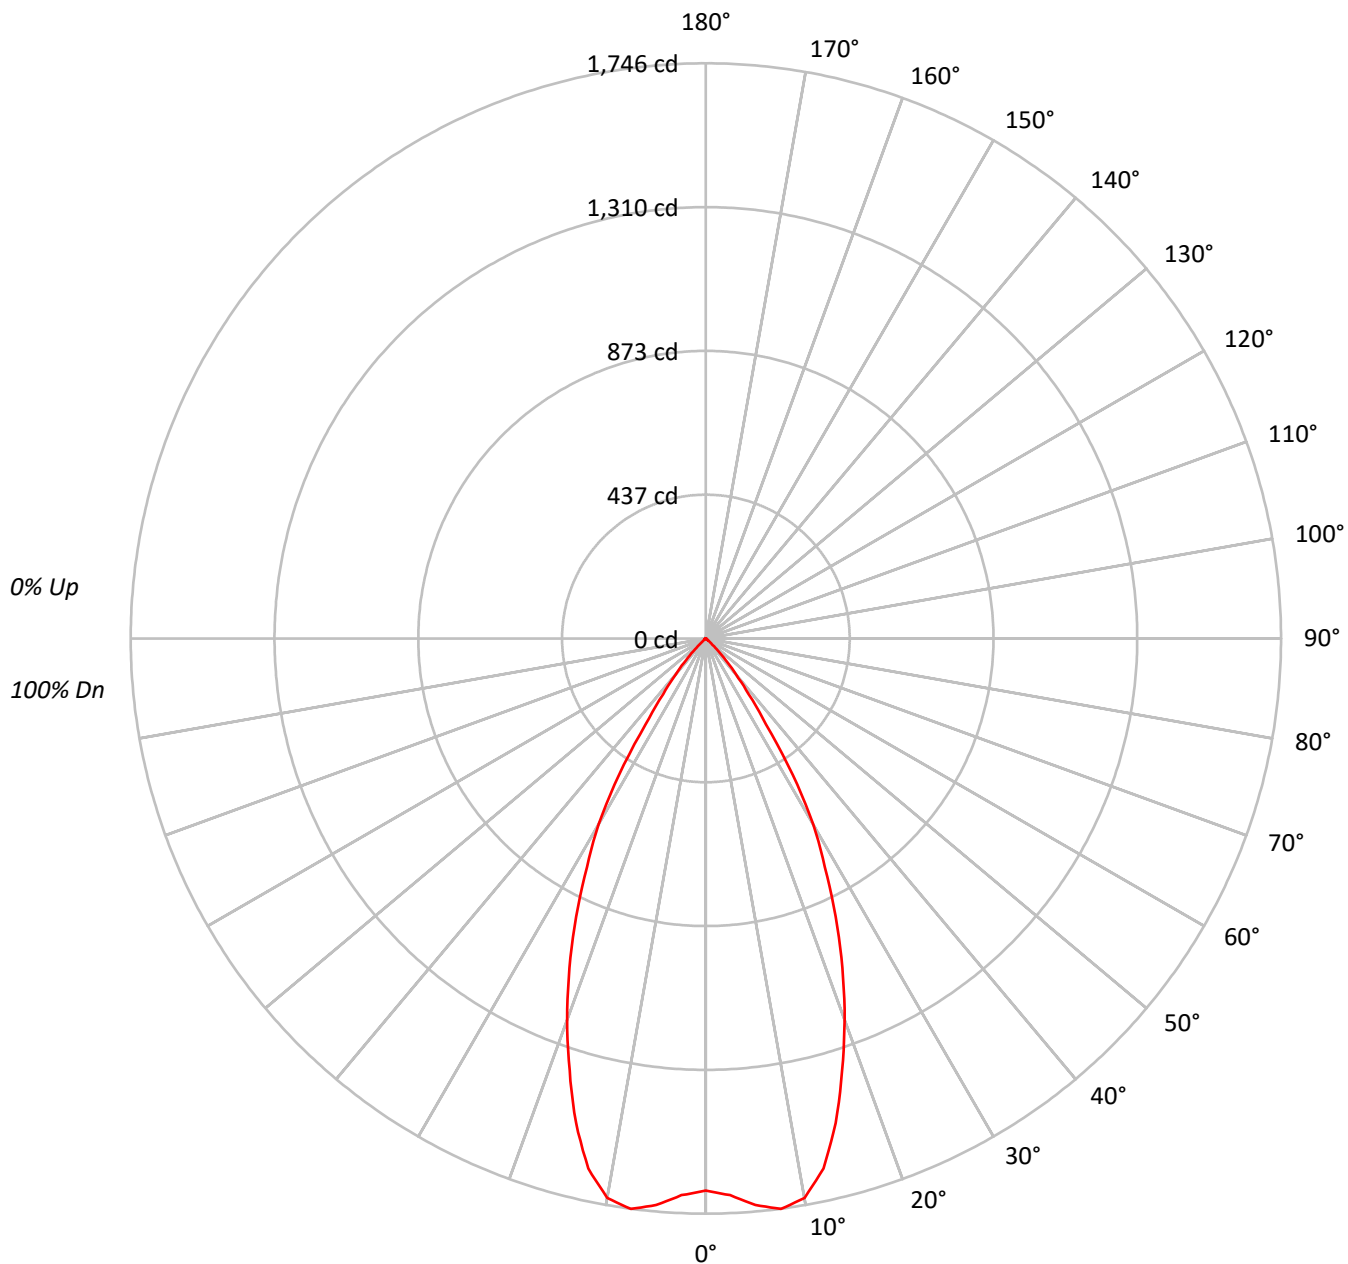



TEST NUMBER: P856934

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBMDLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85
5	94	87	81	77	93	86	81	77	84	79	76		82	78	75		81
6	90	82	76	72	89	81	76	72	80	75	71		78	74	71		77
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73
8	82	73	68	64	81	73	67	64	72	67	63		71	66	63		70
9	79	70	64	60	78	69	64	60	68	63	60		67	63	60		66
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205890
5°	212904
10°	215067
15°	193732
20°	161004
25°	126309
30°	92435
35°	47767
40°	22693
45°	7975
50°	1797
55°	1178
60°	811
65°	610
70°	431
75°	285
80°	212
85°	0



TEST NUMBER: P856934

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBMDLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.9	12.9
10°-20°	419.6	32.9
20°-30°	424.5	33.3
30°-40°	216.4	17.0
40°-50°	42.4	3.3
50°-60°	5.1	0.4
60°-70°	2.1	0.2
70°-80°	0.8	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1009.0	79.1
0°-40°	1225.4	96.0
0°-60°	1273.0	99.8
0°-90°	1275.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1275.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1676	
5°	1726	165
15°	1523	420
25°	932	425
35°	318	216
45°	46	42
55°	6	5
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P856934

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBMDLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1675.9
2.5°	1691.4
5°	1726.4
7.5°	1746.5
10°	1724.0
12.5°	1648.2
15°	1523.2
17.5°	1375.7
20°	1231.5
22.5°	1082.1
25°	931.8
27.5°	782.1
30°	651.6
32.5°	491.0
35°	318.5
37.5°	213.3
40°	141.5
42.5°	88.8
45°	45.9
47.5°	16.4
50°	9.4
52.5°	7.0
55°	5.5
57.5°	4.3
60°	3.3
62.5°	2.7
65°	2.1
67.5°	1.5
70°	1.2
72.5°	0.9
75°	0.6
77.5°	0.6
80°	0.3
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)