

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856938

Luminaire Tested: **LX4C15D010 EX4C159030 4LBNLI**

Issue Date: 1/21/2022



Test Information

Test Method: LM-79-08
Report Number: P856938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/21/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159030 4LBNLI
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBN TRIM WITH LI FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1137.0 lumens
Efficiency: N/A
Efficacy: 72.0 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856938

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBNLI

Luminous Intensity Polar Plot

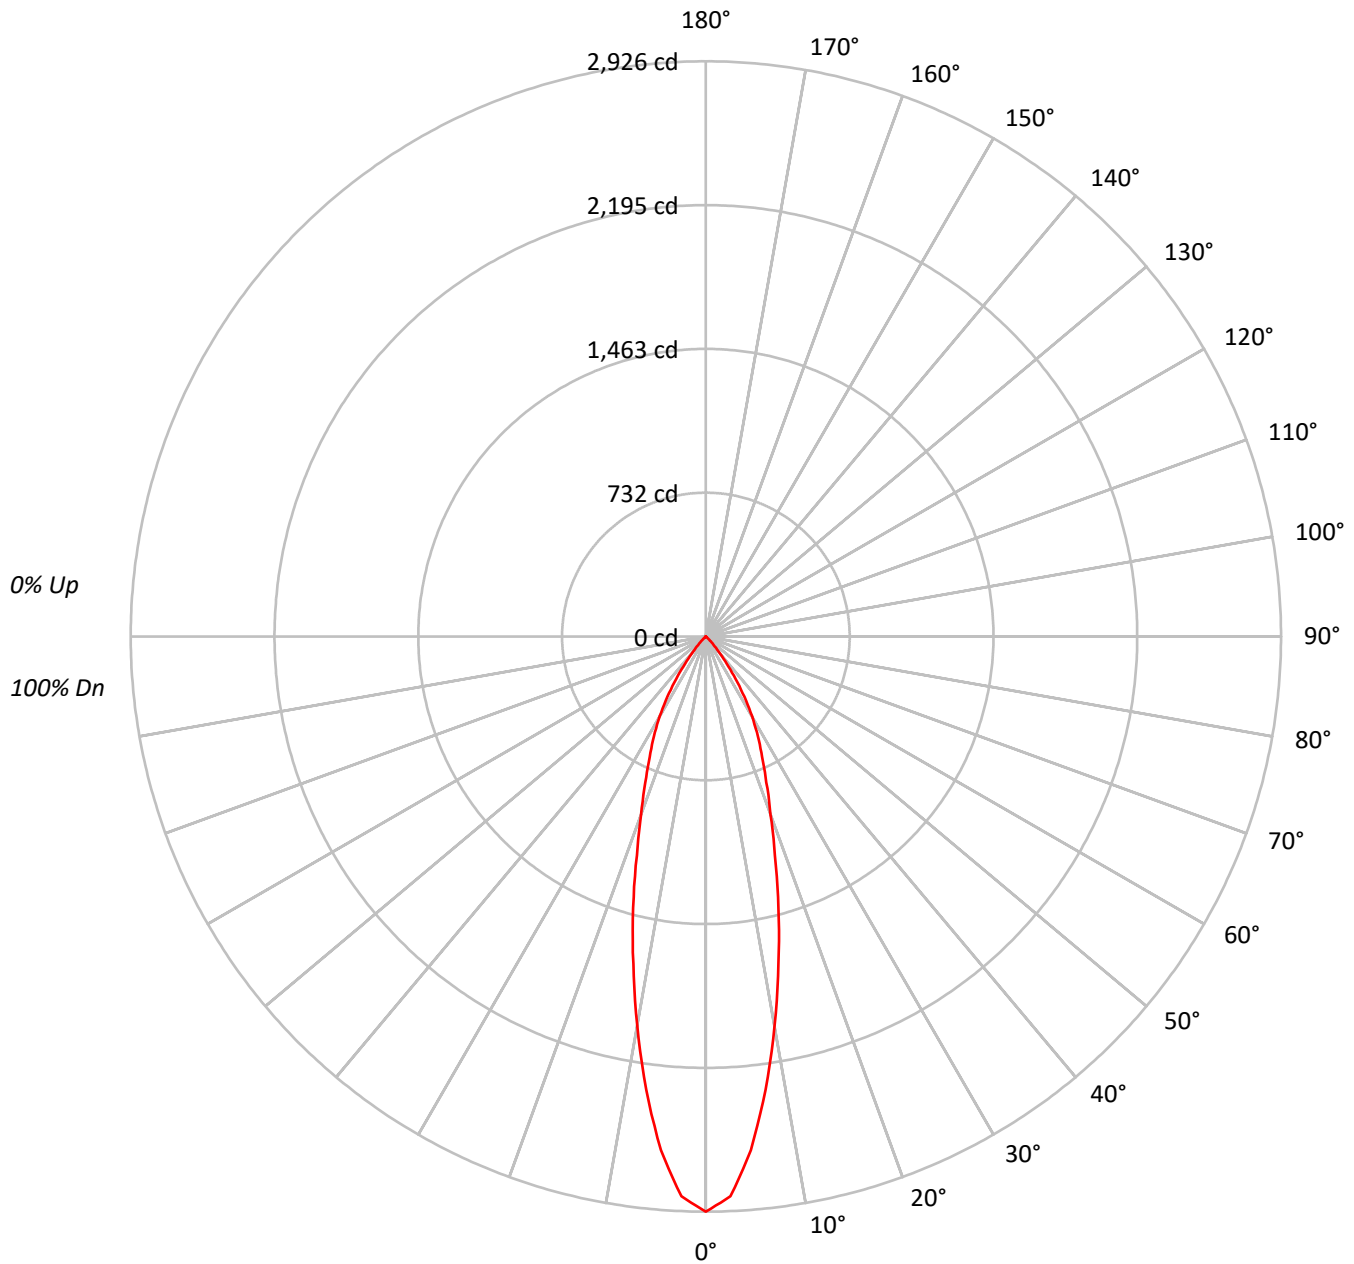



TEST NUMBER: P856938

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBNLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	359469
5°	323488
10°	250770
15°	181509
20°	125678
25°	91621
30°	66574
35°	39399
40°	16567
45°	5160
50°	669
55°	386
60°	442
65°	523
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P856938

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBNLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	230.6	20.3
10°-20°	394.8	34.7
20°-30°	313.7	27.6
30°-40°	166.1	14.6
40°-50°	28.6	2.5
50°-60°	2.2	0.2
60°-70°	1.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	939.1	82.6
0°-40°	1105.2	97.2
0°-60°	1135.9	99.9
0°-90°	1137.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1137.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2926	
5°	2623	231
15°	1427	395
25°	676	314
35°	263	166
45°	30	29
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P856938

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBNLI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2926.0
2.5°	2850.7
5°	2623.1
7.5°	2325.4
10°	2010.2
12.5°	1705.5
15°	1427.1
17.5°	1167.9
20°	961.3
22.5°	803.7
25°	675.9
27.5°	572.6
30°	469.3
32.5°	364.2
35°	262.7
37.5°	173.4
40°	103.3
42.5°	59.5
45°	29.7
47.5°	10.5
50°	3.5
52.5°	3.5
55°	1.8
57.5°	1.8
60°	1.8
62.5°	1.8
65°	1.8
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)