

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856940

Luminaire Tested: **LX4C15D010 EX4C159030 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P856940
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159030 4LBSLI
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1582.0 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856940

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBSLI

Luminous Intensity Polar Plot

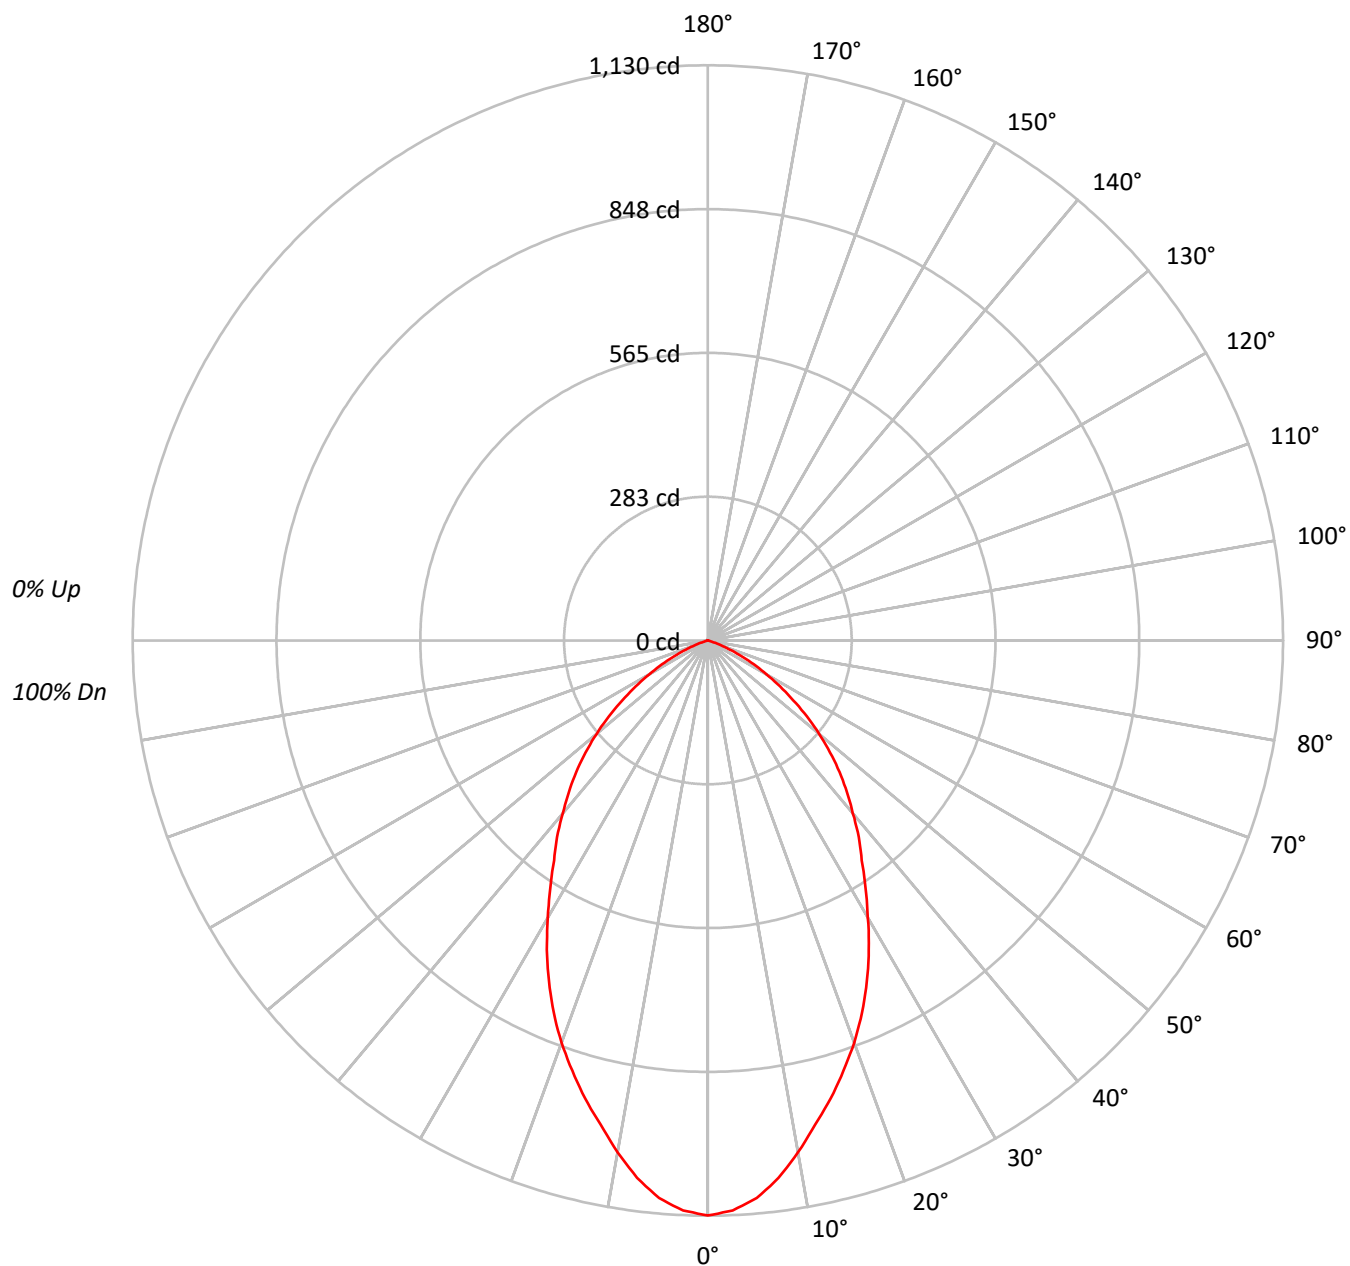



TEST NUMBER: P856940

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	108	105	102	109	106	103	101	102	100	98		98	96	95		95
2	104	98	93	88	102	96	91	87	93	89	85		90	86	84		87
3	97	89	82	77	95	87	81	77	84	79	75		82	78	74		79
4	90	81	73	68	88	79	73	68	77	71	67		75	70	66		73
5	84	73	66	61	82	72	65	60	70	64	60		69	63	59		67
6	79	67	60	54	77	66	59	54	65	58	54		63	58	53		62
7	74	62	54	49	72	61	54	49	60	53	49		58	53	48		57
8	69	57	50	45	68	57	50	45	55	49	45		54	49	44		53
9	65	53	46	41	64	53	46	41	52	45	41		51	45	41		50
10	61	50	43	38	60	49	42	38	48	42	38		47	42	38		46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	138775
5°	135630
10°	127368
15°	118500
20°	109898
25°	100188
30°	89187
35°	79053
40°	71062
45°	63589
50°	54566
55°	43887
60°	32704
65°	20872
70°	10058
75°	1661
80°	1203
85°	0



TEST NUMBER: P856940

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.4	6.5
10°-20°	261.2	16.5
20°-30°	338.5	21.4
30°-40°	331.7	21.0
40°-50°	281.1	17.8
50°-60°	184.3	11.6
60°-70°	74.1	4.7
70°-80°	8.4	0.5
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	702.2	44.4
0°-40°	1033.8	65.3
0°-60°	1499.2	94.8
0°-90°	1582.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1582.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1130	
5°	1100	102
15°	932	261
25°	739	339
35°	527	332
45°	366	281
55°	205	184
65°	72	74
75°	4	8
85°	0	0
90°	0	



TEST NUMBER: P856940

CATALOG NUMBER: LX4C15D010 EX4C159030 4LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1129.6
2.5°	1120.8
5°	1099.8
7.5°	1064.8
10°	1021.0
12.5°	973.7
15°	931.7
17.5°	886.2
20°	840.6
22.5°	791.6
25°	739.1
27.5°	684.8
30°	628.7
32.5°	576.2
35°	527.1
37.5°	486.9
40°	443.1
42.5°	404.6
45°	366.0
47.5°	325.7
50°	285.5
52.5°	245.2
55°	204.9
57.5°	168.1
60°	133.1
62.5°	101.6
65°	71.8
67.5°	47.3
70°	28.0
72.5°	12.2
75°	3.5
77.5°	1.7
80°	1.7
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)