

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857004

Luminaire Tested: **LX4C15D010 EX4C159050 4LBMH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857004
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159050 4LBMH
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBM TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1204.0 lumens
Efficiency: N/A
Efficacy: 76.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857004

CATALOG NUMBER: LX4C15D010 EX4C159050 4LBMH

Luminous Intensity Polar Plot

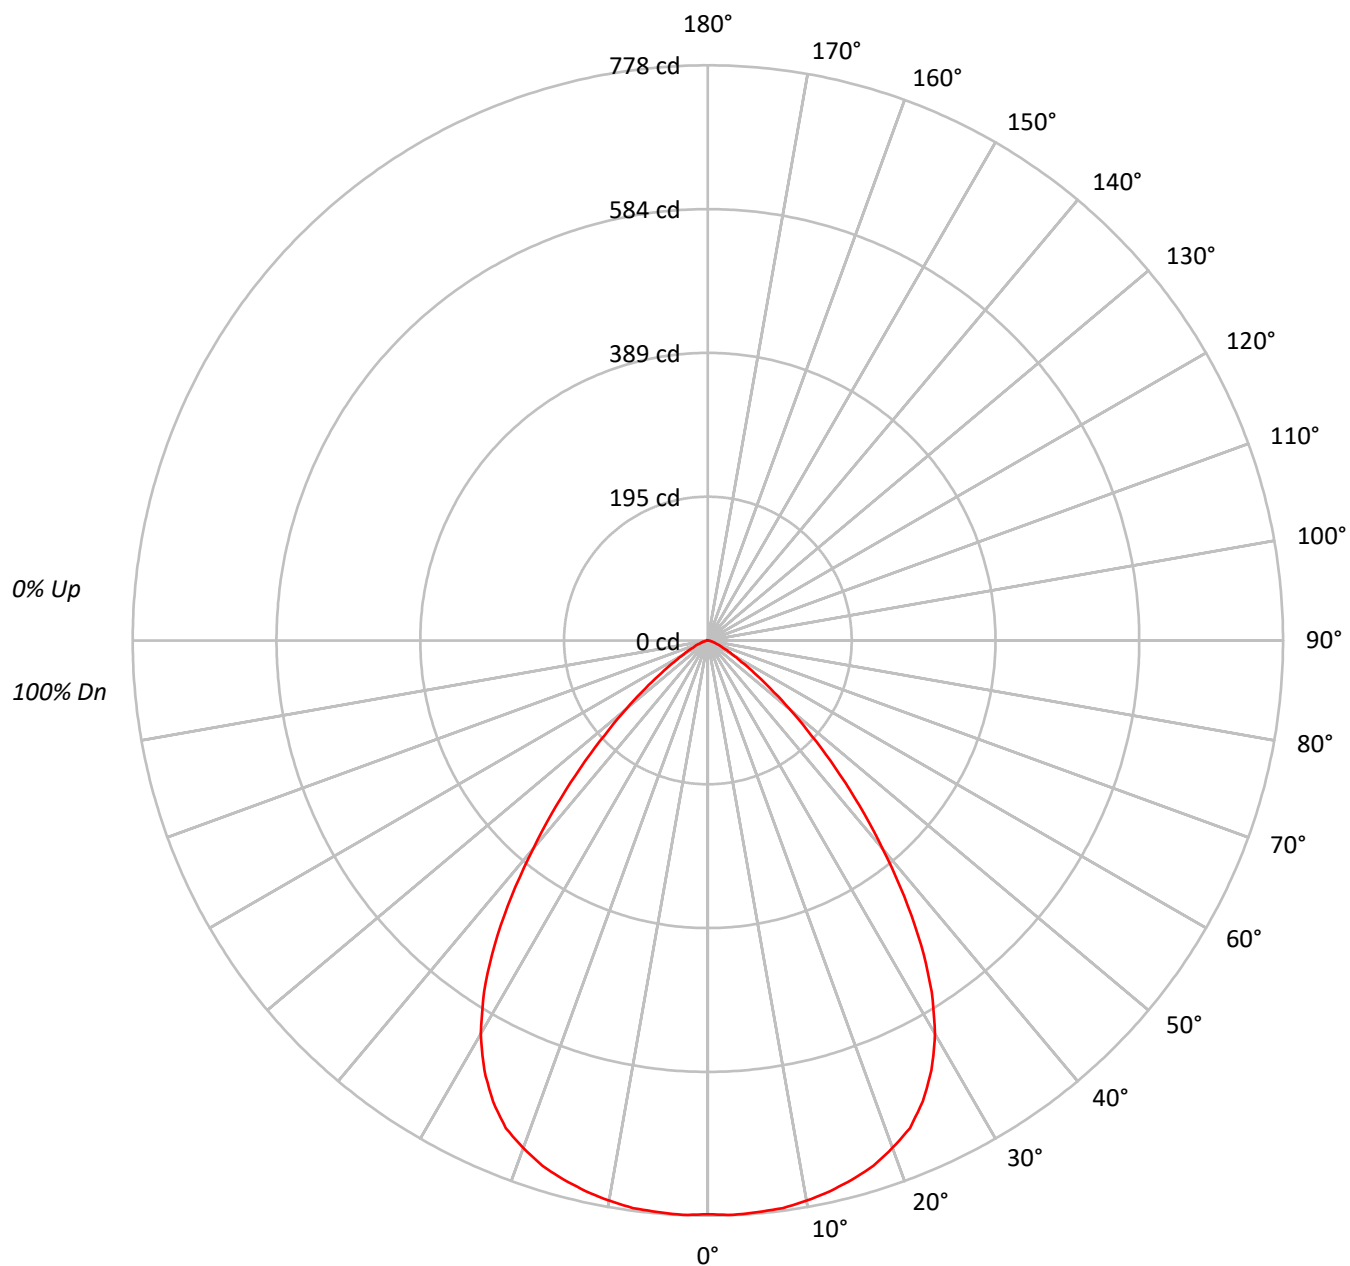



TEST NUMBER: P857004

CATALOG NUMBER: LX4C15D010 EX4C159050 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	95334
5°	95698
10°	95994
15°	96001
20°	95478
25°	93234
30°	87144
35°	75468
40°	58953
45°	42289
50°	27484
55°	16450
60°	9632
65°	6192
70°	4095
75°	3085
80°	2335
85°	0



TEST NUMBER: P857004

CATALOG NUMBER: LX4C15D010 EX4C159050 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.9	6.1
10°-20°	213.0	17.7
20°-30°	314.2	26.1
30°-40°	310.1	25.8
40°-50°	189.8	15.8
50°-60°	72.8	6.0
60°-70°	22.8	1.9
70°-80°	6.7	0.6
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	601.1	49.9
0°-40°	911.2	75.7
0°-60°	1173.7	97.5
0°-90°	1204.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1204.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	776	
5°	776	74
15°	755	213
25°	688	314
35°	503	310
45°	243	190
55°	77	73
65°	21	23
75°	6	7
85°	0	1
90°	0	



TEST NUMBER: P857004

CATALOG NUMBER: LX4C15D010 EX4C159050 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	776.0
2.5°	777.7
5°	776.0
7.5°	774.4
10°	769.5
12.5°	763.0
15°	754.8
17.5°	745.0
20°	730.3
22.5°	714.0
25°	687.8
27.5°	655.1
30°	614.3
32.5°	563.7
35°	503.2
37.5°	436.2
40°	367.6
42.5°	303.9
45°	243.4
47.5°	189.5
50°	143.8
52.5°	106.2
55°	76.8
57.5°	53.9
60°	39.2
62.5°	29.4
65°	21.3
67.5°	16.4
70°	11.4
72.5°	8.2
75°	6.5
77.5°	3.3
80°	3.3
82.5°	1.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)