

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857037

Luminaire Tested: **LX4C15D010 EX4C159830 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P857037
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C15D010 EX4C159830 4LBMLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1292.1 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857037

CATALOG NUMBER: LX4C15D010 EX4C159830 4LBMLI

Luminous Intensity Polar Plot

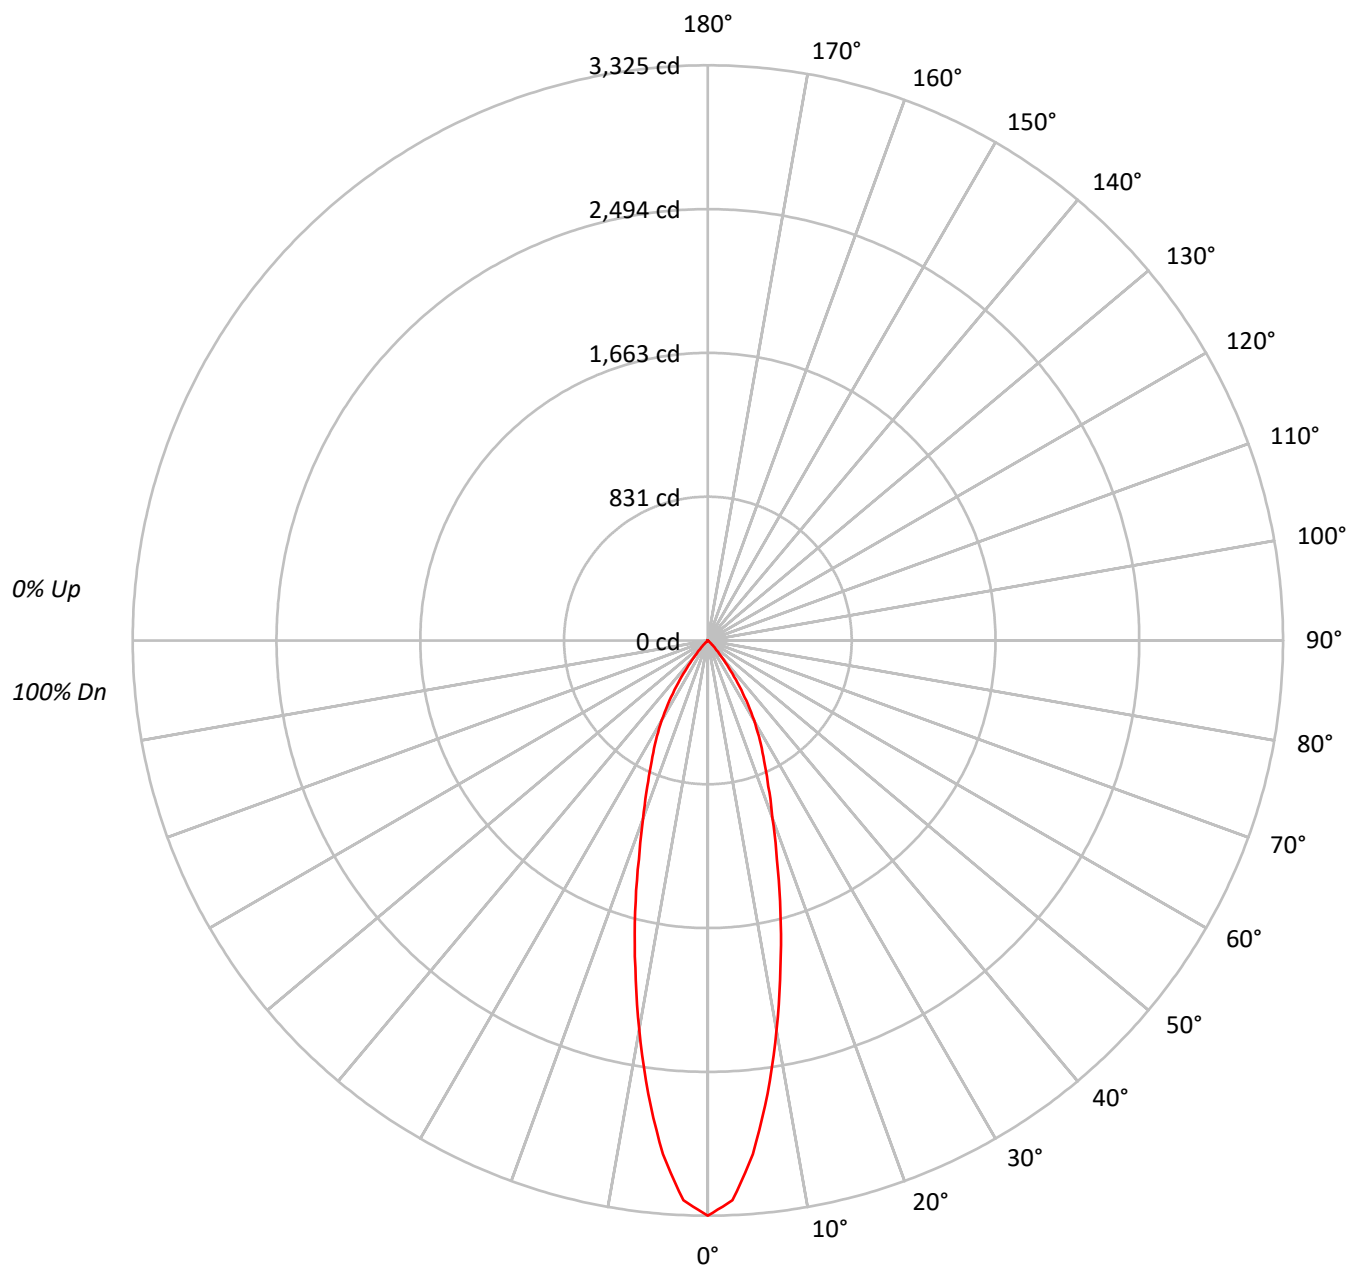



TEST NUMBER: P857037

CATALOG NUMBER: LX4C15D010 EX4C159830 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	408512
5°	367613
10°	284988
15°	206272
20°	142831
25°	104119
30°	75668
35°	44768
40°	18828
45°	5872
50°	765
55°	428
60°	491
65°	581
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P857037

CATALOG NUMBER: LX4C15D010 EX4C159830 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	262.0	20.3
10°-20°	448.6	34.7
20°-30°	356.5	27.6
30°-40°	188.8	14.6
40°-50°	32.5	2.5
50°-60°	2.4	0.2
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1067.2	82.6
0°-40°	1256.0	97.2
0°-60°	1290.9	99.9
0°-90°	1292.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1292.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3325	
5°	2981	262
15°	1622	449
25°	768	357
35°	298	189
45°	34	33
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857037

CATALOG NUMBER: LX4C15D010 EX4C159830 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3325.2
2.5°	3239.6
5°	2980.9
7.5°	2642.7
10°	2284.5
12.5°	1938.2
15°	1621.8
17.5°	1327.3
20°	1092.5
22.5°	913.3
25°	768.1
27.5°	650.7
30°	533.4
32.5°	413.9
35°	298.5
37.5°	197.1
40°	117.4
42.5°	67.7
45°	33.8
47.5°	11.9
50°	4.0
52.5°	4.0
55°	2.0
57.5°	2.0
60°	2.0
62.5°	2.0
65°	2.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)