

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857601

Luminaire Tested: **LX4C30D010 EX4C309050 4LBNH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857601
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309050 4LBNH
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBN TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1903.1 lumens
Efficiency: N/A
Efficacy: 60.2 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857601

CATALOG NUMBER: LX4C30D010 EX4C309050 4LBNH

Luminous Intensity Polar Plot

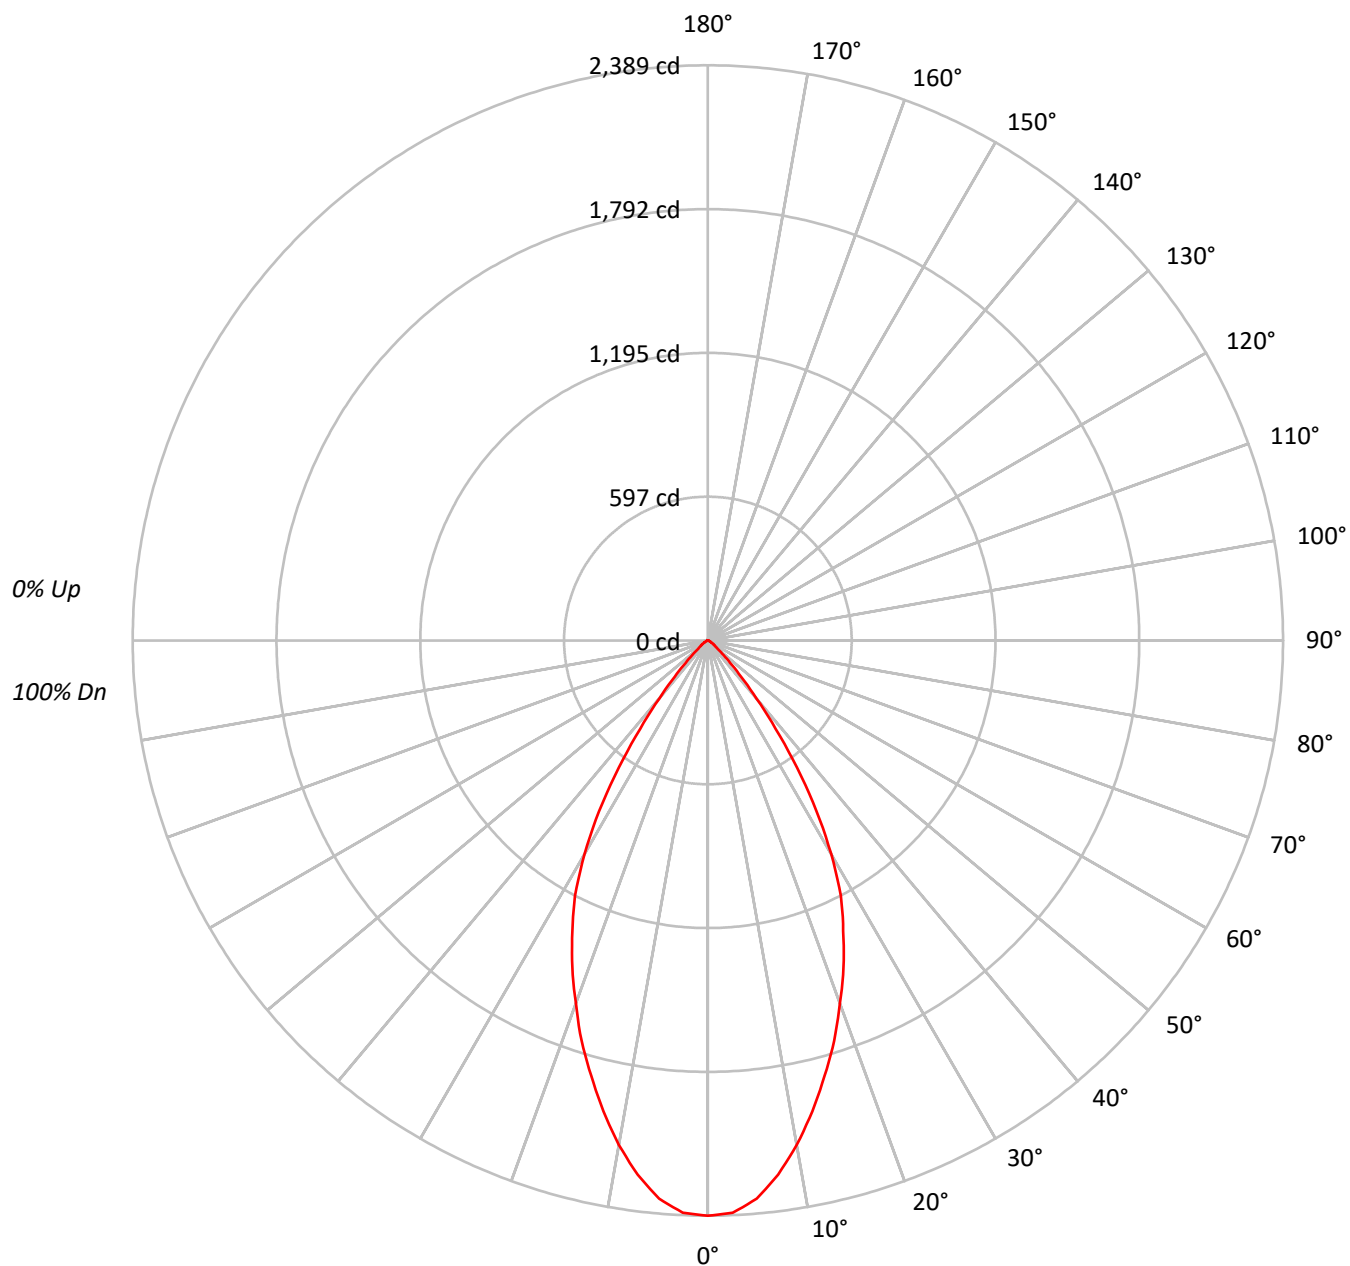



TEST NUMBER: P857601

CATALOG NUMBER: LX4C30D010 EX4C309050 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	69	86	78	72	68	76	72	68		75	71	67		74
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	74	65	60	56	65	59	56		64	59	56		63
10	72	62	57	53	71	62	56	53	61	56	53		60	56	52		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	293534
5°	286997
10°	265365
15°	238107
20°	209599
25°	180381
30°	145264
35°	96705
40°	50309
45°	22777
50°	9881
55°	6640
60°	4251
65°	3023
70°	2478
75°	1661
80°	0
85°	0



TEST NUMBER: P857601

CATALOG NUMBER: LX4C30D010 EX4C309050 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	215.6	11.3
10°-20°	522.9	27.5
20°-30°	607.1	31.9
30°-40°	402.0	21.1
40°-50°	112.8	5.9
50°-60°	28.3	1.5
60°-70°	10.6	0.6
70°-80°	3.7	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1345.6	70.7
0°-40°	1747.6	91.8
0°-60°	1888.7	99.2
0°-90°	1903.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1903.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2389	
5°	2327	216
15°	1872	523
25°	1331	607
35°	645	402
45°	131	113
55°	31	28
65°	10	11
75°	4	4
85°	0	0
90°	0	



TEST NUMBER: P857601

CATALOG NUMBER: LX4C30D010 EX4C309050 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2389.3
2.5°	2378.9
5°	2327.2
7.5°	2237.5
10°	2127.2
12.5°	2003.0
15°	1872.1
17.5°	1744.5
20°	1603.2
22.5°	1472.2
25°	1330.7
27.5°	1196.4
30°	1024.0
32.5°	841.2
35°	644.8
37.5°	462.0
40°	313.7
42.5°	203.4
45°	131.1
47.5°	79.4
50°	51.7
52.5°	37.9
55°	31.0
57.5°	24.2
60°	17.3
62.5°	13.8
65°	10.4
67.5°	6.9
70°	6.9
72.5°	3.5
75°	3.5
77.5°	3.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)