

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857619

Luminaire Tested: **LX4C30D010 EX4C309827 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P857619
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309827 4LBMLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2364.0 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857619

CATALOG NUMBER: LX4C30D010 EX4C309827 4LBMLI

Luminous Intensity Polar Plot

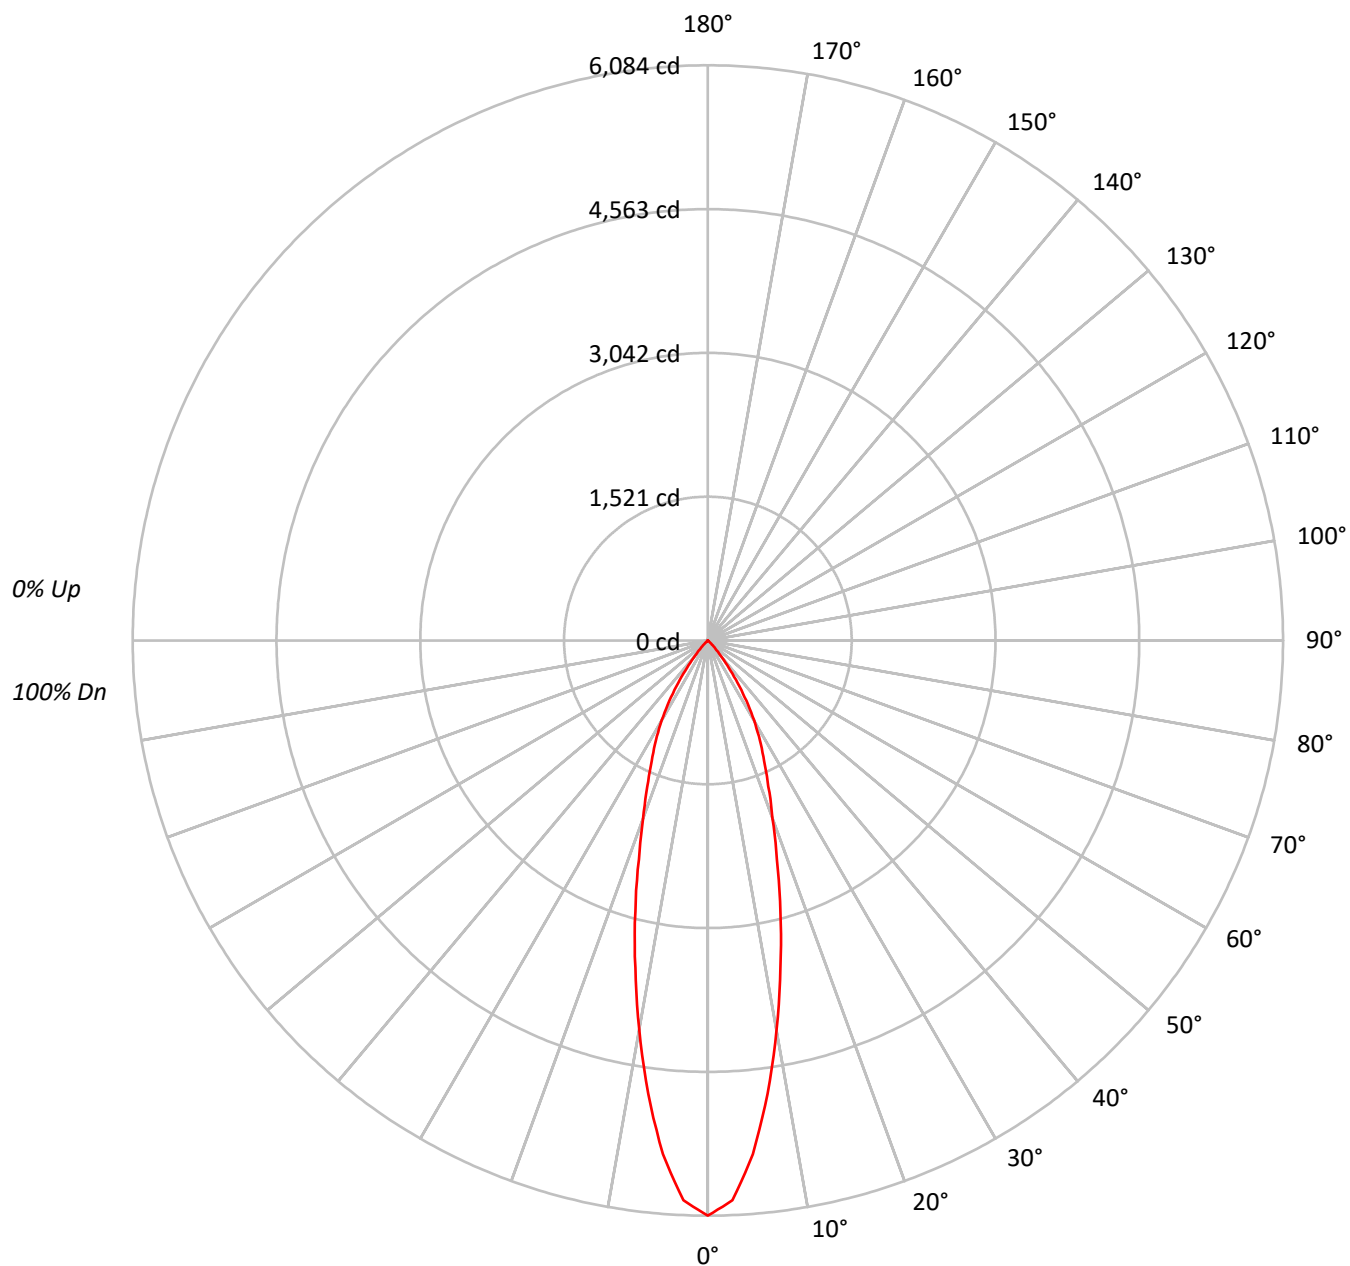



TEST NUMBER: P857619

CATALOG NUMBER: LX4C30D010 EX4C309827 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90		
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73		
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66		
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63		
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	747391
5°	672578
10°	521387
15°	377377
20°	261306
25°	190494
30°	138412
35°	81902
40°	34448
45°	10737
50°	1395
55°	792
60°	909
65°	1076
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P857619

CATALOG NUMBER: LX4C30D010 EX4C309827 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	479.4	20.3
10°-20°	820.8	34.7
20°-30°	652.3	27.6
30°-40°	345.3	14.6
40°-50°	59.5	2.5
50°-60°	4.5	0.2
60°-70°	2.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1952.5	82.6
0°-40°	2297.8	97.2
0°-60°	2361.8	99.9
0°-90°	2364.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2364.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6084	
5°	5454	479
15°	2967	821
25°	1405	652
35°	546	345
45°	62	59
55°	4	4
65°	4	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857619

CATALOG NUMBER: LX4C30D010 EX4C309827 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	6083.6
2.5°	5927.0
5°	5453.8
7.5°	4834.9
10°	4179.5
12.5°	3546.1
15°	2967.1
17.5°	2428.3
20°	1998.7
22.5°	1671.0
25°	1405.3
27.5°	1190.6
30°	975.7
32.5°	757.3
35°	546.1
37.5°	360.5
40°	214.8
42.5°	123.8
45°	61.8
47.5°	21.8
50°	7.3
52.5°	7.3
55°	3.7
57.5°	3.7
60°	3.7
62.5°	3.7
65°	3.7
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)