

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857664

Luminaire Tested: **LX4C30D010 EX4C309840 4LBWH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857664
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309840 4LBWH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2224.0 lumens
Efficiency: N/A
Efficacy: 70.4 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857664

CATALOG NUMBER: LX4C30D010 EX4C309840 4LBWH

Luminous Intensity Polar Plot

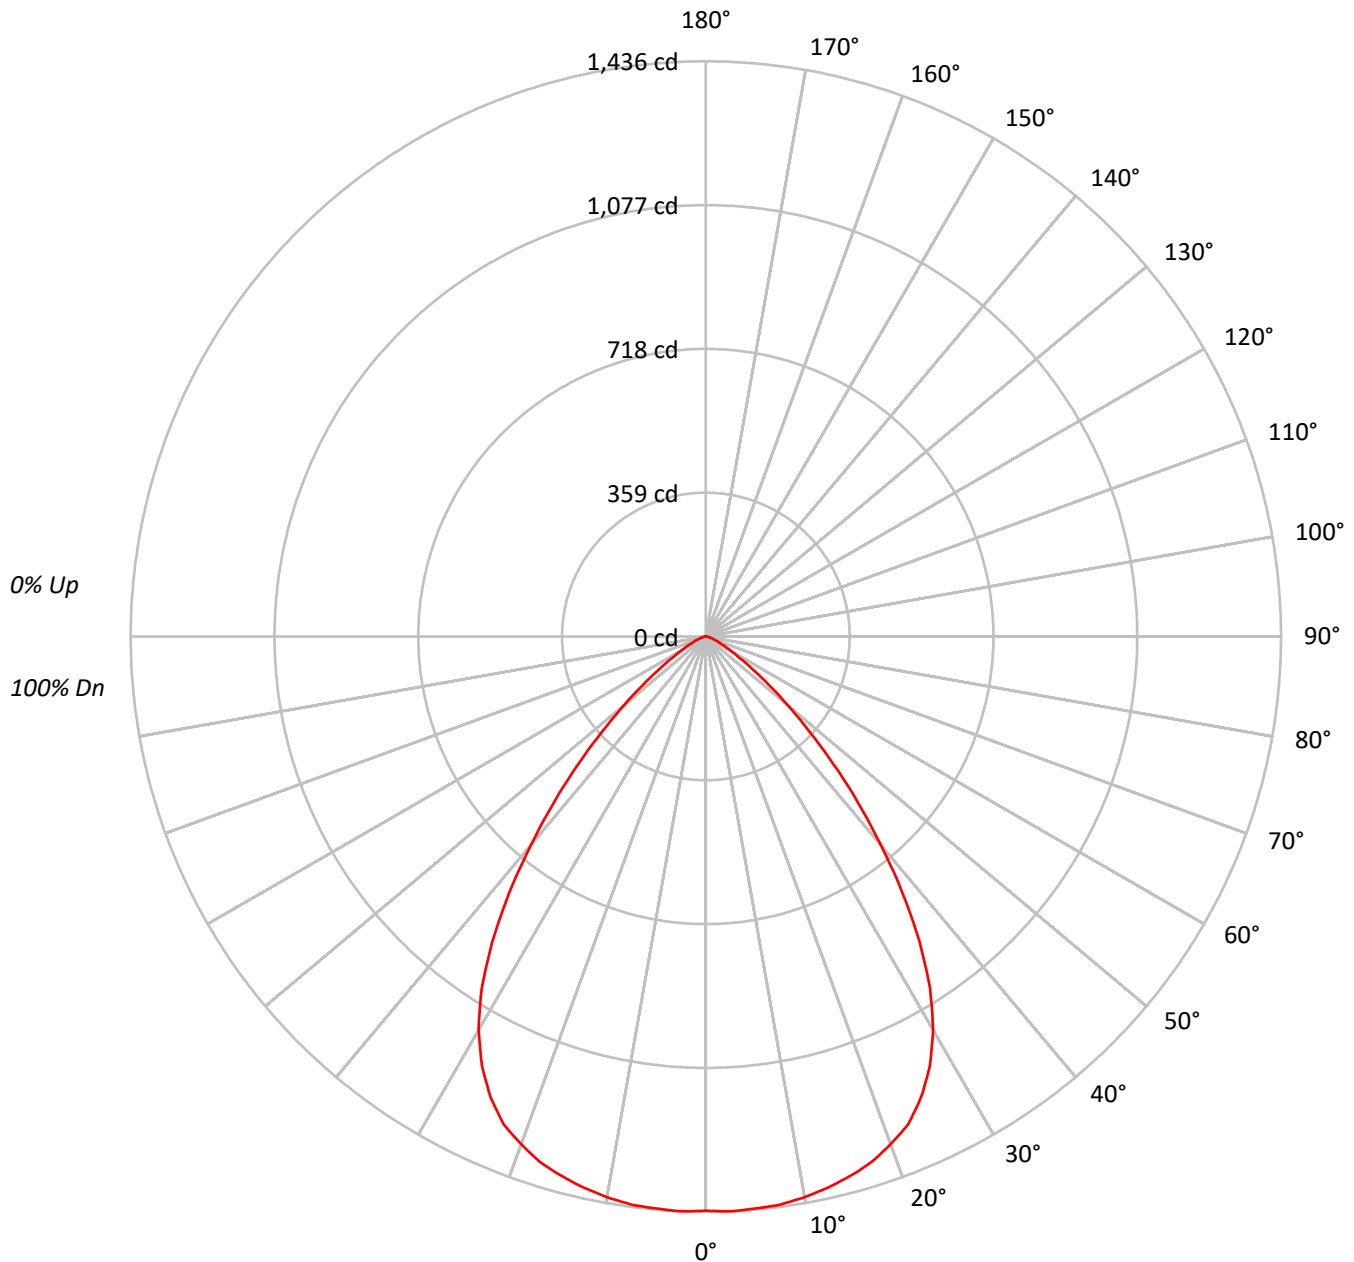



TEST NUMBER: P857664

CATALOG NUMBER: LX4C30D010 EX4C309840 4LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	176110
5°	176783
10°	177318
15°	177325
20°	176352
25°	172235
30°	160967
35°	139403
40°	108894
45°	78131
50°	50763
55°	30393
60°	17765
65°	11395
70°	7579
75°	5743
80°	4316
85°	0



TEST NUMBER: P857664

CATALOG NUMBER: LX4C30D010 EX4C309840 4LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.5	6.1
10°-20°	393.3	17.7
20°-30°	580.5	26.1
30°-40°	572.8	25.8
40°-50°	350.6	15.8
50°-60°	134.4	6.0
60°-70°	42.0	1.9
70°-80°	12.3	0.6
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1110.3	49.9
0°-40°	1683.1	75.7
0°-60°	2168.0	97.5
0°-90°	2224.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2224.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1434	
5°	1434	137
15°	1394	393
25°	1271	580
35°	930	573
45°	450	351
55°	142	134
65°	39	42
75°	12	12
85°	0	2
90°	0	



TEST NUMBER: P857664

CATALOG NUMBER: LX4C30D010 EX4C309840 4LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1433.5
2.5°	1436.5
5°	1433.5
7.5°	1430.4
10°	1421.4
12.5°	1409.3
15°	1394.2
17.5°	1376.1
20°	1348.9
22.5°	1318.9
25°	1270.6
27.5°	1210.1
30°	1134.7
32.5°	1041.2
35°	929.5
37.5°	805.7
40°	679.0
42.5°	561.4
45°	449.7
47.5°	350.0
50°	265.6
52.5°	196.2
55°	141.9
57.5°	99.5
60°	72.3
62.5°	54.4
65°	39.2
67.5°	30.2
70°	21.1
72.5°	15.1
75°	12.1
77.5°	6.1
80°	6.1
82.5°	3.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)