

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857695

Luminaire Tested: **LX4C30D010 EX4C309030 4LBMDLI**

Issue Date: 2/18/2022



Test Information

Test Method: LM-79-08
Report Number: P857695
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-8)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309030 4LBMDLI
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LRMD45 TRIM WITH LI FINISH, DIM TO WARM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2271.3 lumens
Efficiency: N/A
Efficacy: 64.9 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.82
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 35
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857695

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMDLI

Luminous Intensity Polar Plot

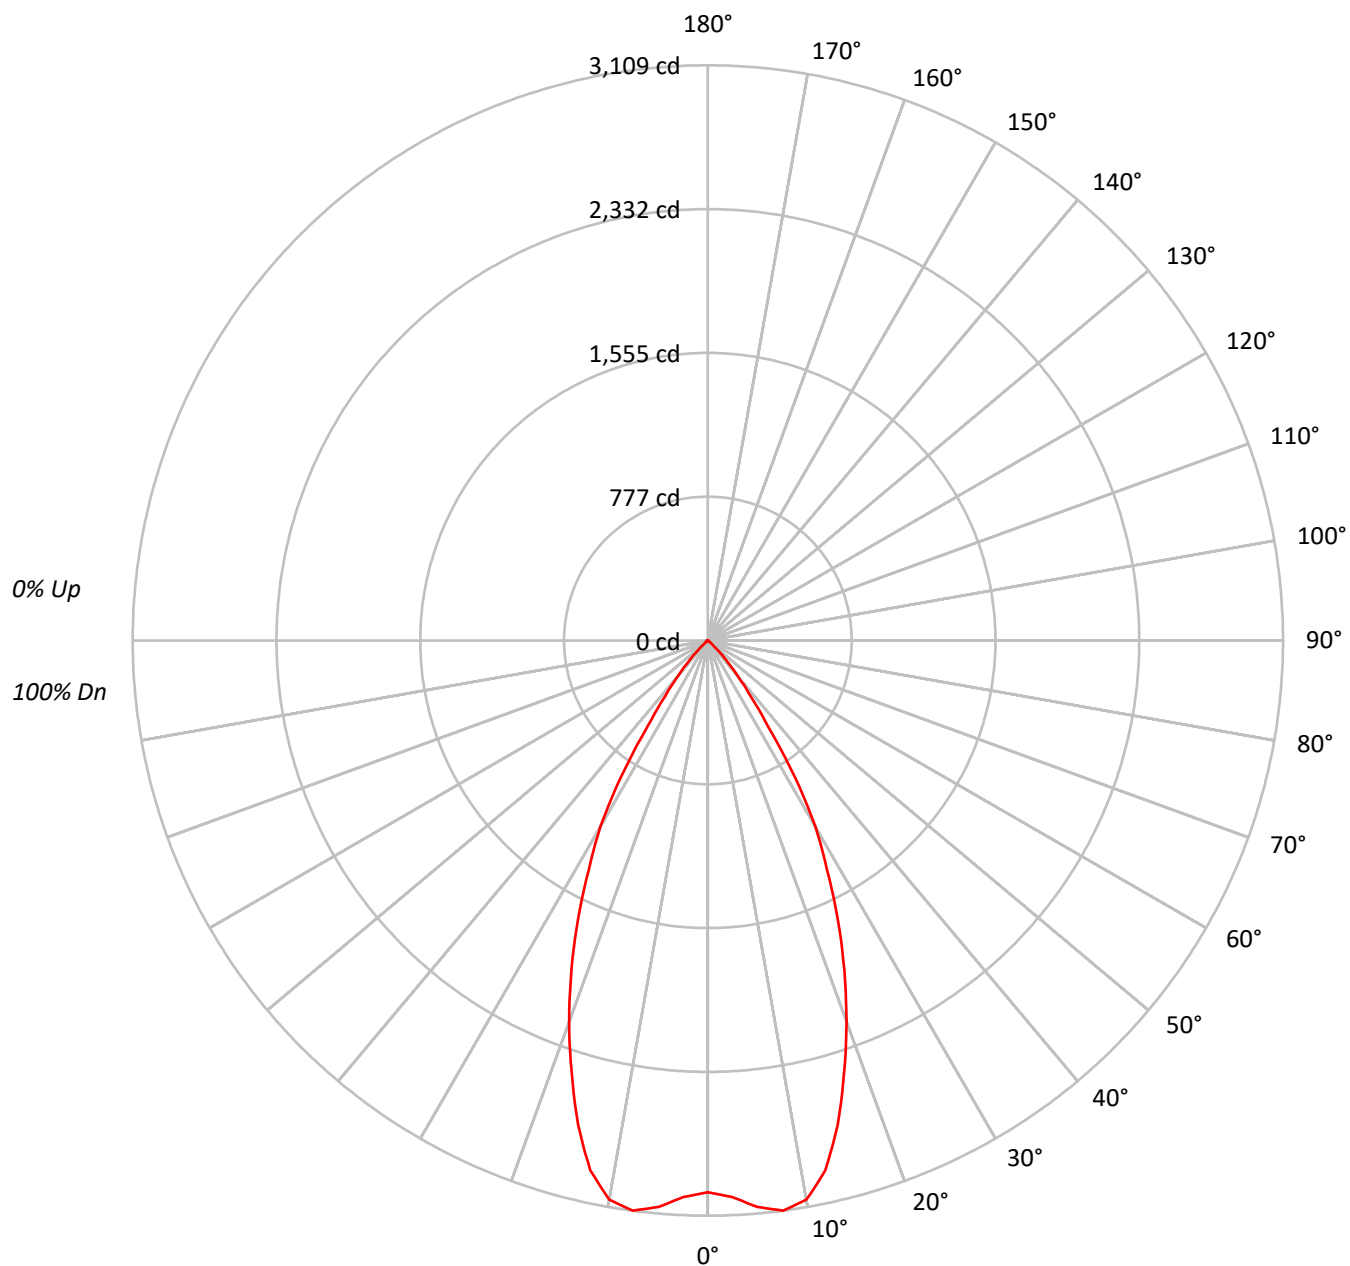



TEST NUMBER: P857695

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMDLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	111	109	107	105	105	103	102		101	100	99		98
2	109	104	100	97	107	102	99	96	99	96	94		96	94	92		94
3	104	98	93	89	102	96	92	89	94	90	87		91	88	86		89
4	99	92	87	83	97	91	86	82	89	85	81		87	83	80		85
5	94	87	81	77	93	86	81	77	84	79	76		82	78	75		81
6	90	82	76	72	89	81	76	72	79	75	71		78	74	71		77
7	86	77	72	68	85	77	71	68	75	71	67		74	70	67		73
8	82	73	68	64	81	73	67	64	72	67	63		71	66	63		70
9	79	70	64	60	78	69	64	60	68	63	60		67	63	60		66
10	75	66	61	57	74	66	61	57	65	60	57		64	60	57		63

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	366484
5°	378971
10°	382816
15°	344830
20°	286578
25°	224830
30°	164528
35°	85022
40°	40398
45°	14212
50°	3211
55°	2099
60°	1474
65°	1134
70°	754
75°	522
80°	424
85°	0



TEST NUMBER: P857695

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMDLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	293.5	12.9
10°-20°	746.8	32.9
20°-30°	755.7	33.3
30°-40°	385.2	17.0
40°-50°	75.5	3.3
50°-60°	9.2	0.4
60°-70°	3.8	0.2
70°-80°	1.4	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1796.0	79.1
0°-40°	2181.2	96.0
0°-60°	2265.9	99.8
0°-90°	2271.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2271.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2983	
5°	3073	294
15°	2711	747
25°	1659	756
35°	567	385
45°	82	76
55°	10	9
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P857695

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMDLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2983.1
2.5°	3010.7
5°	3073.0
7.5°	3108.7
10°	3068.7
12.5°	2933.8
15°	2711.2
17.5°	2448.7
20°	2192.0
22.5°	1926.1
25°	1658.6
27.5°	1392.2
30°	1159.8
32.5°	874.0
35°	566.9
37.5°	379.6
40°	251.9
42.5°	158.2
45°	81.8
47.5°	29.2
50°	16.8
52.5°	12.4
55°	9.8
57.5°	7.6
60°	6.0
62.5°	4.9
65°	3.9
67.5°	2.7
70°	2.1
72.5°	1.6
75°	1.1
77.5°	1.1
80°	0.6
82.5°	0.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)