

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857704

Luminaire Tested: **LX4C30D010 EX4C309030 4LBWLI**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857704
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309030 4LBWLI
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBW TRIM WITH LI FINISH, DIM TO WARM
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2722.3 lumens
Efficiency: N/A
Efficacy: 77.8 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct

Input Watts (W): 35
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857704

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBWLI

Luminous Intensity Polar Plot

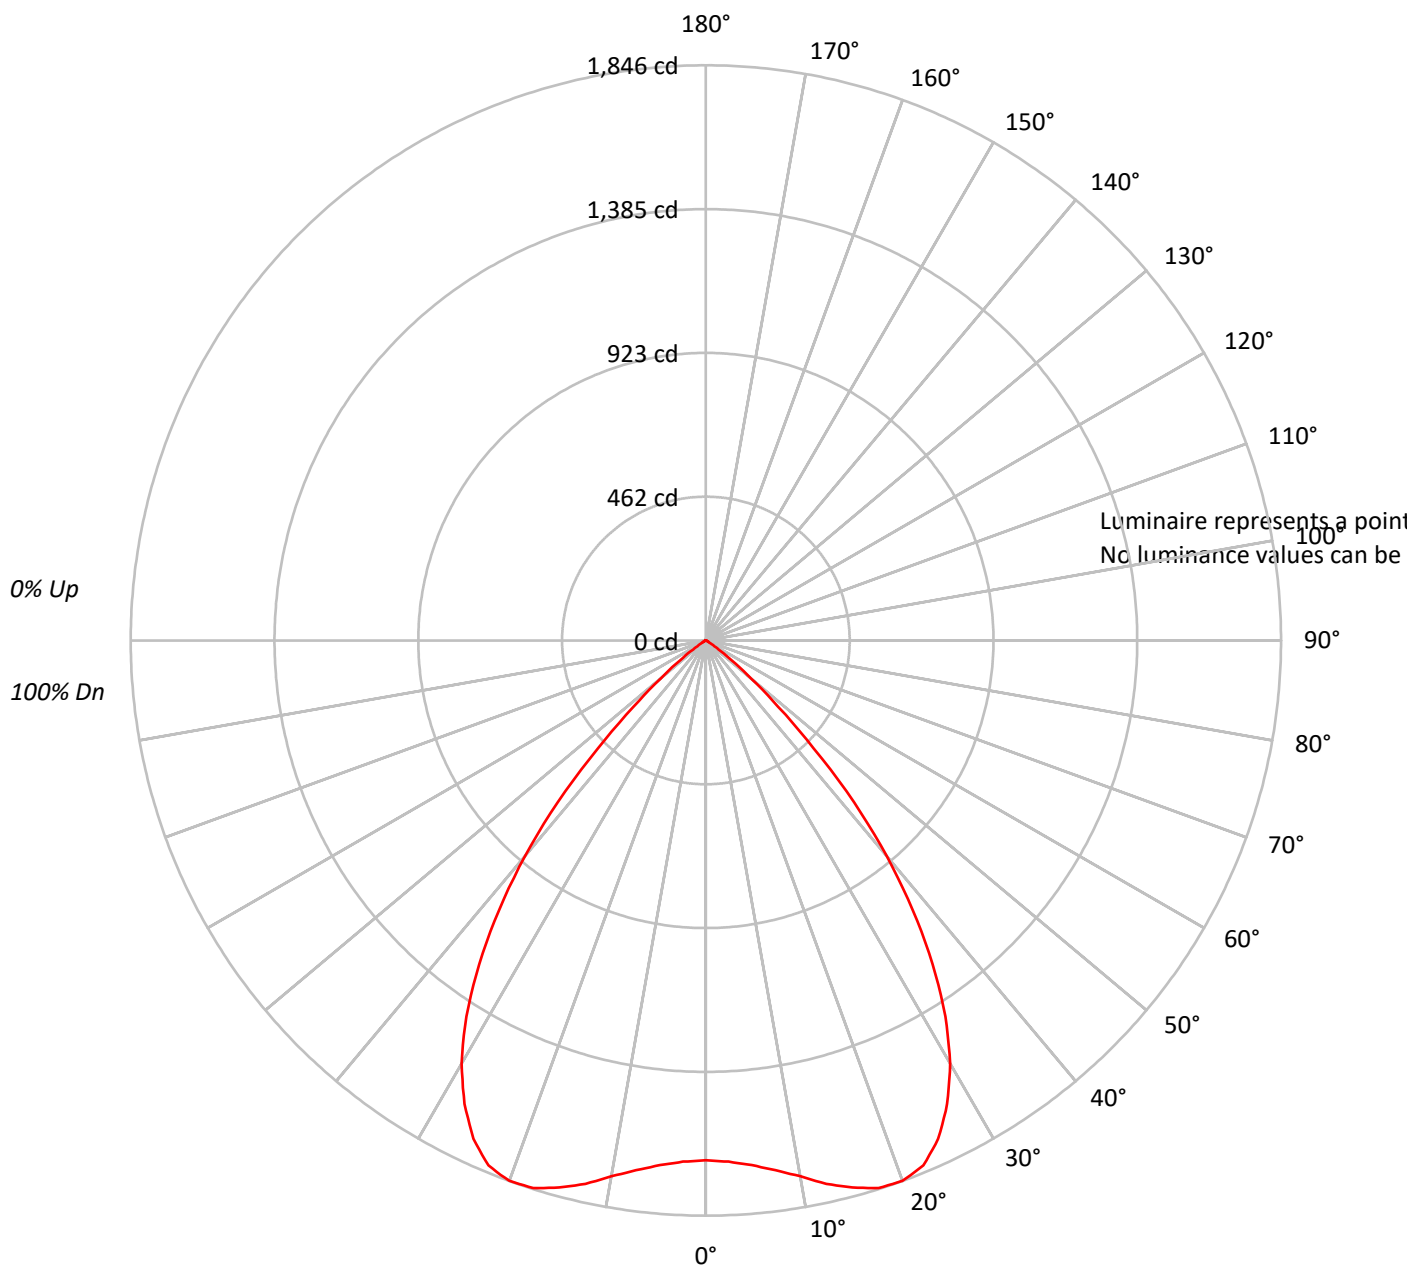



TEST NUMBER: P857704

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBWL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	87	83	98	92	86	82	89	85	81		86	83	80		84
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78
5	88	79	72	68	87	78	72	67	76	71	67		74	70	66		73
6	83	73	66	62	82	72	66	61	71	65	61		69	64	60		68
7	78	68	61	56	77	67	61	56	66	60	56		64	59	55		63
8	74	63	56	52	72	62	56	51	61	55	51		60	55	51		59
9	69	59	52	48	68	58	52	47	57	51	47		56	51	47		55
10	66	55	48	44	65	54	48	44	53	48	44		53	47	44		52

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P857704

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBWLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	163.1	6.0
10°-20°	514.8	18.9
20°-30°	803.0	29.5
30°-40°	781.4	28.7
40°-50°	390.3	14.3
50°-60°	60.4	2.2
60°-70°	7.3	0.3
70°-80°	2.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1480.9	54.4
0°-40°	2262.3	83.1
0°-60°	2712.9	99.7
0°-90°	2722.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2722.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1668	
5°	1690	163
15°	1818	515
25°	1765	803
35°	1269	781
45°	490	390
55°	50	60
65°	6	7
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P857704

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBWLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1667.9
2.5°	1674.2
5°	1689.8
7.5°	1714.8
10°	1745.9
12.5°	1786.4
15°	1817.6
17.5°	1842.7
20°	1845.7
22.5°	1823.9
25°	1764.6
27.5°	1677.3
30°	1568.1
32.5°	1431.2
35°	1269.0
37.5°	1091.2
40°	904.1
42.5°	704.7
45°	489.6
47.5°	314.9
50°	190.1
52.5°	102.8
55°	49.9
57.5°	21.8
60°	12.4
62.5°	9.4
65°	6.3
67.5°	6.3
70°	3.1
72.5°	3.1
75°	3.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)