

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857683

Luminaire Tested: **LX4C30D010 EX4C309030 4LBMH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857683
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C30D010 EX4C309030 4LBMH
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBM TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2032.3 lumens
Efficiency: N/A
Efficacy: 58.1 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 35
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857683

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMH

Luminous Intensity Polar Plot

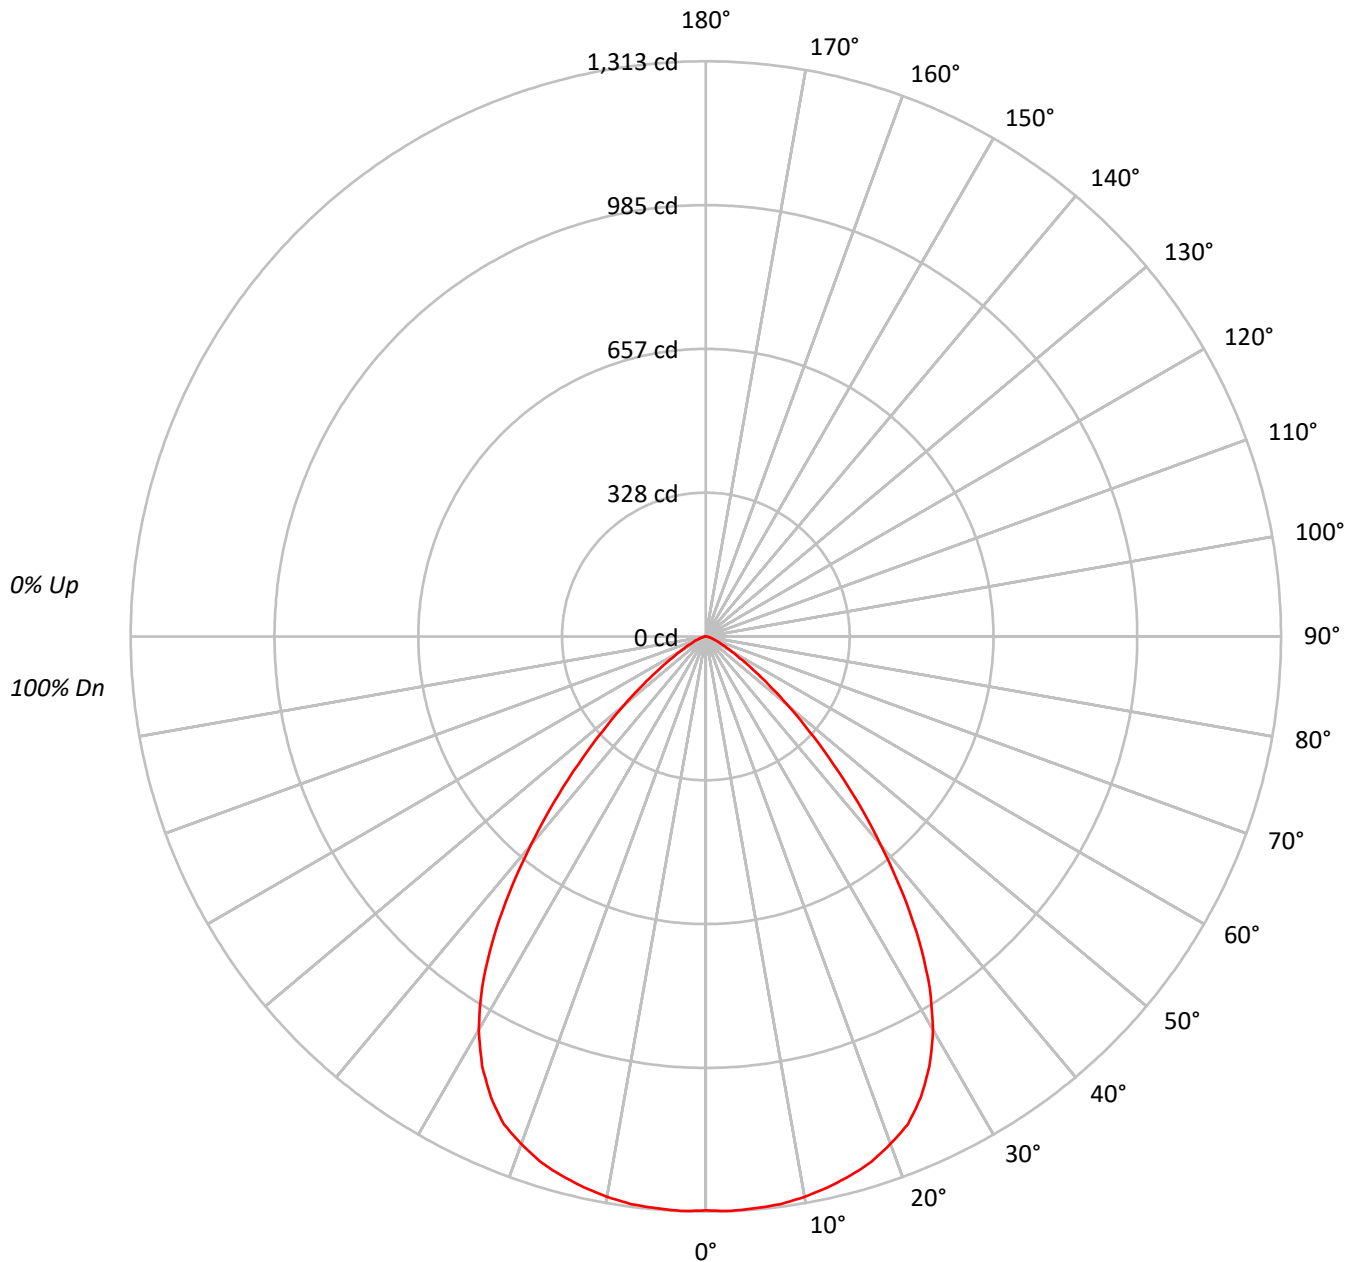



TEST NUMBER: P857683

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	160926
5°	161540
10°	162036
15°	162037
20°	161148
25°	157364
30°	147094
35°	127375
40°	99496
45°	71408
50°	46386
55°	27759
60°	16241
65°	10436
70°	6933
75°	5221
80°	3891
85°	0



TEST NUMBER: P857683

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.7	6.1
10°-20°	359.4	17.7
20°-30°	530.4	26.1
30°-40°	523.4	25.8
40°-50°	320.3	15.8
50°-60°	122.8	6.0
60°-70°	38.4	1.9
70°-80°	11.2	0.6
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1014.6	49.9
0°-40°	1538.0	75.7
0°-60°	1981.1	97.5
0°-90°	2032.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2032.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1310	
5°	1310	125
15°	1274	359
25°	1161	530
35°	849	523
45°	411	320
55°	130	123
65°	36	38
75°	11	11
85°	0	2
90°	0	



TEST NUMBER: P857683

CATALOG NUMBER: LX4C30D010 EX4C309030 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1309.9
2.5°	1312.7
5°	1309.9
7.5°	1307.1
10°	1298.9
12.5°	1287.8
15°	1274.0
17.5°	1257.5
20°	1232.6
22.5°	1205.2
25°	1160.9
27.5°	1105.7
30°	1036.9
32.5°	951.5
35°	849.3
37.5°	736.3
40°	620.4
42.5°	512.9
45°	411.0
47.5°	319.8
50°	242.7
52.5°	179.3
55°	129.6
57.5°	91.0
60°	66.1
62.5°	49.7
65°	35.9
67.5°	27.6
70°	19.3
72.5°	13.8
75°	11.0
77.5°	5.5
80°	5.5
82.5°	2.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)