

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857860

Luminaire Tested: **LX4C35D010 EX4C359840 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P857860
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C35D010 EX4C359840 4LBMLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2946.3 lumens
Efficiency: N/A
Efficacy: 72.9 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857860

CATALOG NUMBER: LX4C35D010 EX4C359840 4LBMLI

Luminous Intensity Polar Plot

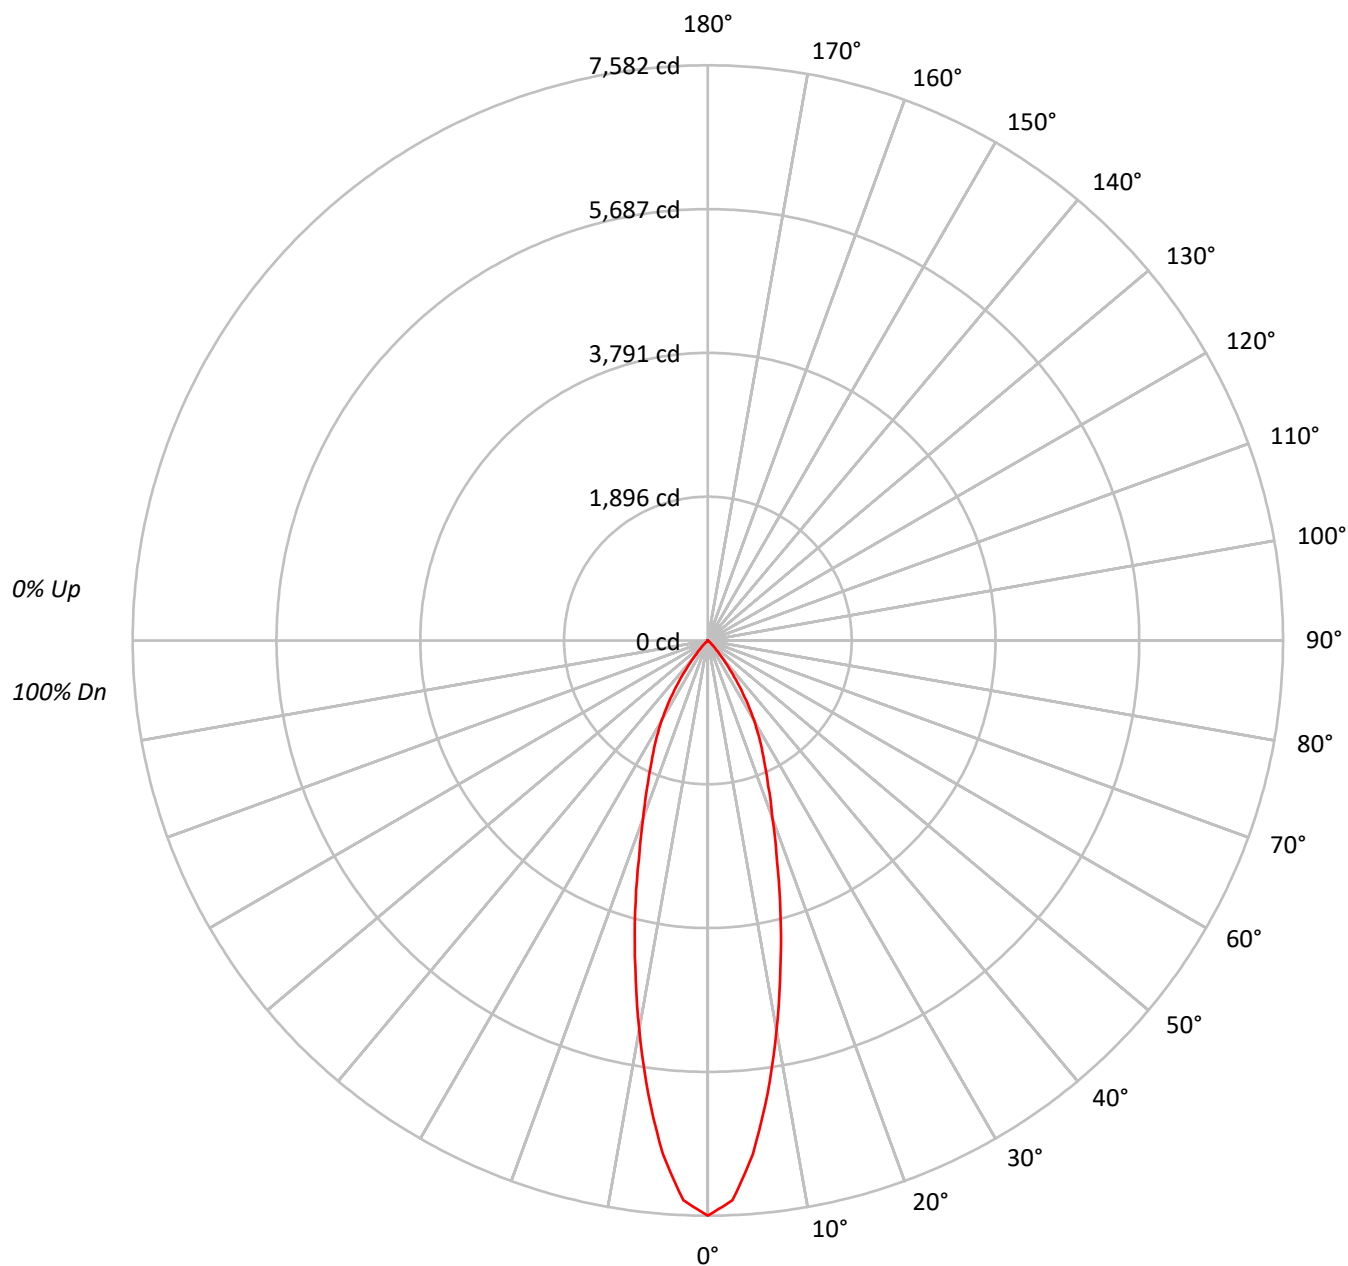



TEST NUMBER: P857860

CATALOG NUMBER: LX4C35D010 EX4C359840 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	109	105	102	99		107	103	100	98		100	98	95		97	95	93		95	93	92
3	105	99	95	92		103	98	94	91		95	92	89		93	90	88		91	89	87
4	101	94	89	86		99	93	88	85		91	87	84		89	86	83		87	84	82
5	96	89	84	80		95	88	84	80		87	82	79		85	81	79		83	80	78
6	92	85	80	76		91	84	79	76		83	78	75		81	78	75		80	77	74
7	89	81	76	72		88	80	75	72		79	75	71		78	74	71		77	73	71
8	85	77	72	68		84	77	72	68		76	71	68		75	71	68		74	70	67
9	82	74	69	65		81	73	68	65		72	68	65		72	68	65		71	67	64
10	79	71	66	62		78	70	65	62		69	65	62		69	65	62		68	64	62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	931487
5°	838237
10°	649816
15°	470339
20°	325668
25°	237423
30°	172515
35°	102089
40°	42932
45°	13378
50°	1739
55°	964
60°	1106
65°	1308
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P857860

CATALOG NUMBER: LX4C35D010 EX4C359840 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	597.5	20.3
10°-20°	1022.9	34.7
20°-30°	813.0	27.6
30°-40°	430.4	14.6
40°-50°	74.1	2.5
50°-60°	5.5	0.2
60°-70°	2.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2433.5	82.6
0°-40°	2863.9	97.2
0°-60°	2943.5	99.9
0°-90°	2946.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2946.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7582	
5°	6797	598
15°	3698	1023
25°	1752	813
35°	681	430
45°	77	74
55°	4	6
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857860

CATALOG NUMBER: LX4C35D010 EX4C359840 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	7582.1
2.5°	7386.9
5°	6797.1
7.5°	6025.9
10°	5209.0
12.5°	4419.6
15°	3698.0
17.5°	3026.5
20°	2491.0
22.5°	2082.7
25°	1751.5
27.5°	1483.8
30°	1216.1
32.5°	943.8
35°	680.7
37.5°	449.3
40°	267.7
42.5°	154.3
45°	77.0
47.5°	27.3
50°	9.1
52.5°	9.1
55°	4.5
57.5°	4.5
60°	4.5
62.5°	4.5
65°	4.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)