

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857900

Luminaire Tested: **LX4C40D010 EX4C409027 4LBWH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857900
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C40D010 EX4C409027 4LBWH
Description: 4 INCH 4000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBW TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3236.0 lumens
Efficiency: N/A
Efficacy: 68.9 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857900

CATALOG NUMBER: LX4C40D010 EX4C409027 4LBWH

Luminous Intensity Polar Plot

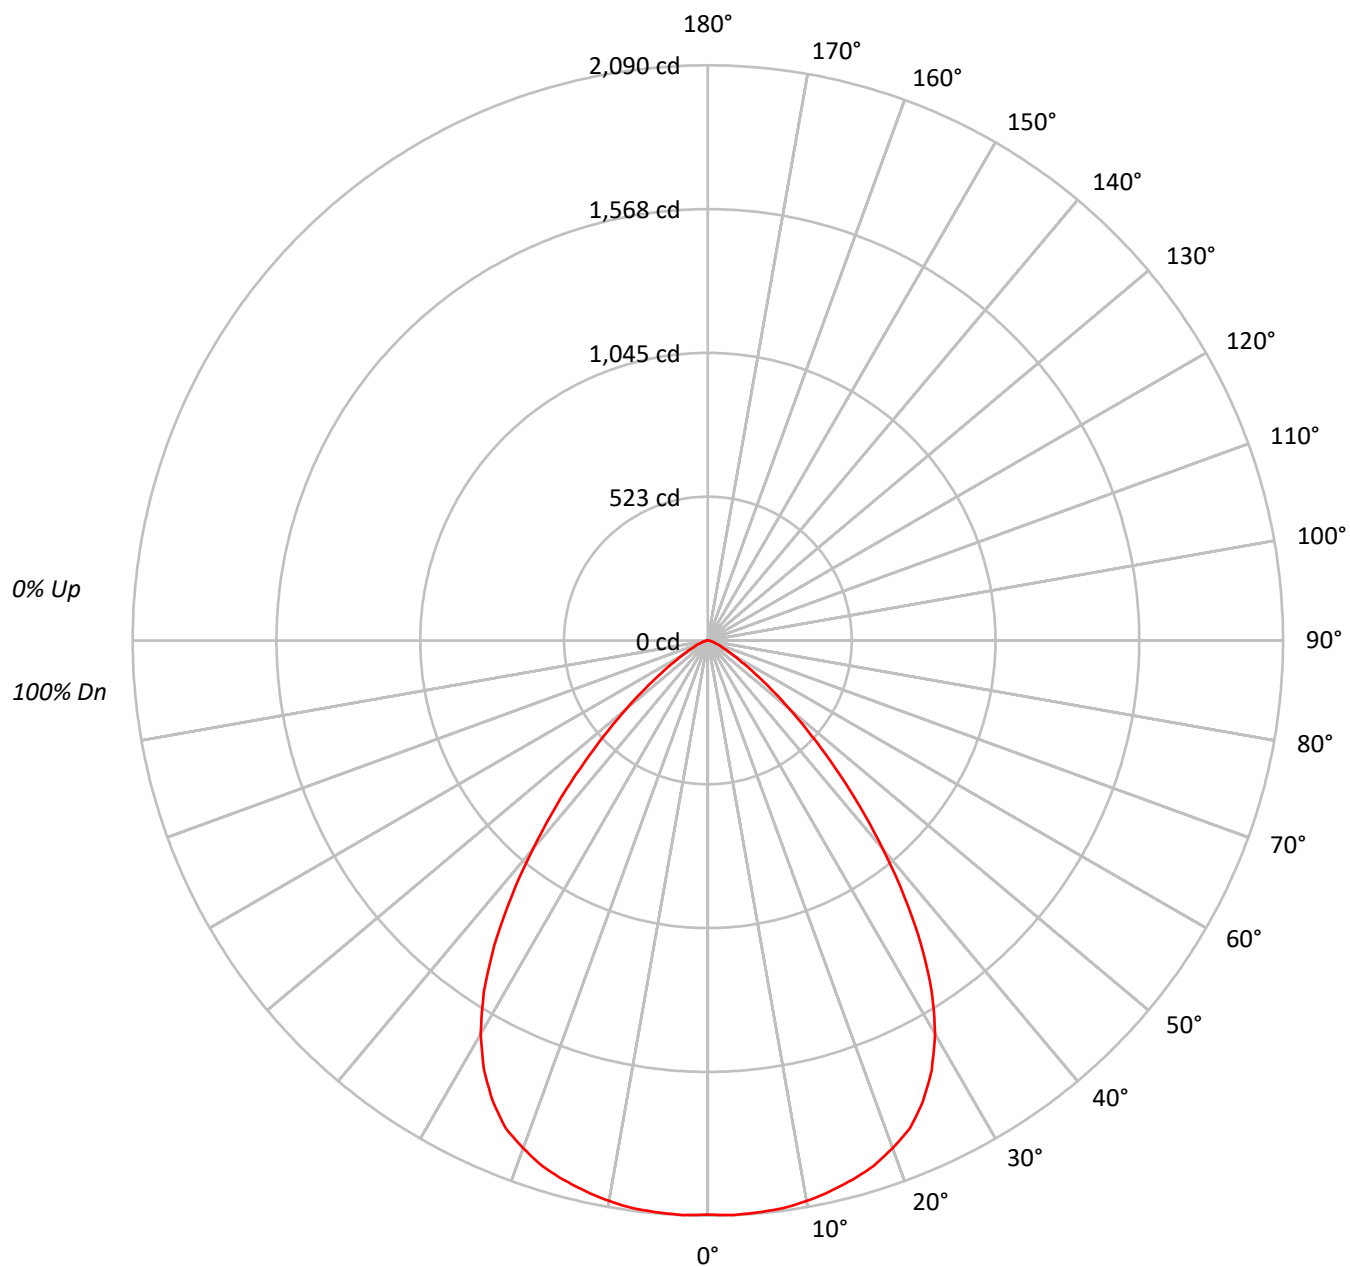



TEST NUMBER: P857900

CATALOG NUMBER: LX4C40D010 EX4C409027 4LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91		
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82		
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74		
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67		
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61		
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55		
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50		
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46		
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43		
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	256248
5°	257227
10°	258005
15°	258025
20°	256599
25°	250585
30°	234223
35°	202828
40°	158449
45°	113679
50°	73851
55°	44209
60°	25873
65°	16599
70°	11063
75°	8354
80°	6226
85°	0



TEST NUMBER: P857900

CATALOG NUMBER: LX4C40D010 EX4C409027 4LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	198.6	6.1
10°-20°	572.3	17.7
20°-30°	844.6	26.1
30°-40°	833.5	25.8
40°-50°	510.0	15.8
50°-60°	195.5	6.0
60°-70°	61.1	1.9
70°-80°	17.9	0.6
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1615.5	49.9
0°-40°	2449.0	75.7
0°-60°	3154.6	97.5
0°-90°	3236.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3236.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2086	
5°	2086	199
15°	2029	572
25°	1849	845
35°	1352	833
45°	654	510
55°	206	196
65°	57	61
75°	18	18
85°	0	2
90°	0	



TEST NUMBER: P857900

CATALOG NUMBER: LX4C40D010 EX4C409027 4LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	2085.8
2.5°	2090.2
5°	2085.8
7.5°	2081.4
10°	2068.2
12.5°	2050.6
15°	2028.7
17.5°	2002.3
20°	1962.7
22.5°	1919.0
25°	1848.6
27.5°	1760.7
30°	1651.1
32.5°	1515.0
35°	1352.4
37.5°	1172.4
40°	988.0
42.5°	816.7
45°	654.3
47.5°	509.3
50°	386.4
52.5°	285.5
55°	206.4
57.5°	144.8
60°	105.3
62.5°	79.1
65°	57.1
67.5°	44.0
70°	30.8
72.5°	22.0
75°	17.6
77.5°	8.8
80°	8.8
82.5°	4.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)