

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857937

Luminaire Tested: **LX4C40D010 EX4C409035 4LBNH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857937
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C40D010 EX4C409035 4LBNH
Description: 4 INCH 4000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS
AND 4LBN TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2550.0 lumens
Efficiency: N/A
Efficacy: 54.3 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857937

CATALOG NUMBER: LX4C40D010 EX4C409035 4LBNH

Luminous Intensity Polar Plot

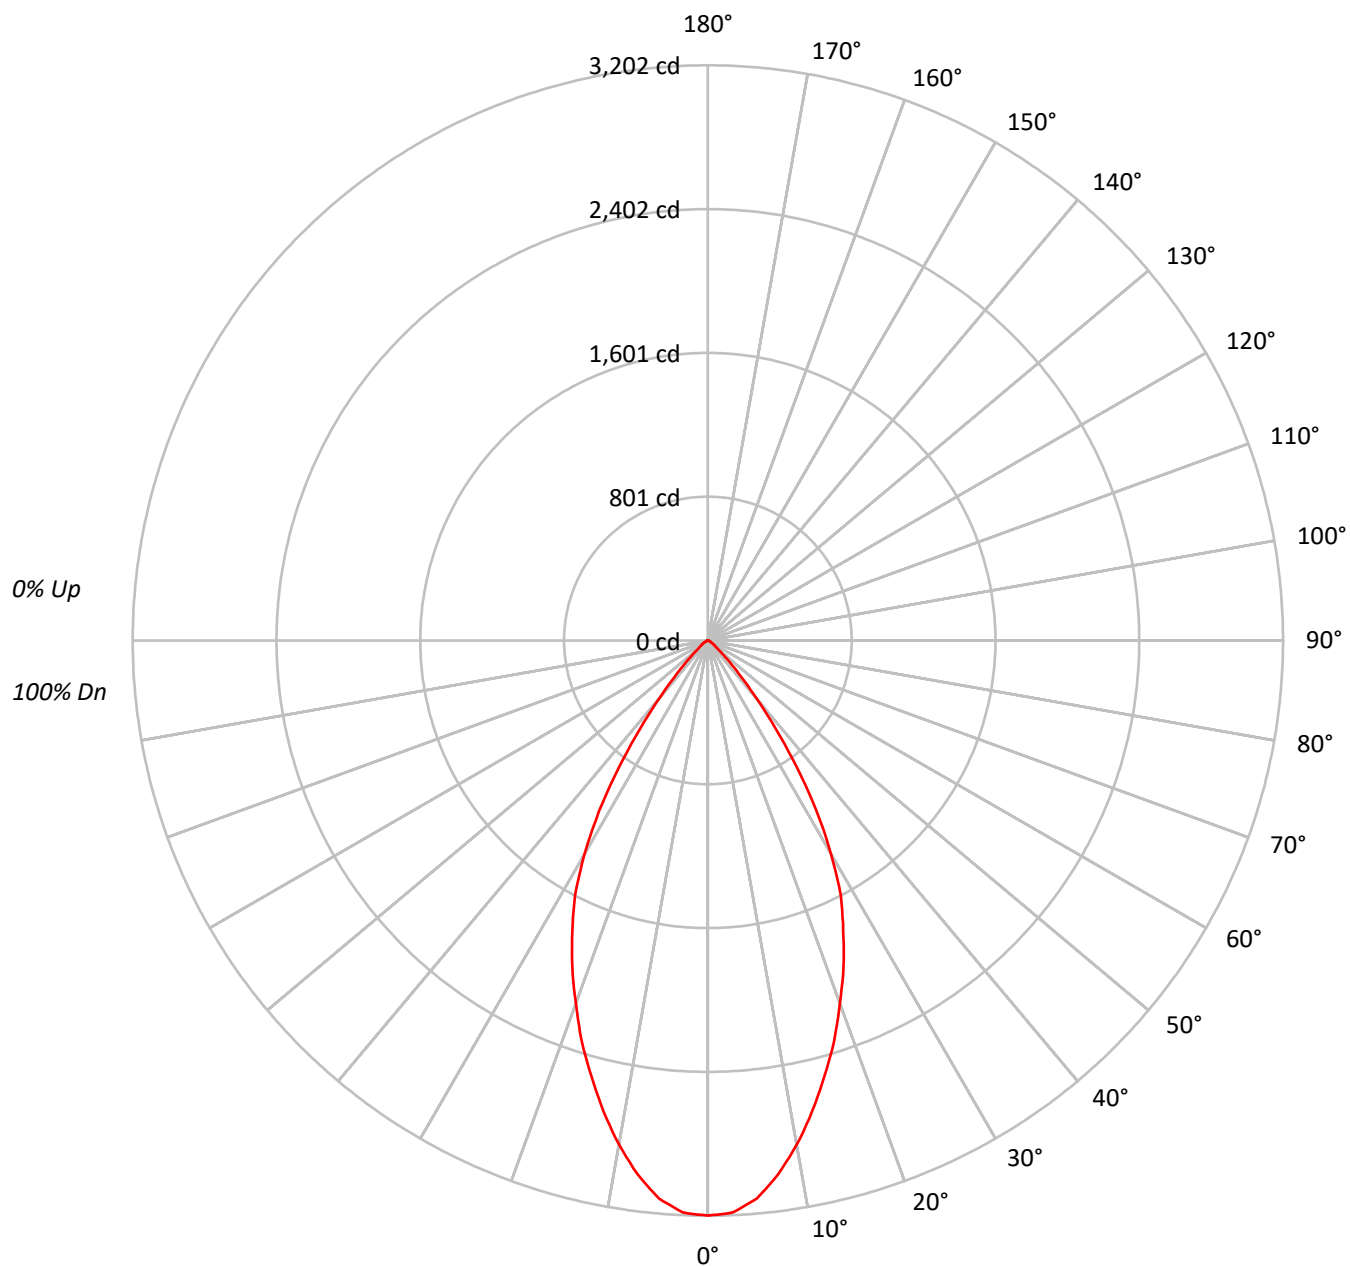



TEST NUMBER: P857937

CATALOG NUMBER: LX4C40D010 EX4C409035 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	94	98	95	92		95	93	90		92
3	102	96	91	87	100	95	90	86	92	88	85		90	86	84		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		83
5	92	84	78	74	91	83	78	73	81	76	73		80	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	83	74	68	64	82	73	68	64	72	67	63		71	66	63		70
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66
9	76	66	60	56	74	65	60	56	65	59	56		64	59	56		63
10	72	62	57	53	71	62	56	53	61	56	53		60	56	52		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	393328
5°	384582
10°	355584
15°	319062
20°	280864
25°	241720
30°	194645
35°	129580
40°	67405
45°	30509
50°	13245
55°	8889
60°	5700
65°	4041
70°	3341
75°	2183
80°	0
85°	0



TEST NUMBER: P857937

CATALOG NUMBER: LX4C40D010 EX4C409035 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	288.9	11.3
10°-20°	700.7	27.5
20°-30°	813.5	31.9
30°-40°	538.7	21.1
40°-50°	151.1	5.9
50°-60°	38.0	1.5
60°-70°	14.3	0.6
70°-80°	4.9	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1803.0	70.7
0°-40°	2341.8	91.8
0°-60°	2530.8	99.2
0°-90°	2550.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2550.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3202	
5°	3118	289
15°	2509	701
25°	1783	813
35°	864	539
45°	176	151
55°	42	38
65°	14	14
75°	5	5
85°	0	0
90°	0	



TEST NUMBER: P857937

CATALOG NUMBER: LX4C40D010 EX4C409035 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	3201.6
2.5°	3187.7
5°	3118.5
7.5°	2998.2
10°	2850.4
12.5°	2684.0
15°	2508.6
17.5°	2337.6
20°	2148.3
22.5°	1972.7
25°	1783.2
27.5°	1603.1
30°	1372.1
32.5°	1127.2
35°	864.0
37.5°	619.1
40°	420.3
42.5°	272.5
45°	175.6
47.5°	106.3
50°	69.3
52.5°	50.7
55°	41.5
57.5°	32.4
60°	23.2
62.5°	18.5
65°	13.9
67.5°	9.3
70°	9.3
72.5°	4.6
75°	4.6
77.5°	4.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)