

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857996

Luminaire Tested: **LX4C40D010 EX4C409827 4LBMH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857996
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C40D010 EX4C409827 4LBMH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2595.8 lumens
Efficiency: N/A
Efficacy: 55.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857996

CATALOG NUMBER: LX4C40D010 EX4C409827 4LBMH

Luminous Intensity Polar Plot

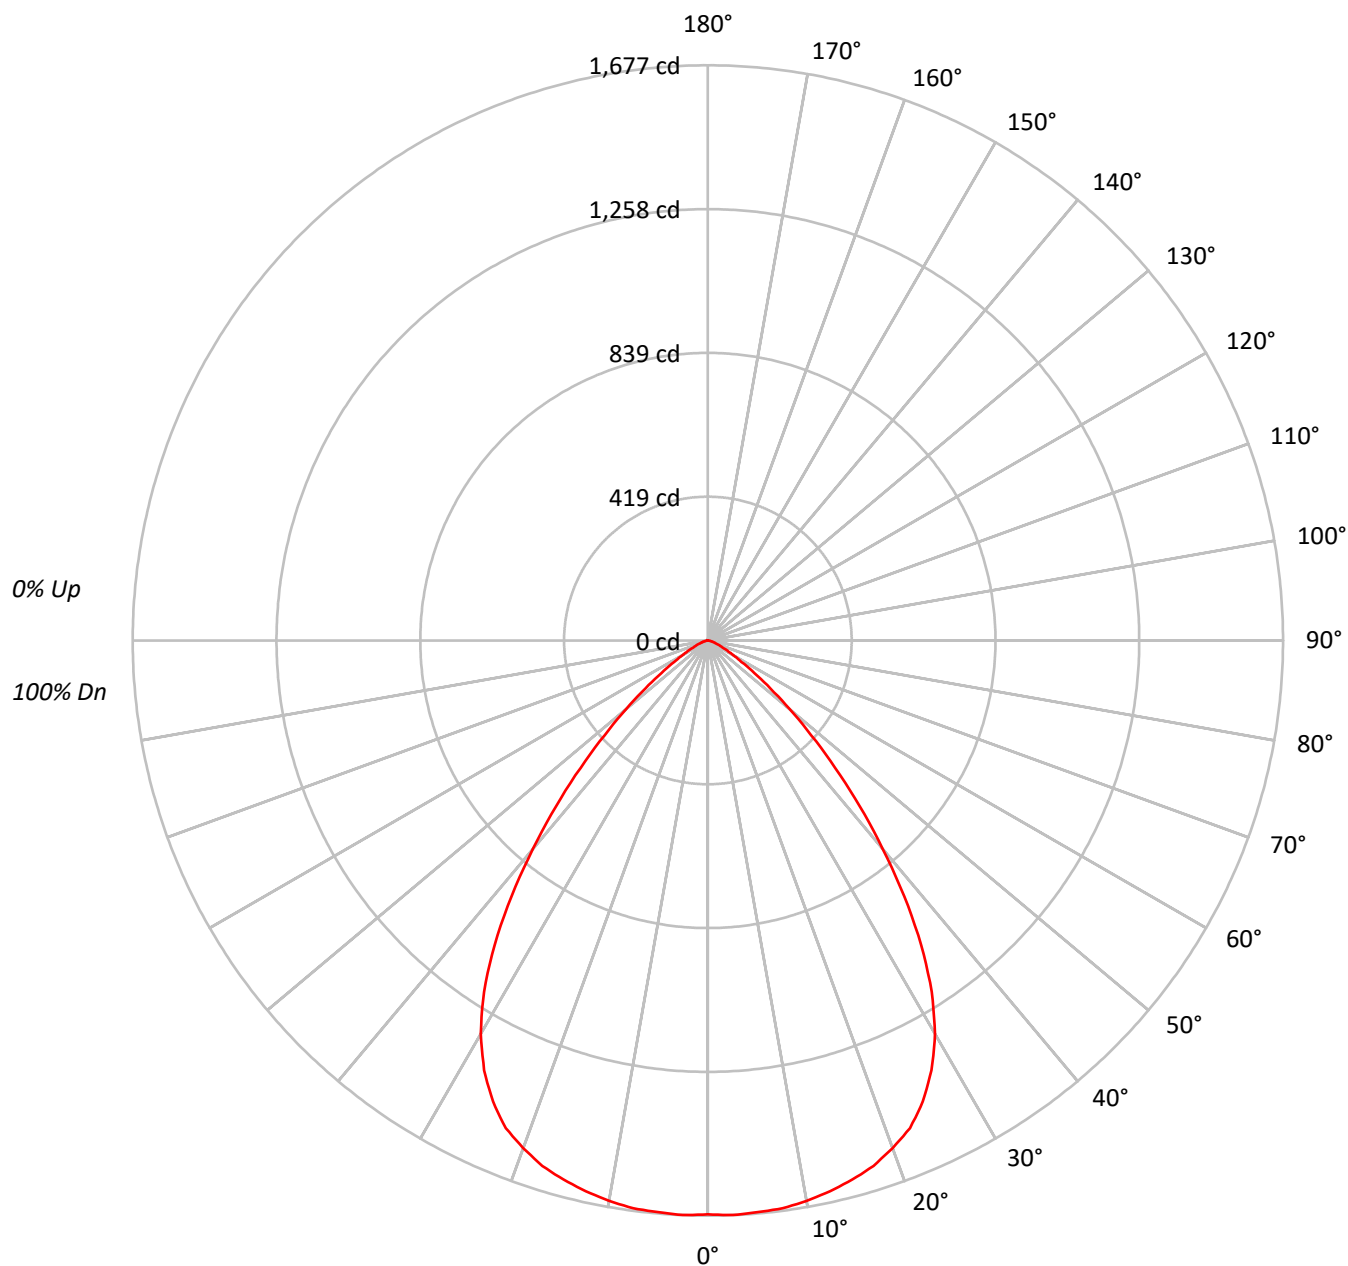



TEST NUMBER: P857996

CATALOG NUMBER: LX4C40D010 EX4C409827 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	205558
5°	206344
10°	206971
15°	206972
20°	205847
25°	201026
30°	187878
35°	162694
40°	127096
45°	91197
50°	59249
55°	35470
60°	20738
65°	13314
70°	8872
75°	6693
80°	4952
85°	0



TEST NUMBER: P857996

CATALOG NUMBER: LX4C40D010 EX4C409827 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.3	6.1
10°-20°	459.1	17.7
20°-30°	677.5	26.1
30°-40°	668.6	25.8
40°-50°	409.2	15.8
50°-60°	156.9	6.0
60°-70°	49.0	1.9
70°-80°	14.4	0.6
80°-90°	1.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1295.9	49.9
0°-40°	1964.5	75.7
0°-60°	2530.5	97.5
0°-90°	2595.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2595.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1673	
5°	1673	159
15°	1627	459
25°	1483	677
35°	1085	669
45°	525	409
55°	166	157
65°	46	49
75°	14	14
85°	0	2
90°	0	



TEST NUMBER: P857996

CATALOG NUMBER: LX4C40D010 EX4C409827 4LBMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1673.2
2.5°	1676.7
5°	1673.2
7.5°	1669.7
10°	1659.1
12.5°	1645.0
15°	1627.3
17.5°	1606.2
20°	1574.5
22.5°	1539.3
25°	1483.0
27.5°	1412.4
30°	1324.4
32.5°	1215.3
35°	1084.8
37.5°	940.4
40°	792.5
42.5°	655.2
45°	524.9
47.5°	408.5
50°	310.0
52.5°	229.0
55°	165.6
57.5°	116.2
60°	84.4
62.5°	63.5
65°	45.8
67.5°	35.2
70°	24.7
72.5°	17.7
75°	14.1
77.5°	7.0
80°	7.0
82.5°	3.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)