

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858049

Luminaire Tested: **LX4C40D010 EX4C409850 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P858049
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C40D010 EX4C409850 4LBMLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3489.4 lumens
Efficiency: N/A
Efficacy: 74.2 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858049

CATALOG NUMBER: LX4C40D010 EX4C409850 4LBMLI

Luminous Intensity Polar Plot

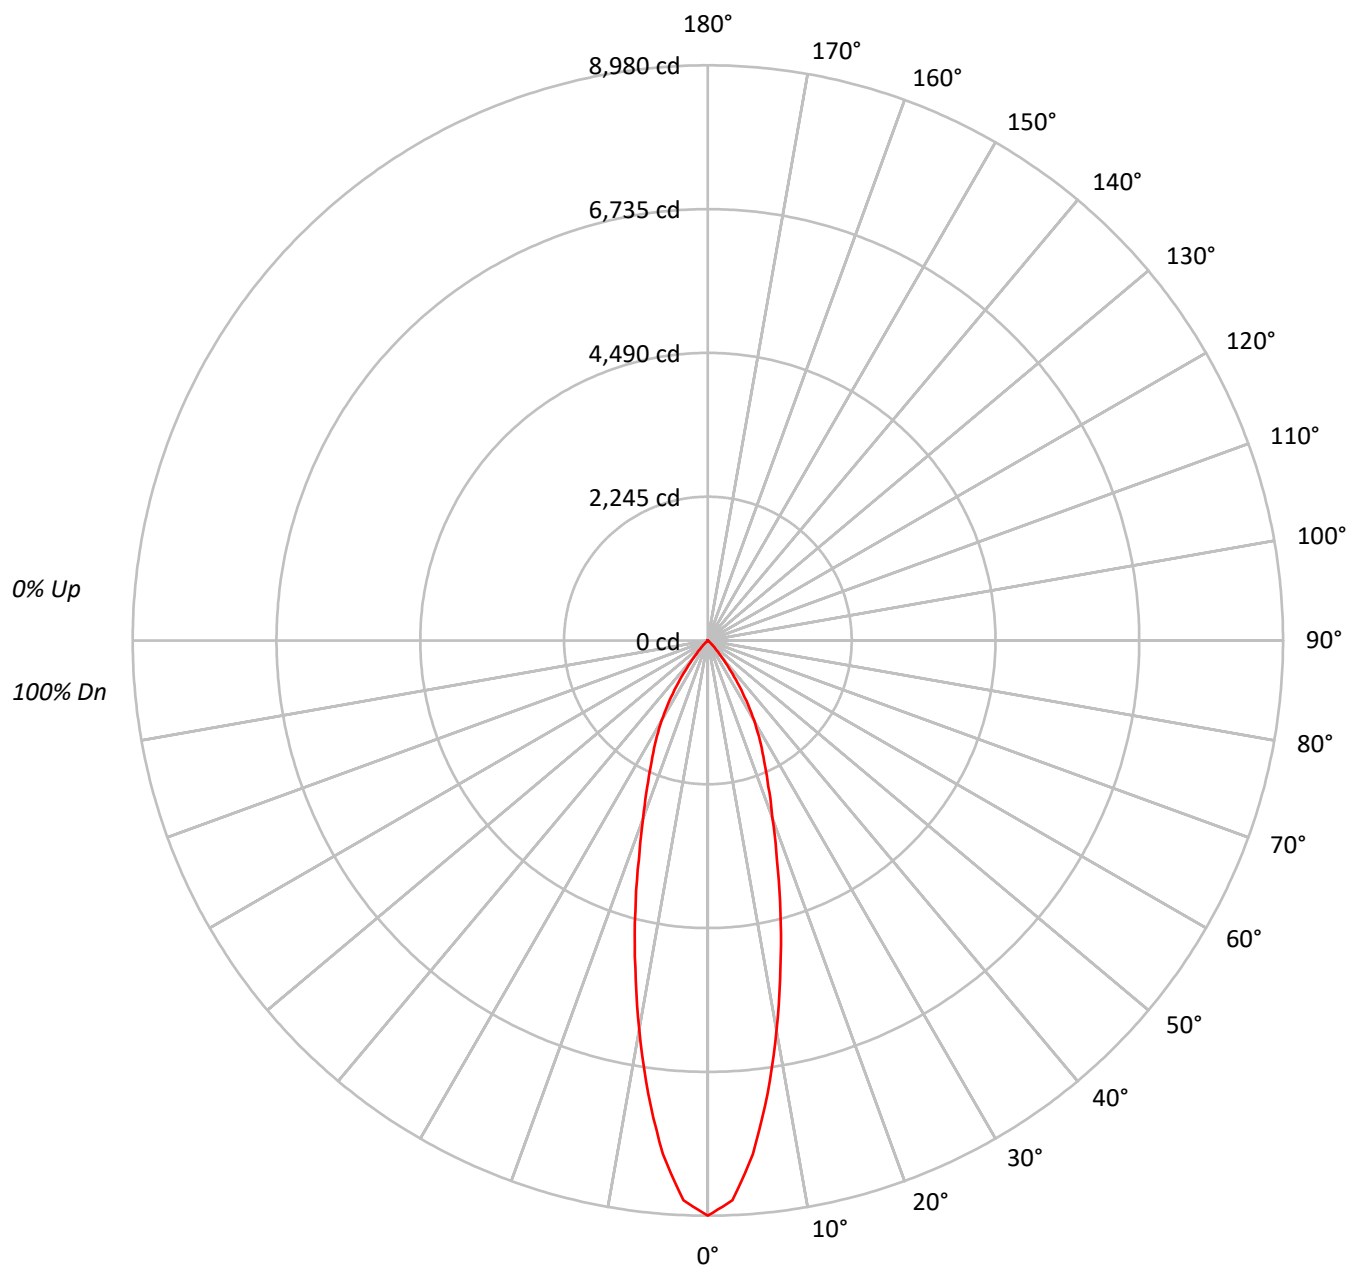



TEST NUMBER: P858049

CATALOG NUMBER: LX4C40D010 EX4C409850 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	92	103	98	94	91	95	92	89		93	90	88		91
4	101	94	89	86	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	84	80	87	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	78	75		80
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77
8	85	77	72	68	84	77	72	68	76	71	68		75	71	68		74
9	82	74	69	65	81	73	68	65	72	68	65		72	68	65		71
10	79	71	66	62	78	70	65	62	69	65	62		69	65	62		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1103187
5°	992748
10°	769600
15°	557029
20°	385690
25°	281193
30°	204319
35°	120896
40°	50855
45°	15845
50°	2064
55°	1157
60°	1327
65°	1570
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P858049

CATALOG NUMBER: LX4C40D010 EX4C409850 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	707.7	20.3
10°-20°	1211.5	34.7
20°-30°	962.9	27.6
30°-40°	509.7	14.6
40°-50°	87.8	2.5
50°-60°	6.6	0.2
60°-70°	3.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2882.0	82.6
0°-40°	3391.7	97.2
0°-60°	3486.1	99.9
0°-90°	3489.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3489.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8980	
5°	8050	708
15°	4380	1211
25°	2074	963
35°	806	510
45°	91	88
55°	5	7
65°	5	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P858049

CATALOG NUMBER: LX4C40D010 EX4C409850 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	8979.7
2.5°	8748.5
5°	8050.0
7.5°	7136.5
10°	6169.2
12.5°	5234.2
15°	4379.6
17.5°	3584.3
20°	2950.1
22.5°	2466.5
25°	2074.4
27.5°	1757.3
30°	1440.3
32.5°	1117.8
35°	806.1
37.5°	532.1
40°	317.1
42.5°	182.7
45°	91.2
47.5°	32.3
50°	10.8
52.5°	10.8
55°	5.4
57.5°	5.4
60°	5.4
62.5°	5.4
65°	5.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)