

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858600

Luminaire Tested: **LD4C25W2N2765D010 4LBWH\_6500K**

Issue Date: 11/9/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P858600  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 11/9/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C25W2N2765D010 4LBWH\_6500K  
Description: 4 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 6500K, W2N2765 LEDS  
AND 4LBWH TRIM WITH FINISH

Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2267.1 lumens  
Efficiency: N/A  
Efficacy: 67.7 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 33.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858600

CATALOG NUMBER: LD4C25W2N2765D010 4LBWH\_6500K

### Luminous Intensity Polar Plot

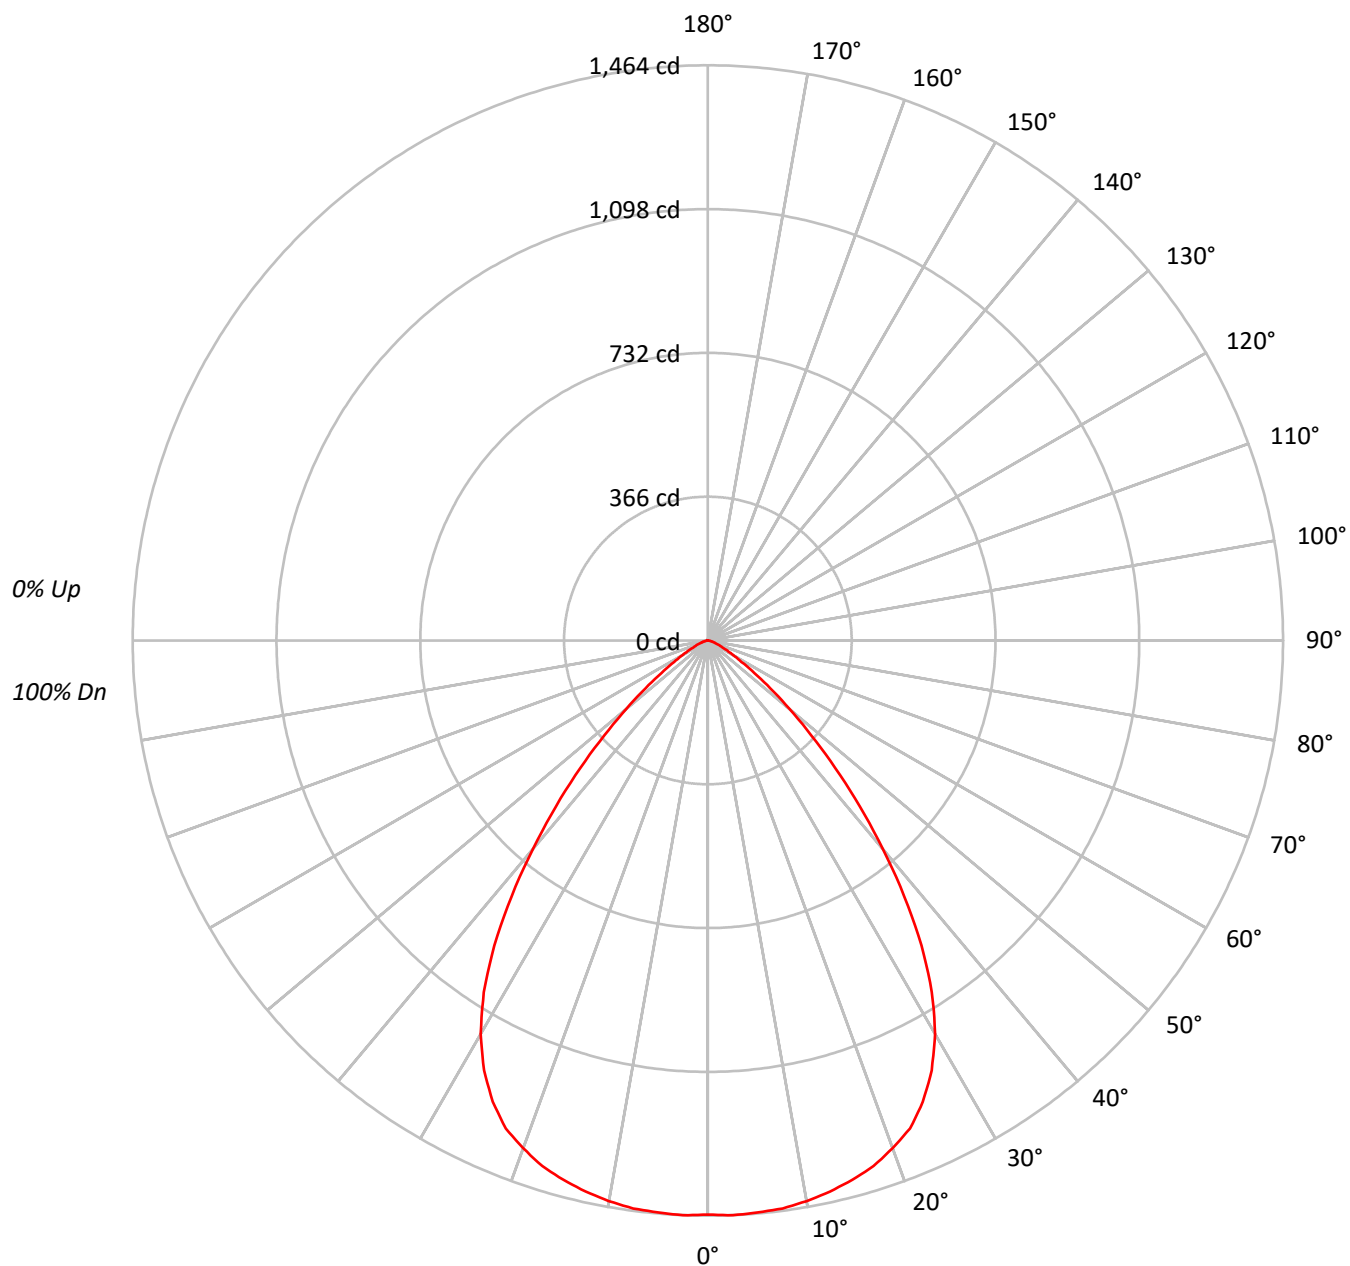



TEST NUMBER: P858600

CATALOG NUMBER: LD4C25W2N2765D010 4LBWH\_6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 |  | 103 | 101 | 99  |  | 99  | 97  | 96  |  | 96  | 94  | 93  |
| 2   | 105 | 100 | 95  | 91  | 103 | 98  | 93  | 90  |  | 95  | 91  | 88  |  | 91  | 88  | 86  |  | 89  | 86  | 84  |
| 3   | 99  | 91  | 85  | 80  | 97  | 90  | 84  | 80  |  | 87  | 82  | 78  |  | 84  | 80  | 77  |  | 82  | 79  | 76  |
| 4   | 92  | 83  | 77  | 72  | 90  | 82  | 76  | 71  |  | 80  | 75  | 70  |  | 78  | 73  | 70  |  | 76  | 72  | 69  |
| 5   | 87  | 77  | 70  | 65  | 85  | 76  | 69  | 64  |  | 74  | 68  | 64  |  | 72  | 67  | 63  |  | 70  | 66  | 62  |
| 6   | 81  | 71  | 64  | 58  | 80  | 70  | 63  | 58  |  | 68  | 62  | 58  |  | 67  | 61  | 57  |  | 65  | 61  | 57  |
| 7   | 76  | 65  | 58  | 53  | 75  | 65  | 58  | 53  |  | 63  | 57  | 53  |  | 62  | 56  | 52  |  | 61  | 56  | 52  |
| 8   | 72  | 60  | 53  | 49  | 70  | 60  | 53  | 49  |  | 59  | 53  | 48  |  | 58  | 52  | 48  |  | 57  | 52  | 48  |
| 9   | 68  | 56  | 49  | 45  | 66  | 56  | 49  | 45  |  | 55  | 49  | 44  |  | 54  | 48  | 44  |  | 53  | 48  | 44  |
| 10  | 64  | 52  | 46  | 41  | 63  | 52  | 46  | 41  |  | 51  | 45  | 41  |  | 50  | 45  | 41  |  | 49  | 44  | 41  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 179513 |
| 5°  | 180199 |
| 10° | 180748 |
| 15° | 180759 |
| 20° | 179765 |
| 25° | 175556 |
| 30° | 164088 |
| 35° | 142088 |
| 40° | 110995 |
| 45° | 79643  |
| 50° | 51738  |
| 55° | 30972  |
| 60° | 18133  |
| 65° | 11628  |
| 70° | 7759   |
| 75° | 5838   |
| 80° | 4386   |
| 85° | 0      |



TEST NUMBER: P858600

CATALOG NUMBER: LD4C25W2N2765D010 4LBWH\_6500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 139.1  | 6.1       |
| 10°-20°   | 401.0  | 17.7      |
| 20°-30°   | 591.7  | 26.1      |
| 30°-40°   | 583.9  | 25.8      |
| 40°-50°   | 357.3  | 15.8      |
| 50°-60°   | 137.0  | 6.0       |
| 60°-70°   | 42.8   | 1.9       |
| 70°-80°   | 12.6   | 0.6       |
| 80°-90°   | 1.7    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1131.8 | 49.9      |
| 0°-40°    | 1715.6 | 75.7      |
| 0°-60°    | 2210.0 | 97.5      |
| 0°-90°    | 2267.1 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2267.1 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1461 |      |
| 5°  | 1461 | 139  |
| 15° | 1421 | 401  |
| 25° | 1295 | 592  |
| 35° | 947  | 584  |
| 45° | 458  | 357  |
| 55° | 145  | 137  |
| 65° | 40   | 43   |
| 75° | 12   | 13   |
| 85° | 0    | 2    |
| 90° | 0    |      |



TEST NUMBER: P858600

CATALOG NUMBER: LD4C25W2N2765D010 4LBWH\_6500K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1461.2 |
| 2.5°  | 1464.3 |
| 5°    | 1461.2 |
| 7.5°  | 1458.1 |
| 10°   | 1448.9 |
| 12.5° | 1436.6 |
| 15°   | 1421.2 |
| 17.5° | 1402.7 |
| 20°   | 1375.0 |
| 22.5° | 1344.3 |
| 25°   | 1295.1 |
| 27.5° | 1233.5 |
| 30°   | 1156.7 |
| 32.5° | 1061.3 |
| 35°   | 947.4  |
| 37.5° | 821.3  |
| 40°   | 692.1  |
| 42.5° | 572.2  |
| 45°   | 458.4  |
| 47.5° | 356.8  |
| 50°   | 270.7  |
| 52.5° | 200.0  |
| 55°   | 144.6  |
| 57.5° | 101.5  |
| 60°   | 73.8   |
| 62.5° | 55.4   |
| 65°   | 40.0   |
| 67.5° | 30.8   |
| 70°   | 21.6   |
| 72.5° | 15.4   |
| 75°   | 12.3   |
| 77.5° | 6.2    |
| 80°   | 6.2    |
| 82.5° | 3.1    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)