

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858683

Luminaire Tested: **LD4C30W2N2765D010 4LBWH_5000K**

Issue Date: 11/9/2023



Test Information

Test Method: LM-79-08
Report Number: P858683
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER-P3
Issue Date: 11/9/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C30W2N2765D010 4LBWH_5000K
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, W2N2765 LEDS
AND 4LBWH TRIM WITH FINISH

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2837.0 lumens
Efficiency: N/A
Efficacy: 71.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 39.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858683

CATALOG NUMBER: LD4C30W2N2765D010 4LBWH_5000K

Luminous Intensity Polar Plot

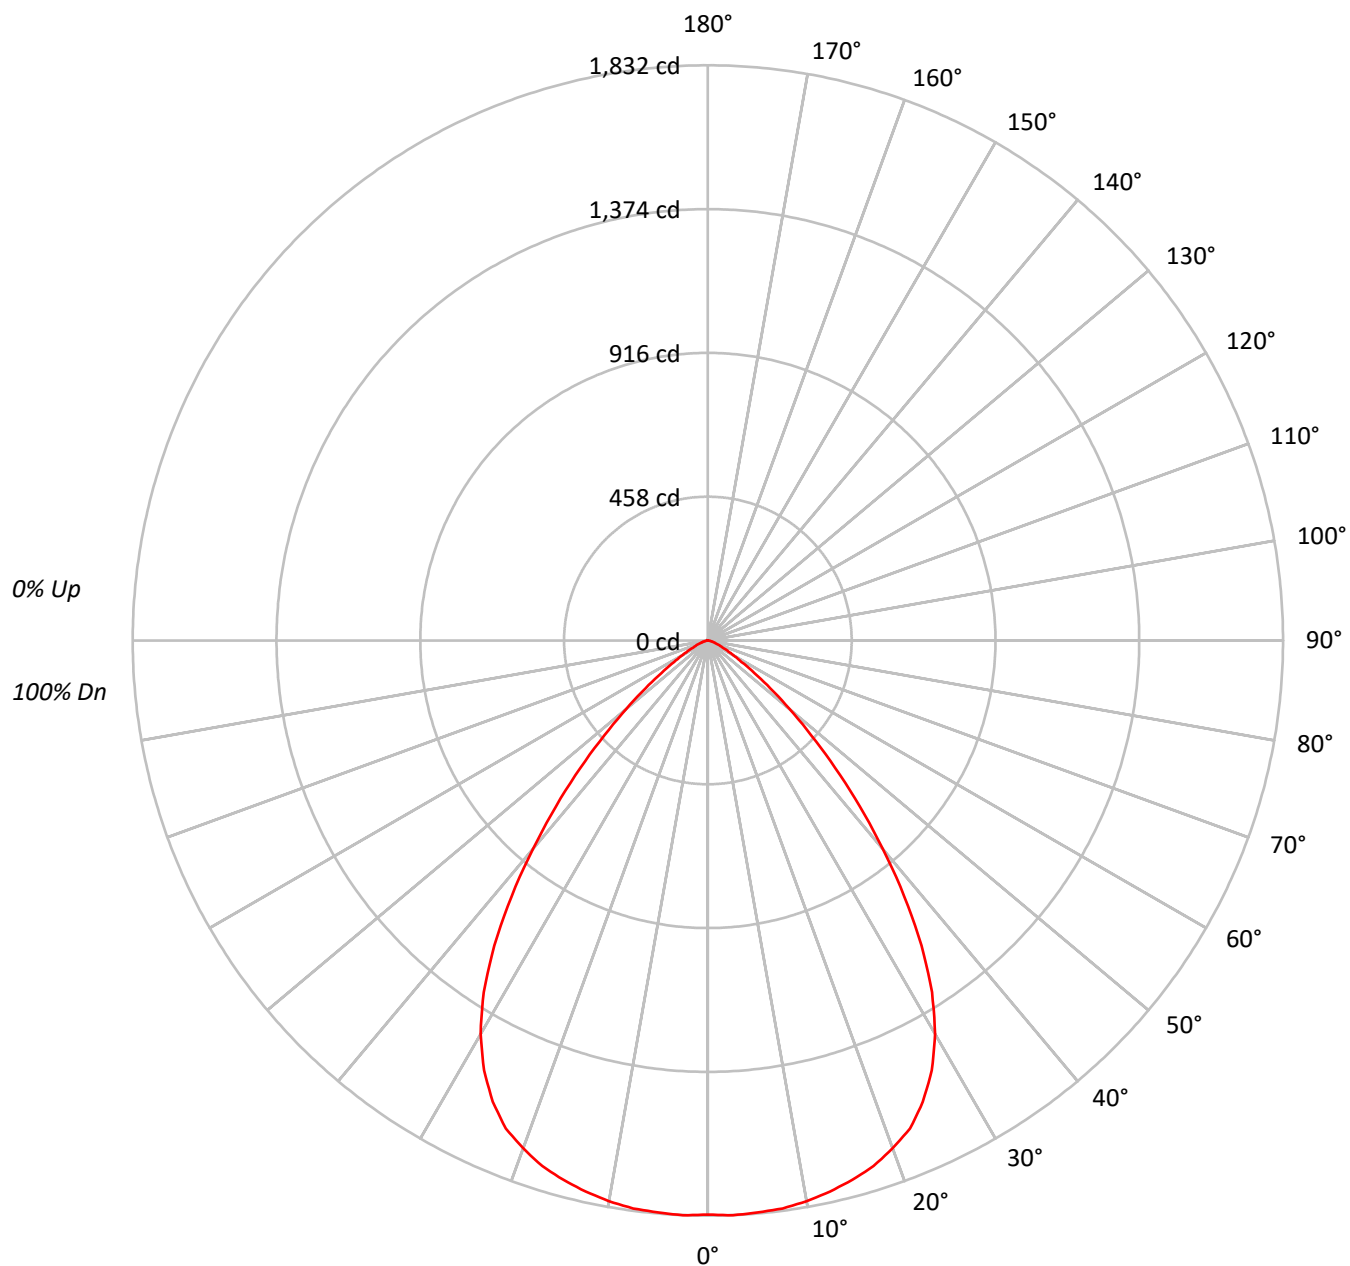



TEST NUMBER: P858683

CATALOG NUMBER: LD4C30W2N2765D010 4LBWH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	224650
5°	225508
10°	226194
15°	226203
20°	224961
25°	219692
30°	205341
35°	177812
40°	138900
45°	99658
50°	64734
55°	38747
60°	22679
65°	14564
70°	9698
75°	7310
80°	5448
85°	0



TEST NUMBER: P858683

CATALOG NUMBER: LD4C30W2N2765D010 4LBWH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.1	6.1
10°-20°	501.8	17.7
20°-30°	740.4	26.1
30°-40°	730.7	25.8
40°-50°	447.1	15.8
50°-60°	171.4	6.0
60°-70°	53.6	1.9
70°-80°	15.7	0.6
80°-90°	2.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1416.3	49.9
0°-40°	2147.0	75.7
0°-60°	2765.6	97.5
0°-90°	2837.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2837.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1829	
5°	1829	174
15°	1778	502
25°	1621	740
35°	1186	731
45°	574	447
55°	181	171
65°	50	54
75°	15	16
85°	0	2
90°	0	



TEST NUMBER: P858683

CATALOG NUMBER: LD4C30W2N2765D010 4LBWH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1828.6
2.5°	1832.5
5°	1828.6
7.5°	1824.8
10°	1813.2
12.5°	1797.8
15°	1778.5
17.5°	1755.4
20°	1720.7
22.5°	1682.4
25°	1620.7
27.5°	1543.6
30°	1447.5
32.5°	1328.2
35°	1185.6
37.5°	1027.8
40°	866.1
42.5°	716.0
45°	573.6
47.5°	446.5
50°	338.7
52.5°	250.3
55°	180.9
57.5°	127.0
60°	92.3
62.5°	69.4
65°	50.1
67.5°	38.5
70°	27.0
72.5°	19.3
75°	15.4
77.5°	7.7
80°	7.7
82.5°	3.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)