

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858688

Luminaire Tested: **LD4C30W2N2765D010 4LBWLI_4000K**

Issue Date: 11/9/2023



Test Information

Test Method: LM-79-08
Report Number: P858688
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 11/9/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C30W2N2765D010 4LBWLI_4000K
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, W2N2765 LEDS
AND 4LBWLI TRIM WITH FINISH

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3237.0 lumens
Efficiency: N/A
Efficacy: 81.7 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 39.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858688

CATALOG NUMBER: LD4C30W2N2765D010 4LBWLI_4000K

Luminous Intensity Polar Plot

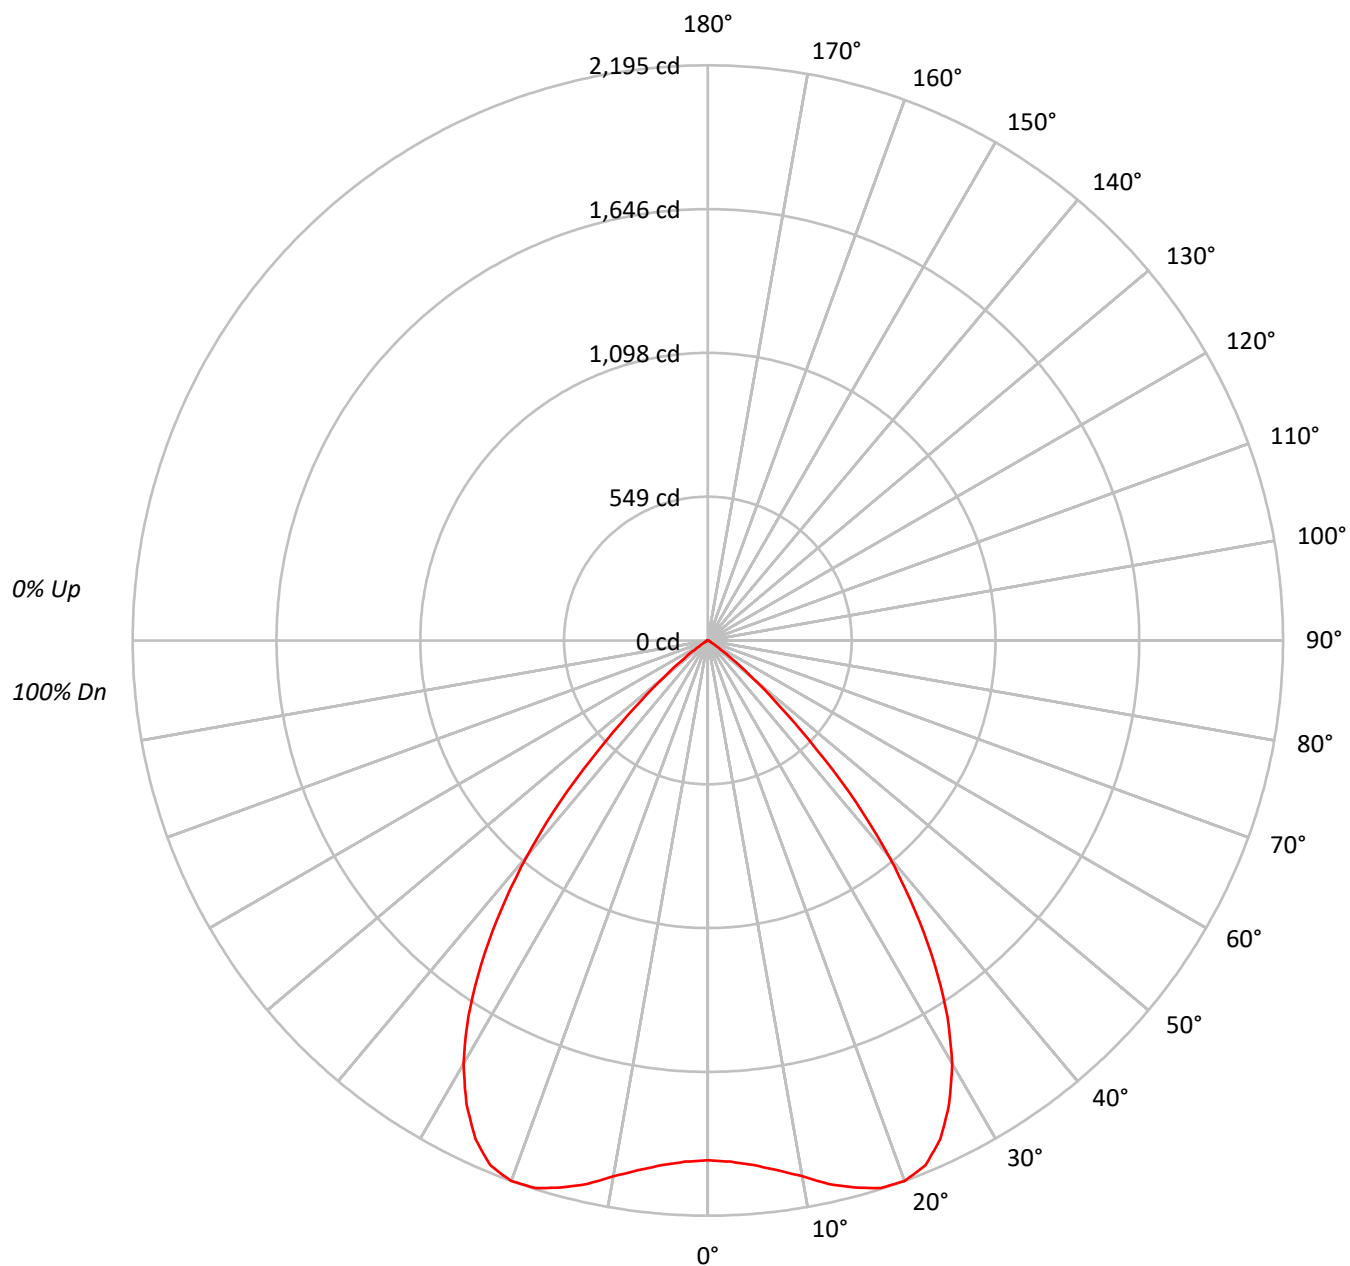



TEST NUMBER: P858688

CATALOG NUMBER: LD4C30W2N2765D010 4LBWLI_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		96	95	94
2	106	101	97	93		104	99	95	92		96	93	90		93	90	88		90	88	86
3	100	93	87	83		98	92	86	82		89	85	81		86	83	80		84	81	78
4	94	86	79	75		92	84	79	74		82	77	73		80	76	72		78	75	72
5	88	79	72	68		87	78	72	67		76	71	67		74	70	66		73	69	65
6	83	73	66	62		82	72	66	61		71	65	61		69	64	60		68	63	60
7	78	68	61	56		77	67	61	56		66	60	56		64	59	55		63	59	55
8	74	63	56	52		72	62	56	51		61	55	51		60	55	51		59	54	51
9	69	59	52	48		68	58	52	47		57	51	47		56	51	47		55	50	47
10	66	55	48	44		65	54	48	44		53	48	44		53	47	44		52	47	43

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	243655
5°	247792
10°	258991
15°	274890
20°	286931
25°	284446
30°	264524
35°	226299
40°	172418
45°	101135
50°	43214
55°	12723
60°	3636
65°	2151
70°	1329
75°	1756
80°	0
85°	0



TEST NUMBER: P858688

CATALOG NUMBER: LD4C30W2N2765D010 4LBWLI_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.0	6.0
10°-20°	612.1	18.9
20°-30°	954.9	29.5
30°-40°	929.1	28.7
40°-50°	464.1	14.3
50°-60°	71.8	2.2
60°-70°	8.7	0.3
70°-80°	2.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1760.9	54.4
0°-40°	2690.0	83.1
0°-60°	3225.9	99.7
0°-90°	3237.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3237.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1983	
5°	2009	194
15°	2161	612
25°	2098	955
35°	1509	929
45°	582	464
55°	59	72
65°	7	9
75°	4	2
85°	0	0
90°	0	



TEST NUMBER: P858688

CATALOG NUMBER: LD4C30W2N2765D010 4LBWLI_4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	1983.3
2.5°	1990.7
5°	2009.3
7.5°	2039.0
10°	2076.1
12.5°	2124.2
15°	2161.3
17.5°	2191.0
20°	2194.7
22.5°	2168.7
25°	2098.4
27.5°	1994.4
30°	1864.7
32.5°	1701.7
35°	1508.9
37.5°	1297.4
40°	1075.1
42.5°	837.9
45°	582.1
47.5°	374.4
50°	226.1
52.5°	122.3
55°	59.4
57.5°	26.0
60°	14.8
62.5°	11.1
65°	7.4
67.5°	7.4
70°	3.7
72.5°	3.7
75°	3.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)