

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859657

Luminaire Tested: **LX4C08D010 EX4C089030 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P859657
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C08D010 EX4C089030 4LBSLI
Description: 4 INCH 800 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 4LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 901.0 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859657

CATALOG NUMBER: LX4C08D010 EX4C089030 4LBSLI

Luminous Intensity Polar Plot

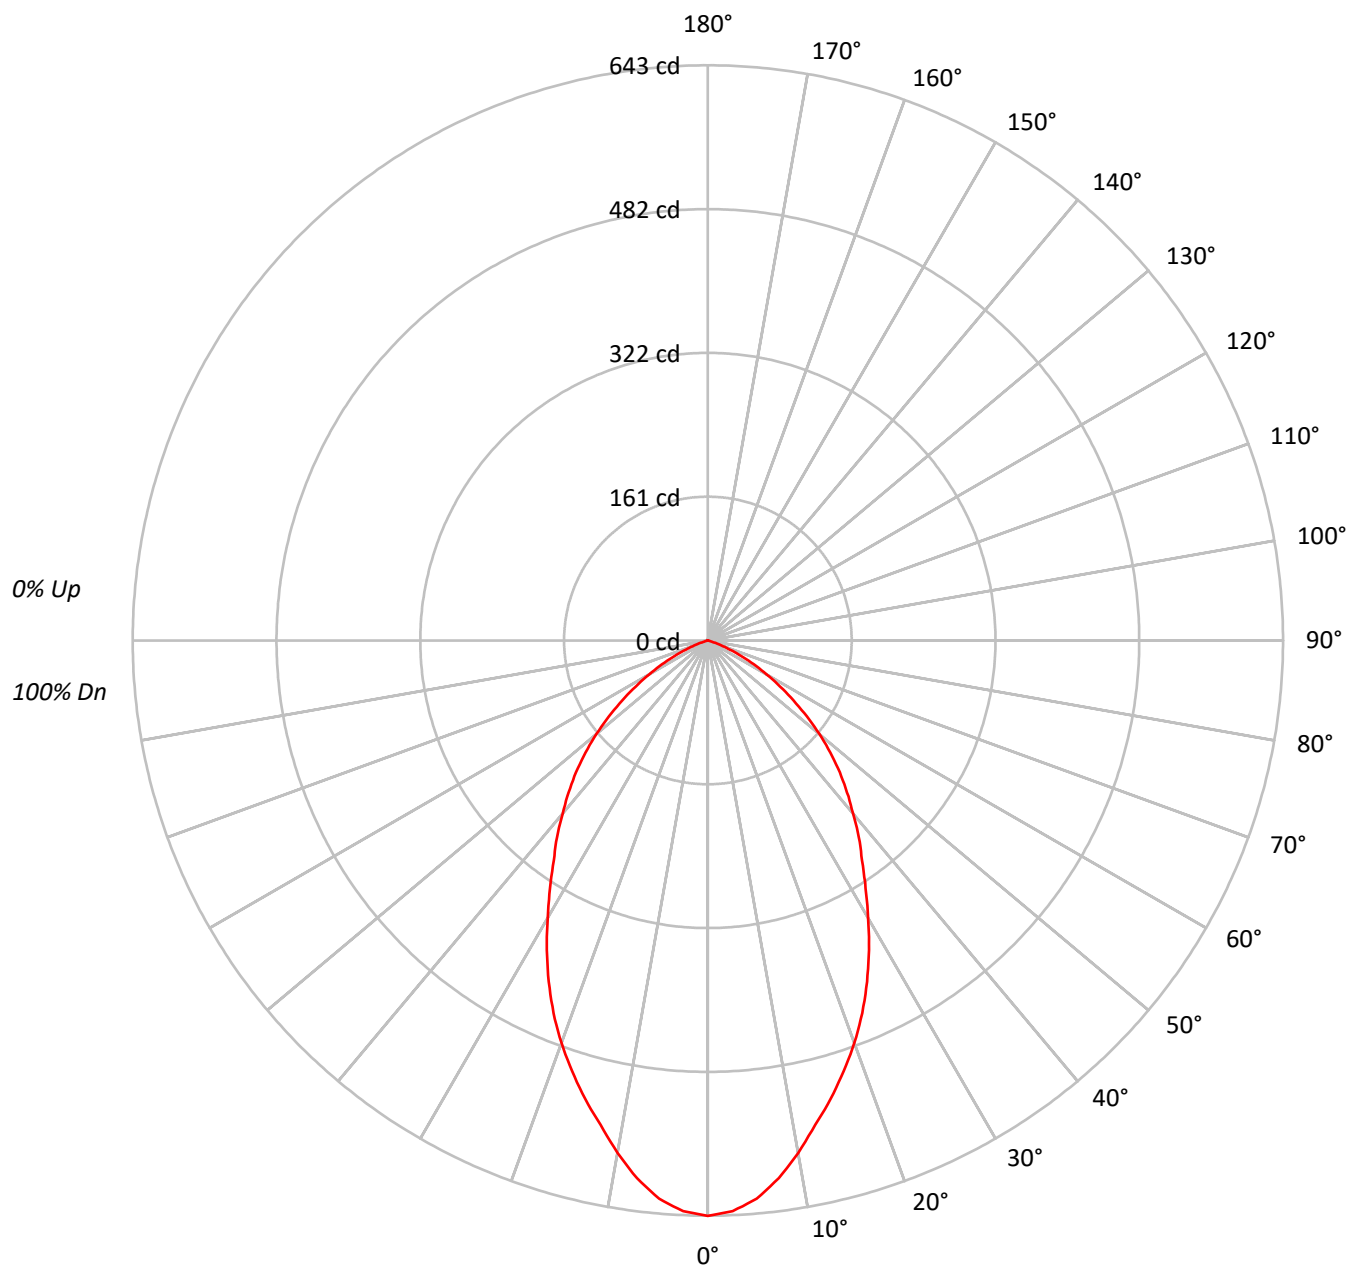



TEST NUMBER: P859657

CATALOG NUMBER: LX4C08D010 EX4C089030 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	112	108	105	102		109	106	103	101		102	100	98		98	96	95		95	93	92
2	104	98	93	88		102	96	91	87		93	89	85		90	86	84		87	84	82
3	97	89	82	77		95	87	81	77		84	79	75		82	78	74		79	76	73
4	90	81	73	68		88	79	73	68		77	71	67		75	70	66		73	69	65
5	84	73	66	61		82	72	65	60		70	64	60		69	63	59		67	62	59
6	79	67	60	54		77	66	59	54		65	58	54		63	58	53		62	57	53
7	74	62	54	49		72	61	54	49		60	53	49		58	53	48		57	52	48
8	69	57	50	45		68	57	50	45		55	49	45		54	49	44		53	48	44
9	65	53	46	41		64	53	46	41		52	45	41		51	45	41		50	44	41
10	61	50	43	38		60	49	42	38		48	42	38		47	42	38		46	41	37

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	79032
5°	77249
10°	72541
15°	67486
20°	62597
25°	57055
30°	50800
35°	45023
40°	40462
45°	36225
50°	31077
55°	24996
60°	18625
65°	11889
70°	5747
75°	949
80°	707
85°	0



TEST NUMBER: P859657

CATALOG NUMBER: LX4C08D010 EX4C089030 4LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.3	6.5
10°-20°	148.8	16.5
20°-30°	192.8	21.4
30°-40°	188.9	21.0
40°-50°	160.1	17.8
50°-60°	105.0	11.6
60°-70°	42.2	4.7
70°-80°	4.8	0.5
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	399.9	44.4
0°-40°	588.8	65.3
0°-60°	853.9	94.8
0°-90°	901.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	901.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	643	
5°	626	58
15°	531	149
25°	421	193
35°	300	189
45°	208	160
55°	117	105
65°	41	42
75°	2	5
85°	0	0
90°	0	



TEST NUMBER: P859657

CATALOG NUMBER: LX4C08D010 EX4C089030 4LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	643.3
2.5°	638.4
5°	626.4
7.5°	606.4
10°	581.5
12.5°	554.6
15°	530.6
17.5°	504.7
20°	478.8
22.5°	450.8
25°	420.9
27.5°	390.0
30°	358.1
32.5°	328.2
35°	300.2
37.5°	277.3
40°	252.3
42.5°	230.4
45°	208.5
47.5°	185.5
50°	162.6
52.5°	139.6
55°	116.7
57.5°	95.8
60°	75.8
62.5°	57.8
65°	40.9
67.5°	26.9
70°	16.0
72.5°	7.0
75°	2.0
77.5°	1.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)