

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859799

Luminaire Tested: **LX4C08D010 EX4C089850 4LBWH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P859799
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C08D010 EX4C089850 4LBWH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 679.5 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859799

CATALOG NUMBER: LX4C08D010 EX4C089850 4LBWH

Luminous Intensity Polar Plot

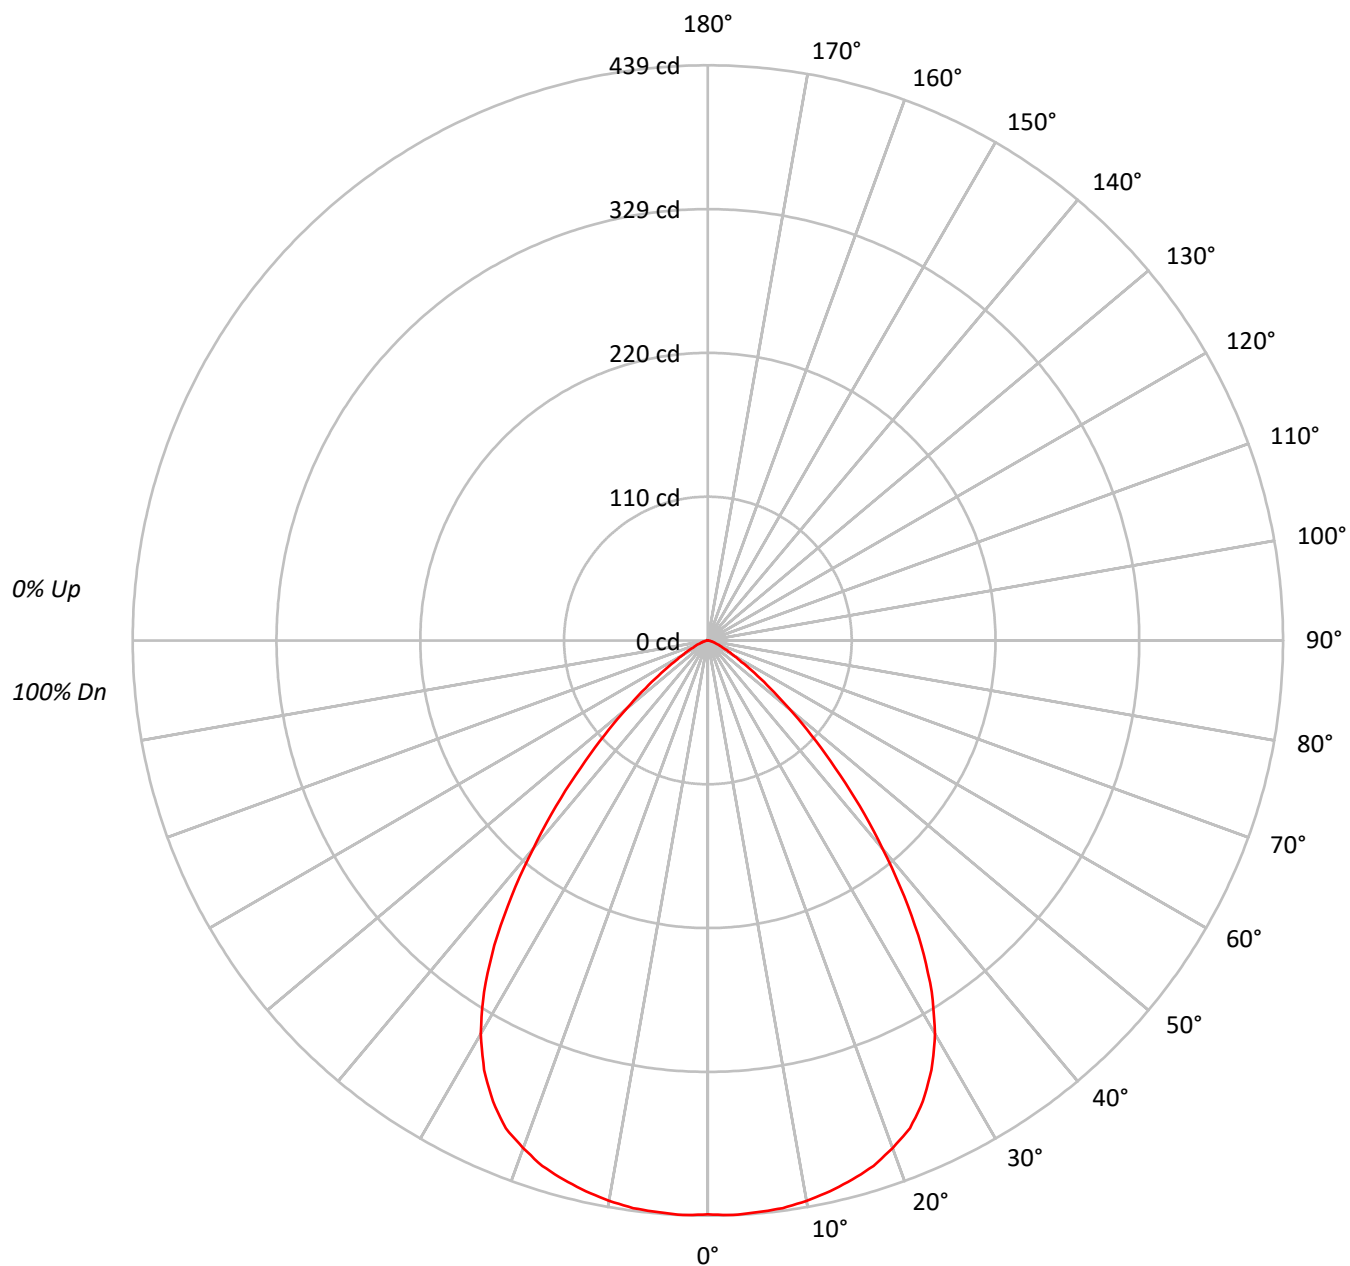



TEST NUMBER: P859799

CATALOG NUMBER: LX4C08D010 EX4C089850 4LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	105	100	95	91	103	98	93	90	95	91	88		91	88	86		89
3	99	91	85	80	97	90	84	80	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	64	74	68	64		72	67	63		70
6	81	71	64	58	80	70	63	58	68	62	58		67	61	57		65
7	76	65	58	53	75	65	58	53	63	57	53		62	56	52		61
8	72	60	53	49	70	60	53	49	59	53	48		58	52	48		57
9	68	56	49	45	66	56	49	45	55	49	44		54	48	44		53
10	64	52	46	41	63	52	46	41	51	45	41		50	45	41		49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	53810
5°	54015
10°	54178
15°	54182
20°	53890
25°	52622
30°	49183
35°	42593
40°	33262
45°	23872
50°	15500
55°	9274
60°	5430
65°	3488
70°	2299
75°	1756
80°	1344
85°	0



TEST NUMBER: P859799

CATALOG NUMBER: LX4C08D010 EX4C089850 4LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.7	6.1
10°-20°	120.2	17.7
20°-30°	177.4	26.1
30°-40°	175.0	25.8
40°-50°	107.1	15.8
50°-60°	41.0	6.0
60°-70°	12.8	1.9
70°-80°	3.8	0.6
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	339.2	49.9
0°-40°	514.3	75.7
0°-60°	662.4	97.5
0°-90°	679.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	679.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	438	
5°	438	42
15°	426	120
25°	388	177
35°	284	175
45°	137	107
55°	43	41
65°	12	13
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P859799

CATALOG NUMBER: LX4C08D010 EX4C089850 4LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	438.0
2.5°	438.9
5°	438.0
7.5°	437.0
10°	434.3
12.5°	430.6
15°	426.0
17.5°	420.5
20°	412.2
22.5°	403.0
25°	388.2
27.5°	369.7
30°	346.7
32.5°	318.1
35°	284.0
37.5°	246.2
40°	207.4
42.5°	171.5
45°	137.4
47.5°	106.9
50°	81.1
52.5°	59.9
55°	43.3
57.5°	30.4
60°	22.1
62.5°	16.6
65°	12.0
67.5°	9.3
70°	6.4
72.5°	4.6
75°	3.7
77.5°	1.9
80°	1.9
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)