

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P778934

Luminaire Tested: LER4D05D010-EC4DR300210IC9030-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P778934
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D05D010-EC4DR300210IC9030-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 685.8 lumens
Efficiency: N/A
Efficacy: 91.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P778934

CATALOG NUMBER: LER4D05D010-EC4DR300210IC9030-4LBS1LI

Luminous Intensity Polar Plot

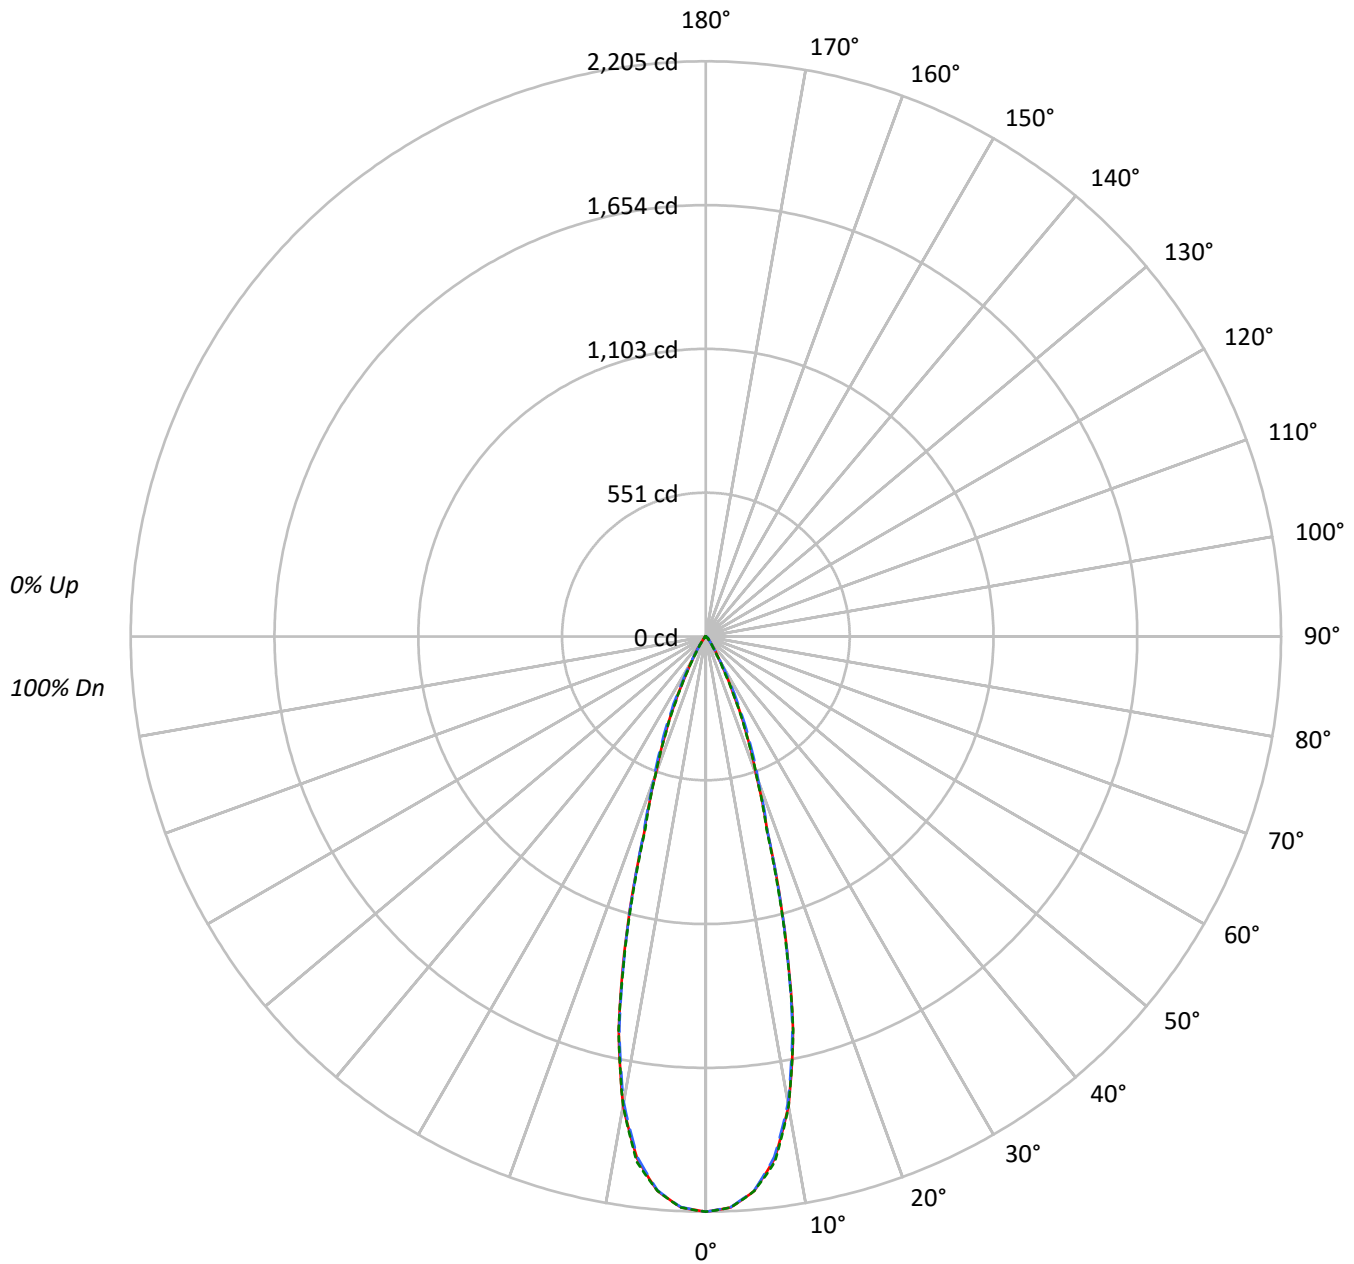

TEST NUMBER: P778934

CATALOG NUMBER: LER4D05D010-EC4DR300210IC9030-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	98	93	90	102	96	93	90	94	91	89		93	90	88		91
5	100	94	89	86	98	93	89	86	91	88	85		90	86	84		88
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85
7	94	87	82	79	92	86	82	79	85	81	78		84	81	78		83
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	168793	168793	168793
5°	163945	163760	163952
10°	142002	140999	141971
15°	92652	92152	91693
20°	46071	47798	46006
25°	23209	26173	22736
30°	9289	10120	8096
35°	4308	4130	3457
40°	1859	2068	1749
45°	1310	1635	1331
50°	453	1191	476
55°	254	494	280
60°	184	214	184
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 1635 cd/sqm



TEST NUMBER: P778934

CATALOG NUMBER: LER4D05D010-EC4DR300210IC9030-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.9	28.3
10°-20°	312.3	45.5
20°-30°	135.0	19.7
30°-40°	30.8	4.5
40°-50°	10.6	1.5
50°-60°	2.6	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	641.2	93.5
0°-40°	671.9	98.0
0°-60°	685.1	99.9
0°-90°	685.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	685.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2205	2205	2205	2205	2205	
5°	2134	2132	2131	2136	2134	194
15°	1169	1155	1163	1159	1157	313
25°	275	285	310	278	269	132
35°	46	47	44	44	37	31
45°	12	15	15	15	12	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P778934

CATALOG NUMBER: LER4D05D010-EC4DR300210IC9030-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2205.2	2205.2	2205.2	2205.2	2205.2
2.5°	2190.6	2189.1	2189.9	2191.0	2191.4
5°	2133.7	2131.7	2131.3	2135.7	2133.8
7.5°	2019.1	2016.2	2011.7	2021.8	2031.2
10°	1827.0	1823.8	1814.1	1818.9	1826.6
12.5°	1543.5	1533.0	1532.8	1547.9	1545.8
15°	1169.2	1155.1	1162.9	1159.1	1157.1
17.5°	786.3	780.8	791.2	788.1	774.6
20°	565.6	567.0	586.8	576.8	564.8
22.5°	412.7	417.8	441.3	415.6	406.2
25°	274.8	285.2	309.9	277.9	269.2
27.5°	169.0	173.8	198.8	166.8	162.1
30°	105.1	102.7	114.5	98.3	91.6
32.5°	69.0	65.9	69.7	62.6	57.2
35°	46.1	47.1	44.2	43.8	37.0
37.5°	28.8	33.1	29.2	31.2	23.8
40°	18.6	24.1	20.7	22.9	17.5
42.5°	15.2	18.5	17.0	18.1	15.6
45°	12.1	15.1	15.1	15.1	12.3
47.5°	6.7	10.1	12.9	10.3	7.2
50°	3.8	5.1	10.0	5.3	4.0
52.5°	2.6	2.9	6.8	3.0	2.7
55°	1.9	2.1	3.7	2.2	2.1
57.5°	1.5	1.6	1.9	1.6	1.5
60°	1.2	1.2	1.4	1.3	1.2
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)