

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779262

Luminaire Tested: LER4D08D010-EC4DR350210IC9024-4LBS1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P779262  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER4D08D010-EC4DR350210IC9024-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 688.5 lumens  
Efficiency: N/A  
Efficacy: 77.4 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P779262

CATALOG NUMBER: LER4D08D010-EC4DR350210IC9024-4LBS1LI

### Luminous Intensity Polar Plot

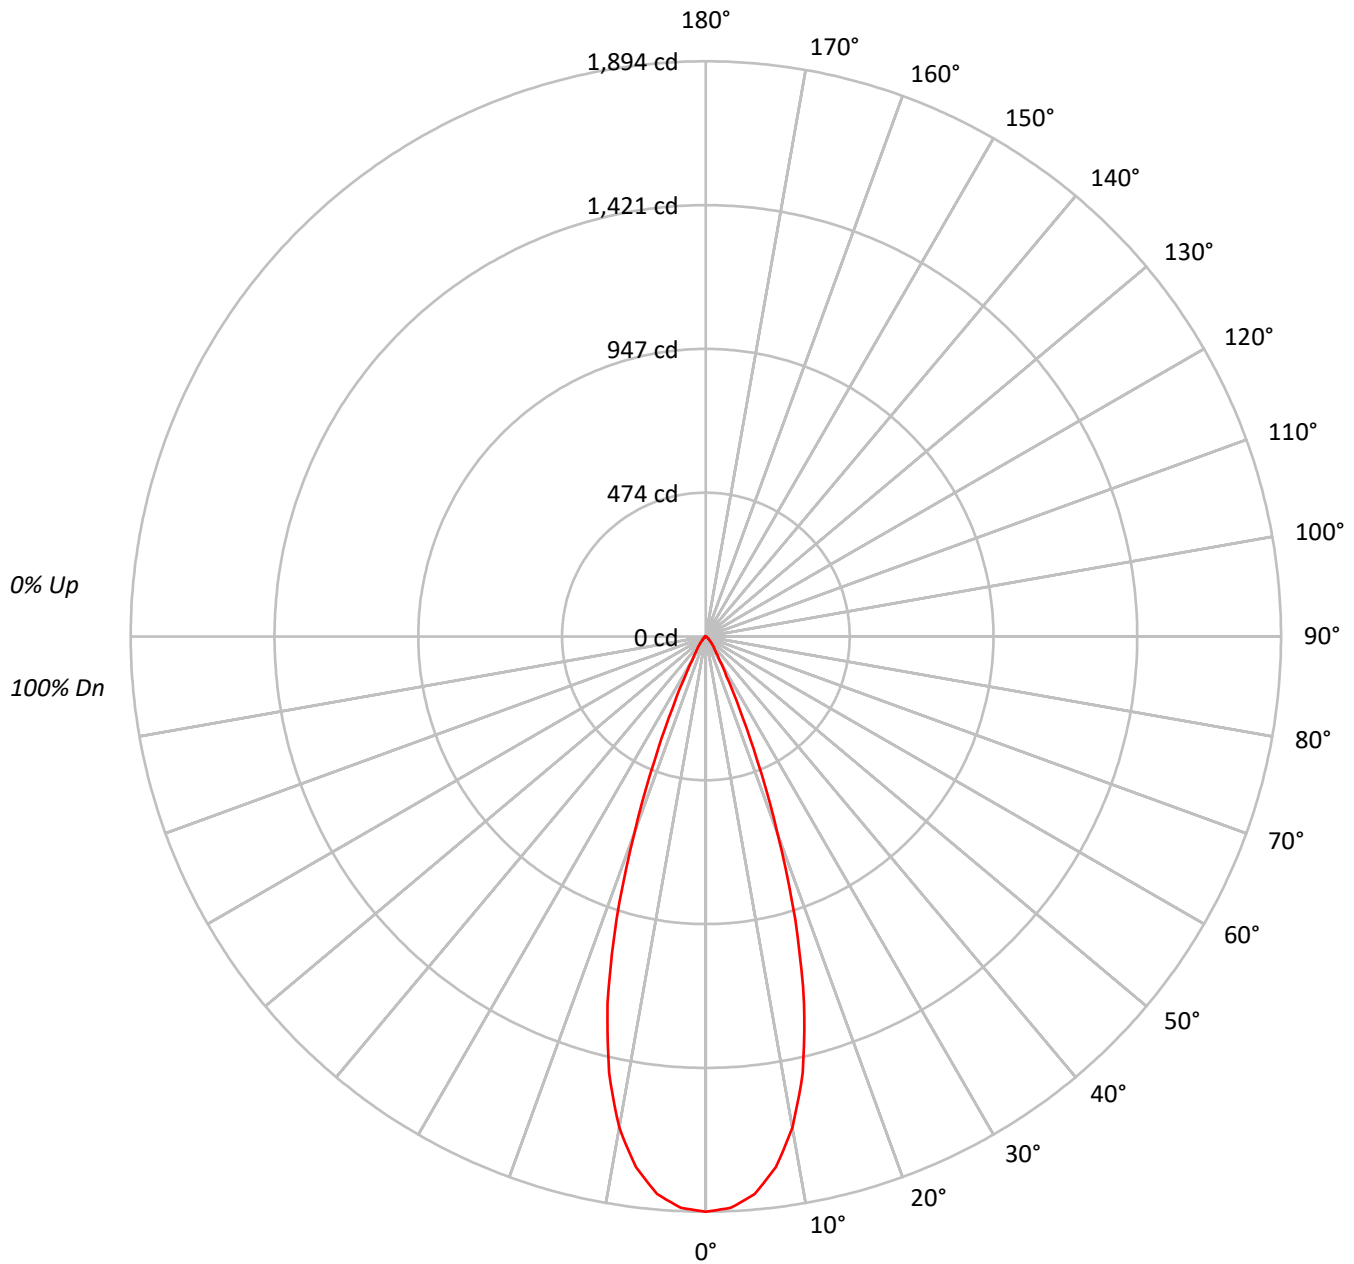



TEST NUMBER: P779262

CATALOG NUMBER: LER4D08D010-EC4DR350210IC9024-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 |  | 103 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 103 | 101 | 108 | 105 | 102 | 99  | 102 | 99  | 97  |  | 99  | 97  | 95  |  | 96  |
| 3   | 106 | 101 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 95  | 92  |  | 95  | 93  | 91  |  | 93  |
| 4   | 103 | 97  | 92  | 89  | 101 | 96  | 92  | 89  | 94  | 90  | 88  |  | 92  | 89  | 87  |  | 90  |
| 5   | 99  | 93  | 88  | 85  | 98  | 92  | 87  | 84  | 90  | 86  | 84  |  | 89  | 85  | 83  |  | 87  |
| 6   | 96  | 89  | 84  | 81  | 94  | 88  | 84  | 81  | 87  | 83  | 80  |  | 85  | 82  | 80  |  | 84  |
| 7   | 93  | 85  | 81  | 78  | 91  | 85  | 80  | 77  | 84  | 80  | 77  |  | 83  | 79  | 77  |  | 82  |
| 8   | 90  | 82  | 78  | 74  | 88  | 82  | 77  | 74  | 81  | 77  | 74  |  | 80  | 76  | 74  |  | 79  |
| 9   | 87  | 79  | 75  | 72  | 86  | 79  | 75  | 72  | 78  | 74  | 71  |  | 77  | 74  | 71  |  | 77  |
| 10  | 84  | 77  | 72  | 69  | 83  | 76  | 72  | 69  | 76  | 72  | 69  |  | 75  | 71  | 69  |  | 74  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 206984 |
| 5°  | 202115 |
| 10° | 182163 |
| 15° | 141383 |
| 20° | 80193  |
| 25° | 31200  |
| 30° | 11632  |
| 35° | 6376   |
| 40° | 4165   |
| 45° | 2534   |
| 50° | 1615   |
| 55° | 1143   |
| 60° | 830    |
| 65° | 465    |
| 70° | 32     |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2534 cd/sqm



TEST NUMBER: P779262

CATALOG NUMBER: LER4D08D010-EC4DR350210IC9024-4LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 169.5  | 24.6      |
| 10°-20°   | 330.9  | 48.1      |
| 20°-30°   | 135.0  | 19.6      |
| 30°-40°   | 32.3   | 4.7       |
| 40°-50°   | 13.4   | 2.0       |
| 50°-60°   | 5.6    | 0.8       |
| 60°-70°   | 1.7    | 0.3       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 635.4  | 92.3      |
| 0°-40°    | 667.6  | 97.0      |
| 0°-60°    | 686.7  | 99.7      |
| 0°-90°    | 688.5  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 688.5  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1894 |      |
| 5°  | 1843 | 169  |
| 15° | 1250 | 331  |
| 25° | 259  | 135  |
| 35° | 48   | 32   |
| 45° | 16   | 13   |
| 55° | 6    | 6    |
| 65° | 2    | 2    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P779262

CATALOG NUMBER: LER4D08D010-EC4DR350210IC9024-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1894.4 |
| 2.5°  | 1883.1 |
| 5°    | 1842.8 |
| 7.5°  | 1762.7 |
| 10°   | 1641.9 |
| 12.5° | 1471.9 |
| 15°   | 1249.9 |
| 17.5° | 978.5  |
| 20°   | 689.7  |
| 22.5° | 439.8  |
| 25°   | 258.8  |
| 27.5° | 146.3  |
| 30°   | 92.2   |
| 32.5° | 64.8   |
| 35°   | 47.8   |
| 37.5° | 37.0   |
| 40°   | 29.2   |
| 42.5° | 22.5   |
| 45°   | 16.4   |
| 47.5° | 12.3   |
| 50°   | 9.5    |
| 52.5° | 7.6    |
| 55°   | 6.0    |
| 57.5° | 4.9    |
| 60°   | 3.8    |
| 62.5° | 2.8    |
| 65°   | 1.8    |
| 67.5° | 0.6    |
| 70°   | 0.1    |
| 72.5° | 0.1    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.1    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)