Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779326

Luminaire Tested: LER4D08D010-EC4DR450210IC9040-4LBS1LI

Issue Date: 1/30/2024

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Test Information

Test Method:	LM-79-2019
Report Number:	P779326
	TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab:	COOPER LIGHTING SOLUTIONS
Issue Date:	1/30/2024
Manufacturer:	COOPER LIGHTING SOLUTIONS
Product Line:	PORTFOLIO
Catalog Number:	LER4D08D010-EC4DR450210IC9040-4LBS1LI
Description:	4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source:	(1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver:	-

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	918.0 lumens
Efficiency:	N/A
Efficacy:	103.2 lumens/watt
Spacing Criteria (0/90/45):	0.75 / 0.75 / 0.69
Luminous Opening:	Circular (Dia: 0.35' x H: 0')
CIE Type:	Direct

Input Watts (W):	8.9
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	24 FT

Downlight

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P779326
CATALOG NUMBER: LER4D08D010-EC4DR450210IC9040-4LBS1LI

Luminous Intensity Polar Plot

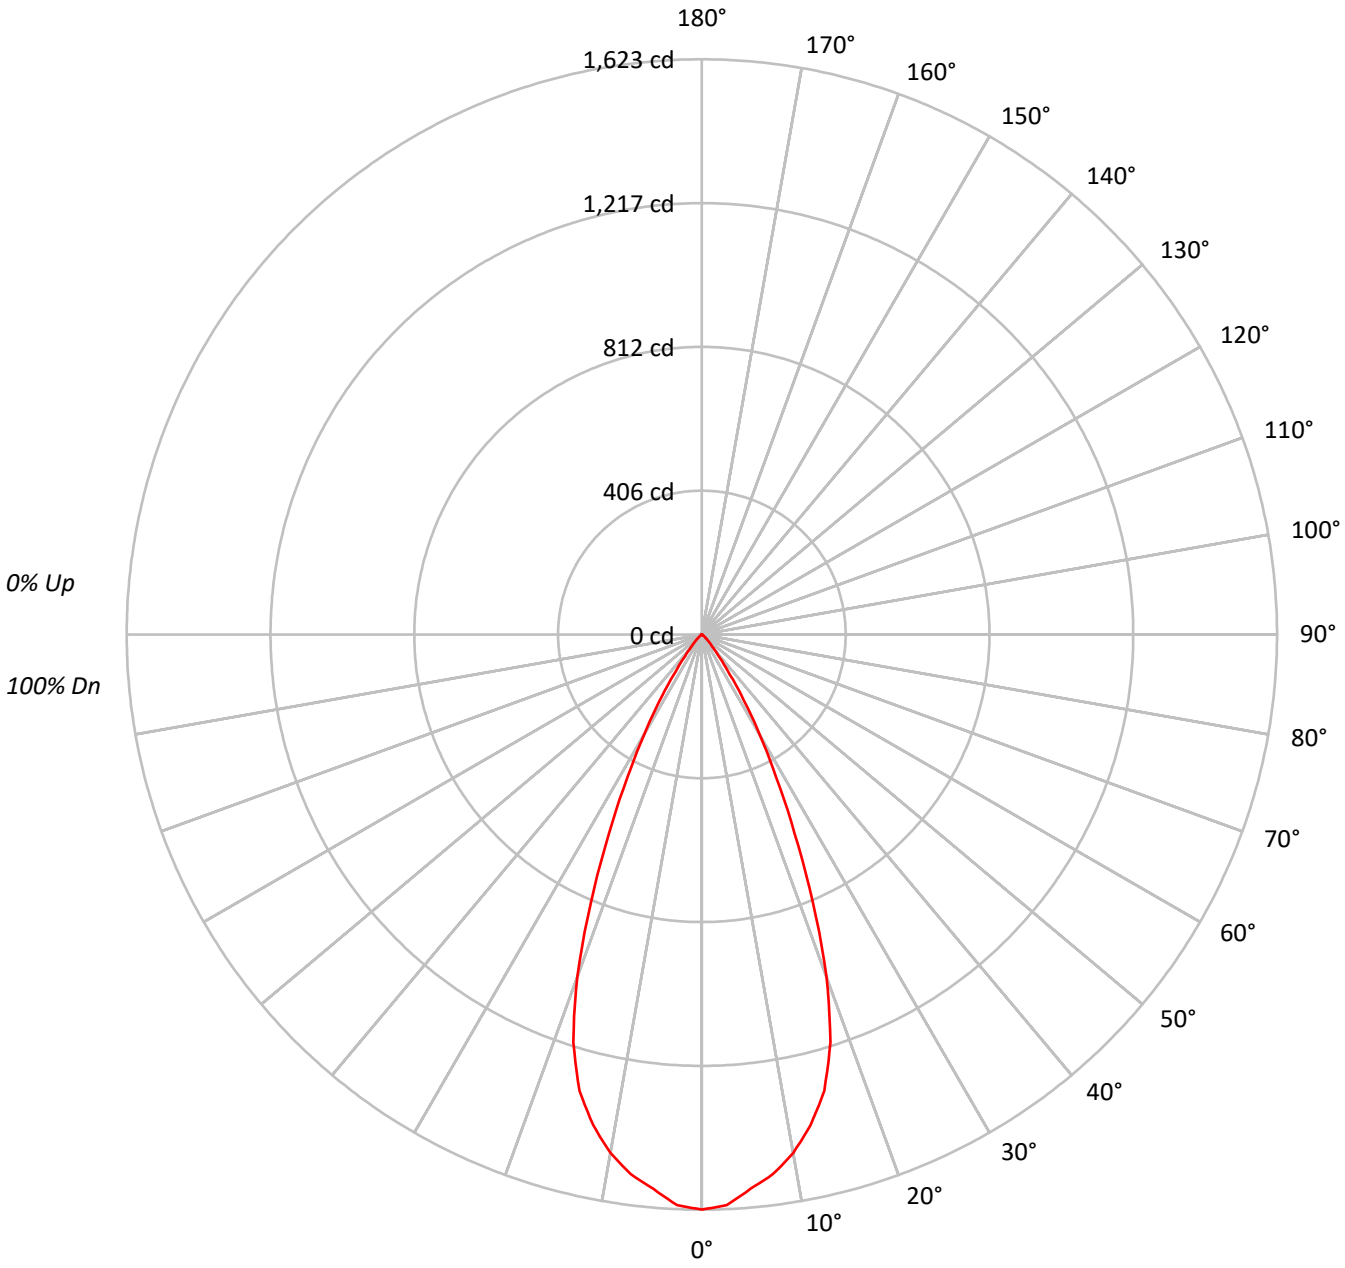

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P779326
CATALOG NUMBER: LER4D08D010-EC4DR450210IC9040-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	177297
5°	172249
10°	164789
15°	150816
20°	119656
25°	74696
30°	41180
35°	18487
40°	7274
45°	3430
50°	1632
55°	857
60°	415
65°	103
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3430 cd/sqm

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P779326
CATALOG NUMBER: LER4D08D010-EC4DR450210IC9040-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.6	16.1
10°-20°	363.2	39.6
20°-30°	287.6	31.3
30°-40°	95.8	10.4
40°-50°	19.0	2.1
50°-60°	4.3	0.5
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	798.3	87.0
0°-40°	894.1	97.4
0°-60°	917.4	99.9
0°-90°	918.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	918.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1623	
5°	1570	148
15°	1333	363
25°	620	288
35°	139	96
45°	22	19
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P779326
CATALOG NUMBER: LER4D08D010-EC4DR450210IC9040-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1622.7
2.5°	1612.1
5°	1570.5
7.5°	1536.1
10°	1485.3
12.5°	1417.7
15°	1333.3
17.5°	1206.5
20°	1029.1
22.5°	817.7
25°	619.6
27.5°	453.7
30°	326.4
32.5°	222.0
35°	138.6
37.5°	82.2
40°	51.0
42.5°	33.6
45°	22.2
47.5°	14.3
50°	9.6
52.5°	6.4
55°	4.5
57.5°	2.9
60°	1.9
62.5°	1.0
65°	0.4
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Report Generated By 670245859 / DESKTOP-T8S5UU9

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

0°-180°

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

(END OF REPORT)