

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779422

Luminaire Tested: LER4D08D010-EC4DR650210IC9040-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P779422
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D08D010-EC4DR650210IC9040-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 785.4 lumens
Efficiency: N/A
Efficacy: 88.2 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P779422

CATALOG NUMBER: LER4D08D010-EC4DR650210IC9040-4LBS1LI

Luminous Intensity Polar Plot

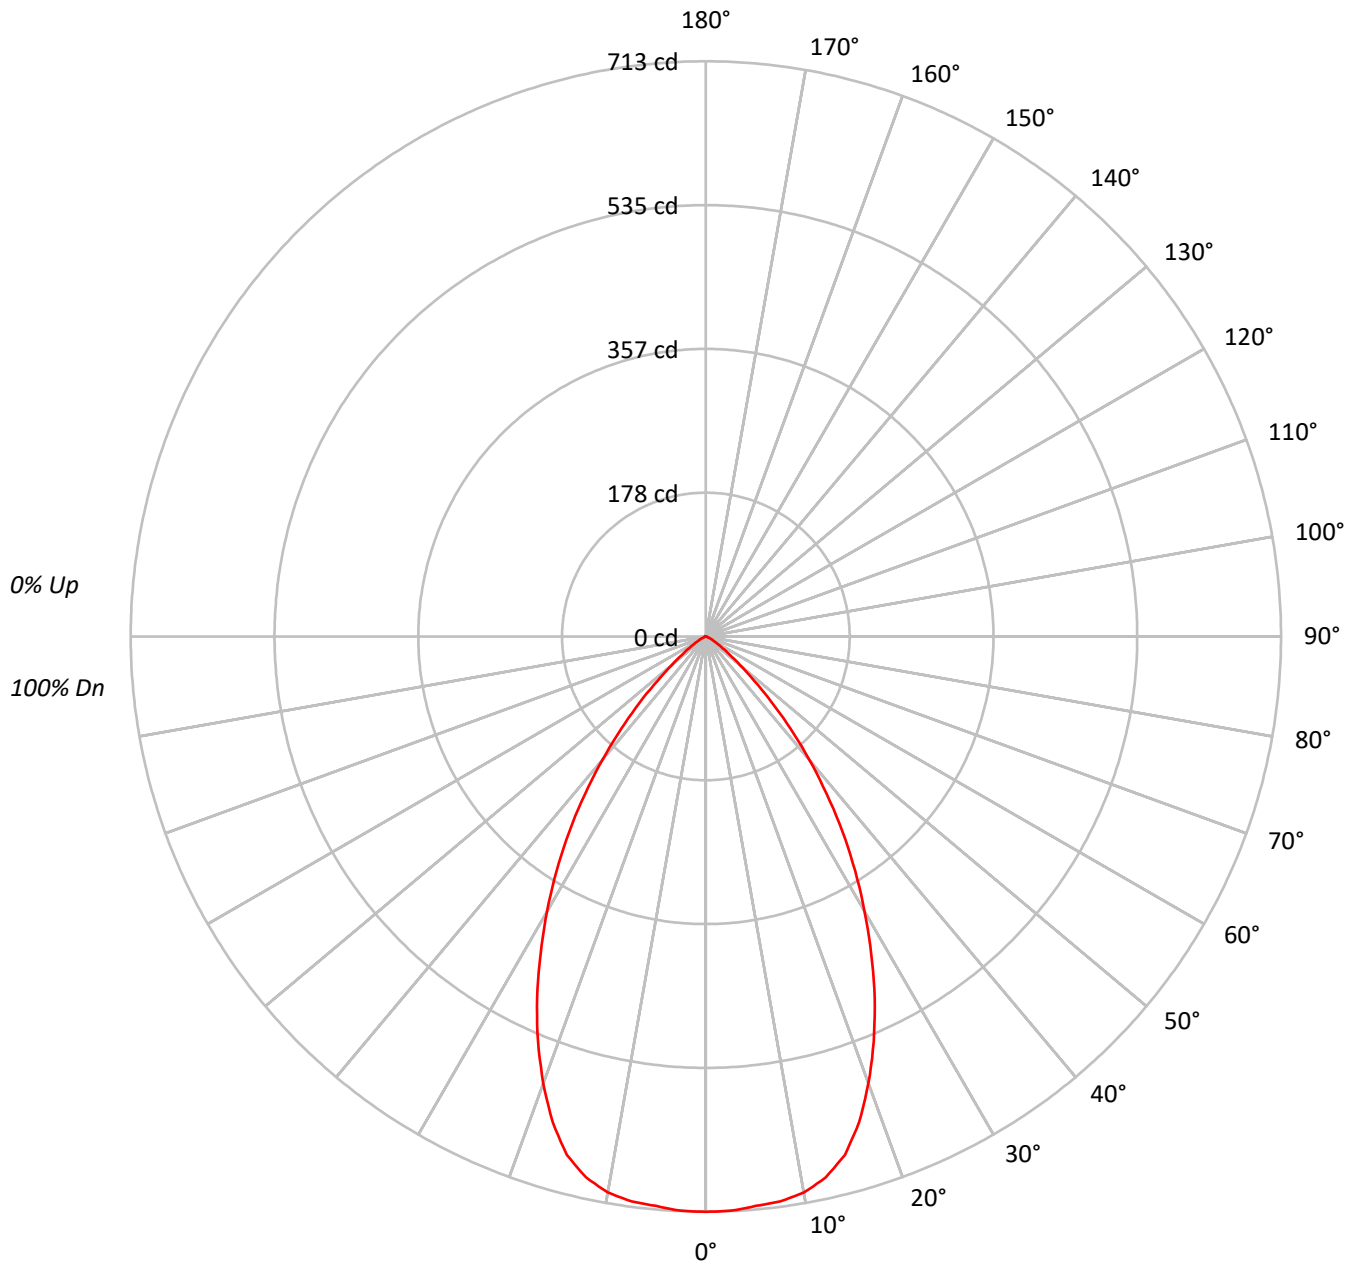

TEST NUMBER: P779422

CATALOG NUMBER: LER4D08D010-EC4DR650210IC9040-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	41654
5°	41543
10°	41507
15°	40233
20°	36626
25°	31918
30°	26544
35°	21033
40°	15180
45°	9589
50°	4997
55°	2658
60°	1402
65°	774
70°	324
75°	338
80°	235
85°	201

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9589 cd/sqm



TEST NUMBER: P779422

CATALOG NUMBER: LER4D08D010-EC4DR650210IC9040-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	67.4	8.6
10°-20°	184.7	23.5
20°-30°	225.7	28.7
30°-40°	183.2	23.3
40°-50°	91.3	11.6
50°-60°	25.5	3.2
60°-70°	5.8	0.7
70°-80°	1.5	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	477.9	60.8
0°-40°	661.0	84.2
0°-60°	777.7	99.0
0°-90°	785.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	785.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	713	
5°	709	67
15°	665	185
25°	495	226
35°	295	183
45°	116	91
55°	26	25
65°	6	6
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P779422

CATALOG NUMBER: LER4D08D010-EC4DR650210IC9040-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	713.2
2.5°	712.6
5°	708.6
7.5°	706.3
10°	699.9
12.5°	686.9
15°	665.4
17.5°	631.6
20°	589.3
22.5°	543.6
25°	495.3
27.5°	443.6
30°	393.6
32.5°	344.2
35°	295.0
37.5°	245.9
40°	199.1
42.5°	155.3
45°	116.1
47.5°	80.9
50°	55.0
52.5°	37.9
55°	26.1
57.5°	17.6
60°	12.0
62.5°	8.3
65°	5.6
67.5°	2.8
70°	1.9
72.5°	1.8
75°	1.5
77.5°	1.0
80°	0.7
82.5°	0.5
85°	0.3
87.5°	0.2
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)