

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779548

Luminaire Tested: LER4D10D010-EC4DR300210IC9024-4LBS1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P779548
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D10D010-EC4DR300210IC9024-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 840.3 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P779548

CATALOG NUMBER: LER4D10D010-EC4DR300210IC9024-4LBS1B

Luminous Intensity Polar Plot

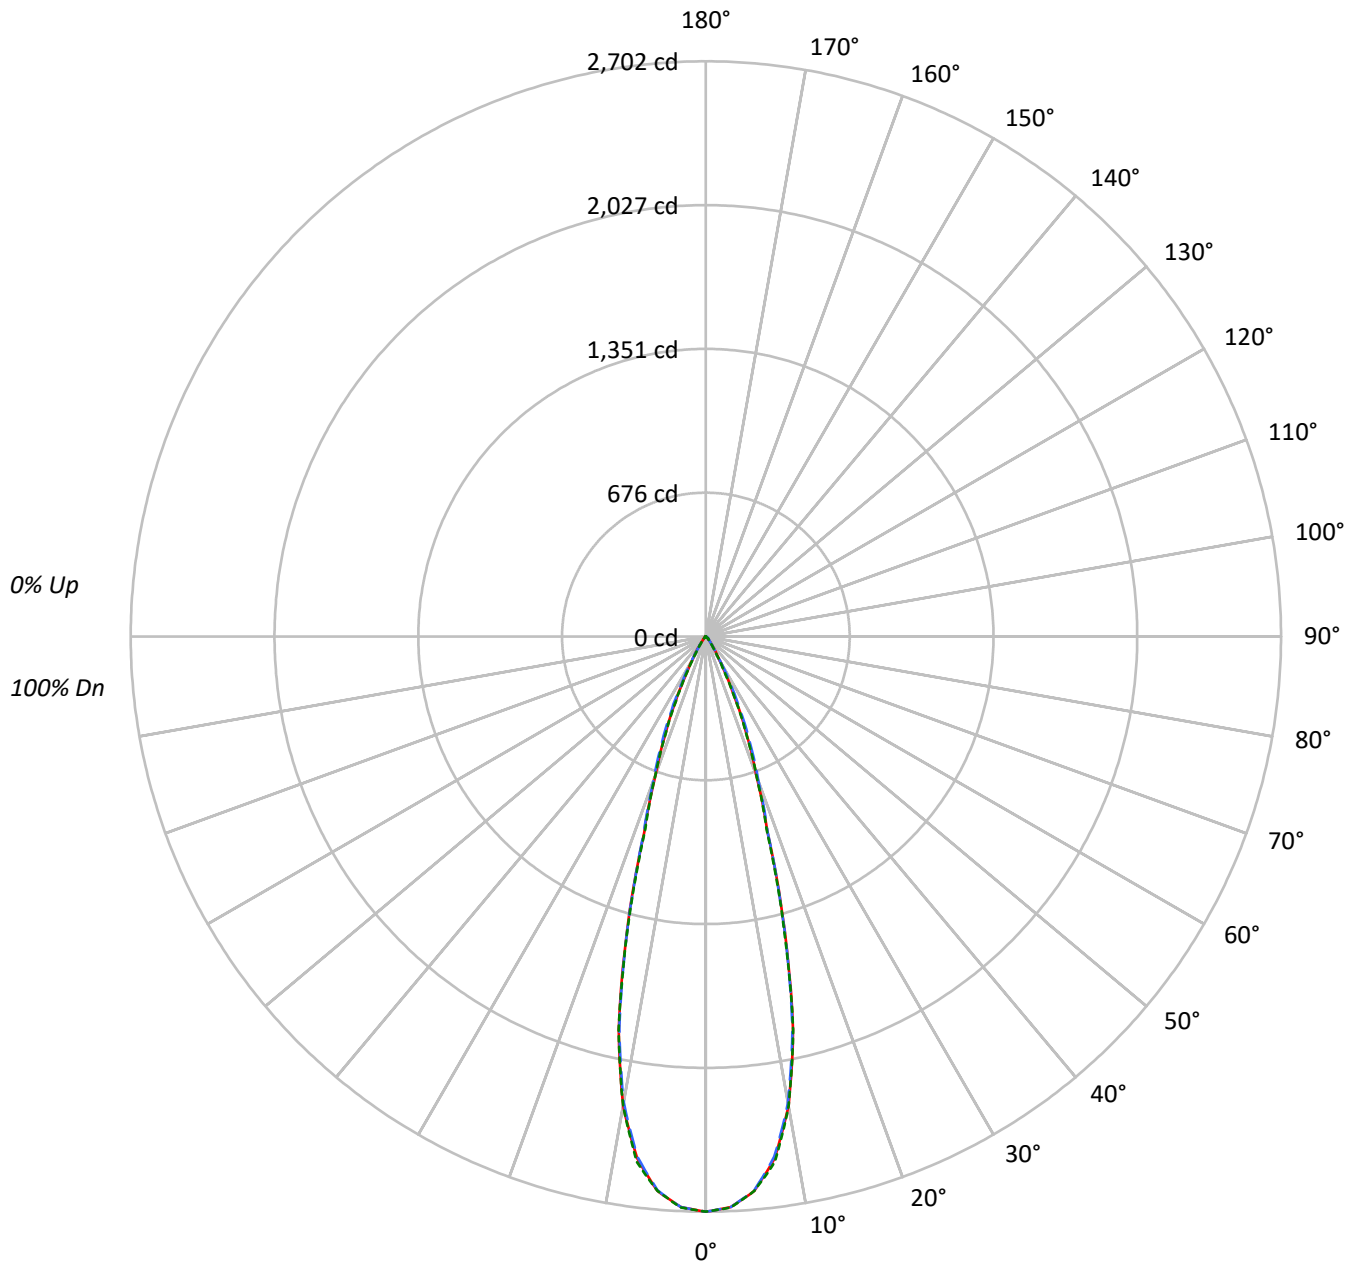

TEST NUMBER: P779548

CATALOG NUMBER: LER4D10D010-EC4DR300210IC9024-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	98	93	90	102	96	93	90	94	91	89		93	90	88		91
5	100	94	89	86	98	93	89	86	91	88	85		90	87	84		88
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85
7	94	87	82	79	92	86	82	79	85	81	78		84	81	78		83
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	206813	206813	206813
5°	200879	200641	200887
10°	173993	172765	173947
15°	113516	112914	112344
20°	56449	58567	56376
25°	28436	32060	27854
30°	11384	12409	9917
35°	5279	5055	4242
40°	2278	2528	2148
45°	1602	1992	1624
50°	548	1453	583
55°	320	601	334
60°	214	260	214
65°	145	145	145
70°	90	67	90
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 1992 cd/sqm



TEST NUMBER: P779548

CATALOG NUMBER: LER4D10D010-EC4DR300210IC9024-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	237.6	28.3
10°-20°	382.6	45.5
20°-30°	165.3	19.7
30°-40°	37.7	4.5
40°-50°	12.9	1.5
50°-60°	3.2	0.4
60°-70°	0.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	785.6	93.5
0°-40°	823.3	98.0
0°-60°	839.4	99.9
0°-90°	840.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	840.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2702	2702	2702	2702	2702	
5°	2614	2612	2611	2617	2614	238
15°	1432	1415	1425	1420	1418	384
25°	337	349	380	340	330	161
35°	56	58	54	54	45	38
45°	15	18	18	18	15	11
55°	2	2	4	3	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P779548

CATALOG NUMBER: LER4D10D010-EC4DR300210IC9024-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2701.9	2701.9	2701.9	2701.9	2701.9
2.5°	2684.0	2682.2	2683.2	2684.6	2685.1
5°	2614.4	2611.9	2611.3	2616.7	2614.5
7.5°	2473.9	2470.3	2464.8	2477.2	2488.7
10°	2238.6	2234.6	2222.8	2228.6	2238.0
12.5°	1891.1	1878.2	1878.0	1896.6	1894.1
15°	1432.5	1415.3	1424.9	1420.2	1417.7
17.5°	963.4	956.7	969.4	965.6	949.0
20°	693.0	694.7	719.0	706.8	692.1
22.5°	505.7	511.9	540.7	509.2	497.7
25°	336.7	349.4	379.6	340.5	329.8
27.5°	207.1	212.9	243.6	204.4	198.6
30°	128.8	125.9	140.4	120.4	112.2
32.5°	84.5	80.8	85.4	76.7	70.0
35°	56.5	57.7	54.1	53.7	45.4
37.5°	35.3	40.6	35.8	38.2	29.2
40°	22.8	29.4	25.3	28.0	21.5
42.5°	18.7	22.7	20.9	22.2	19.1
45°	14.8	18.4	18.4	18.4	15.0
47.5°	8.3	12.3	15.8	12.6	8.8
50°	4.6	6.2	12.2	6.5	4.9
52.5°	3.2	3.6	8.4	3.7	3.3
55°	2.4	2.5	4.5	2.6	2.5
57.5°	1.8	2.0	2.4	2.0	1.8
60°	1.4	1.4	1.7	1.6	1.4
62.5°	1.1	1.1	1.2	1.1	1.1
65°	0.8	0.8	0.8	0.8	0.8
67.5°	0.4	0.5	0.5	0.5	0.5
70°	0.4	0.3	0.3	0.3	0.4
72.5°	0.3	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)