

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779654

Luminaire Tested: LER4D10D010-EC4DR500210IC9030-4LBS1LI

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P779654  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER4D10D010-EC4DR500210IC9030-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1145.8 lumens  
Efficiency: N/A  
Efficacy: 97.9 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P779654

CATALOG NUMBER: LER4D10D010-EC4DR500210IC9030-4LBS1LI

### Luminous Intensity Polar Plot

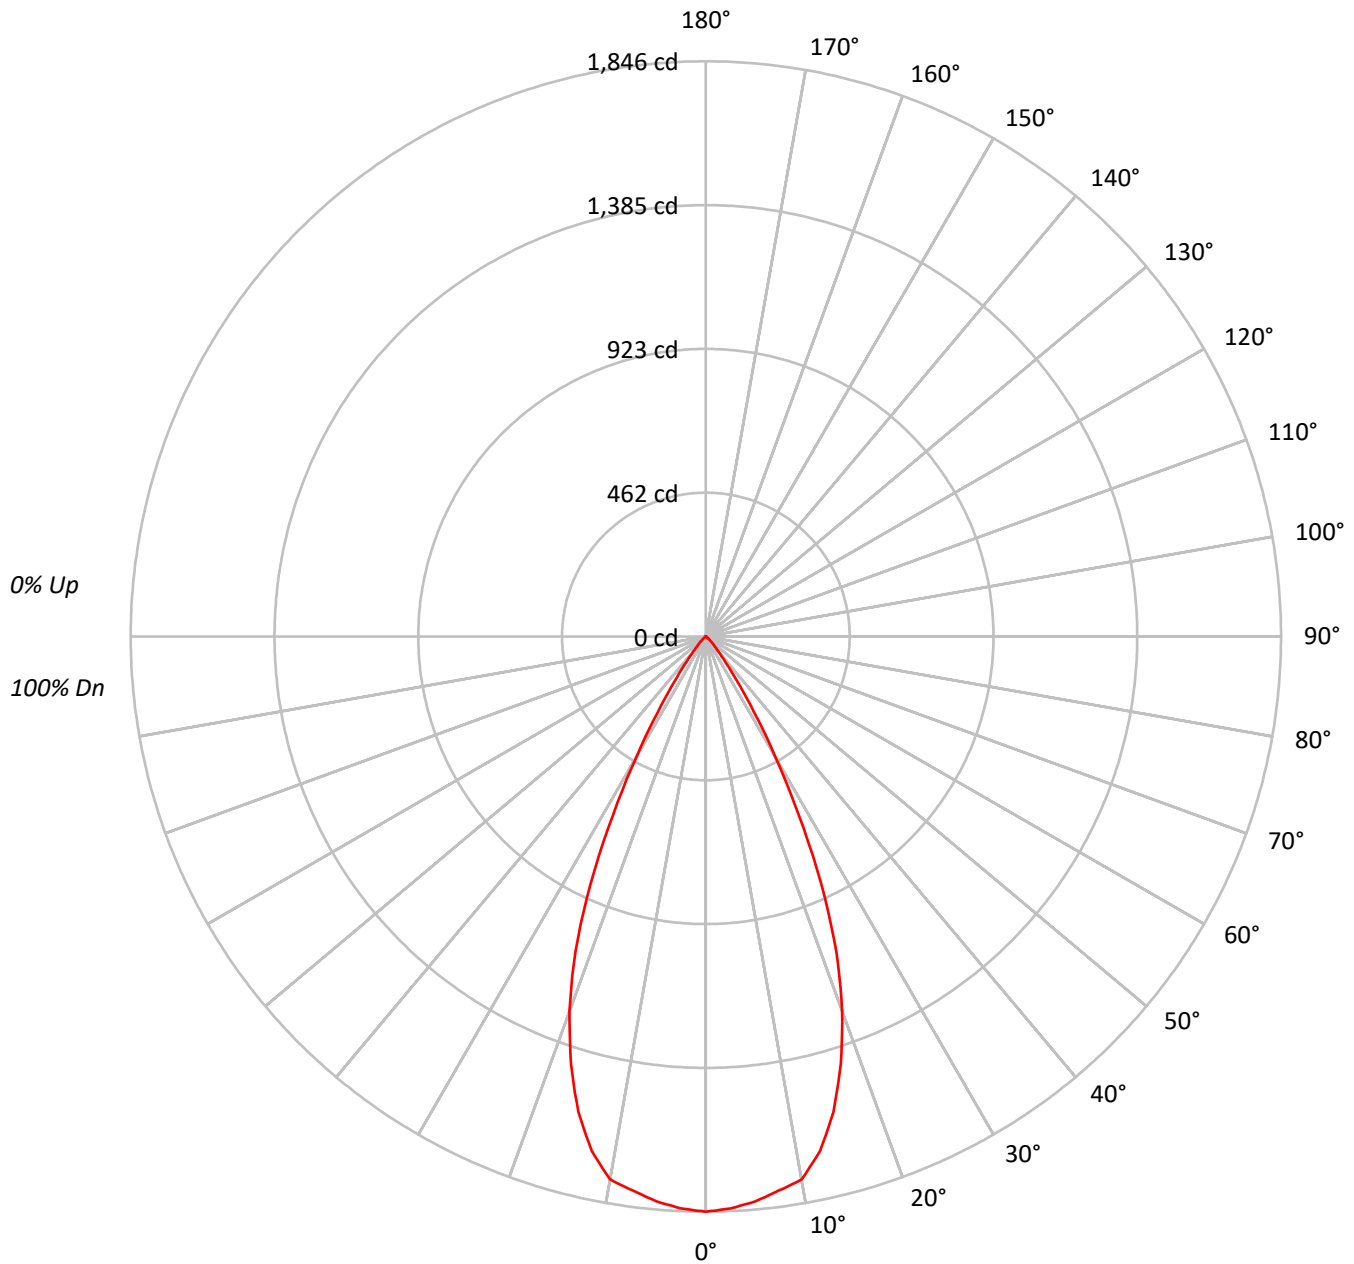



TEST NUMBER: P779654

CATALOG NUMBER: LER4D10D010-EC4DR500210IC9030-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 112 | 109 | 107 | 112 | 110 | 108 | 106 | 106 | 104 | 102 | 102 | 101 | 99  | 98  | 97  | 97  | 97  | 97  | 95  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 91  | 91  | 90  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 88  | 86  | 86  | 86  | 85  |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 90  | 87  | 84  | 89  | 85  | 83  | 87  | 84  | 82  | 82  | 82  | 80  |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 79  | 85  | 81  | 78  | 83  | 80  | 77  | 77  | 77  | 76  |
| 6   | 92  | 84  | 79  | 75  | 91  | 83  | 79  | 75  | 82  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 74  | 74  | 74  | 72  |
| 7   | 88  | 80  | 75  | 71  | 87  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 70  | 76  | 73  | 70  | 70  | 70  | 69  |
| 8   | 85  | 76  | 71  | 67  | 84  | 76  | 71  | 67  | 75  | 70  | 67  | 74  | 70  | 67  | 73  | 69  | 66  | 66  | 66  | 65  |
| 9   | 81  | 73  | 68  | 64  | 80  | 72  | 67  | 64  | 71  | 67  | 64  | 71  | 67  | 64  | 70  | 66  | 63  | 63  | 63  | 62  |
| 10  | 78  | 70  | 64  | 61  | 77  | 69  | 64  | 61  | 68  | 64  | 61  | 68  | 64  | 61  | 67  | 63  | 60  | 60  | 60  | 59  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 201717 |
| 5°  | 199603 |
| 10° | 196308 |
| 15° | 178767 |
| 20° | 148748 |
| 25° | 105595 |
| 30° | 55890  |
| 35° | 22768  |
| 40° | 8458   |
| 45° | 3863   |
| 50° | 1581   |
| 55° | 838    |
| 60° | 415    |
| 65° | 129    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3863 cd/sqm



TEST NUMBER: P779654

CATALOG NUMBER: LER4D10D010-EC4DR500210IC9030-4LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 172.0  | 15.0      |
| 10°-20°   | 434.7  | 37.9      |
| 20°-30°   | 390.5  | 34.1      |
| 30°-40°   | 122.3  | 10.7      |
| 40°-50°   | 21.4   | 1.9       |
| 50°-60°   | 4.3    | 0.4       |
| 60°-70°   | 0.7    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 997.2  | 87.0      |
| 0°-40°    | 1119.5 | 97.7      |
| 0°-60°    | 1145.2 | 99.9      |
| 0°-90°    | 1145.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1145.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1846 |      |
| 5°  | 1820 | 172  |
| 15° | 1580 | 435  |
| 25° | 876  | 391  |
| 35° | 171  | 122  |
| 45° | 25   | 21   |
| 55° | 4    | 4    |
| 65° | 0    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P779654

CATALOG NUMBER: LER4D10D010-EC4DR500210IC9030-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1846.2 |
| 2.5°  | 1837.1 |
| 5°    | 1819.9 |
| 7.5°  | 1793.7 |
| 10°   | 1769.4 |
| 12.5° | 1691.6 |
| 15°   | 1580.4 |
| 17.5° | 1439.0 |
| 20°   | 1279.3 |
| 22.5° | 1094.6 |
| 25°   | 875.9  |
| 27.5° | 643.9  |
| 30°   | 443.0  |
| 32.5° | 288.4  |
| 35°   | 170.7  |
| 37.5° | 98.1   |
| 40°   | 59.3   |
| 42.5° | 38.6   |
| 45°   | 25.0   |
| 47.5° | 15.2   |
| 50°   | 9.3    |
| 52.5° | 6.4    |
| 55°   | 4.4    |
| 57.5° | 3.0    |
| 60°   | 1.9    |
| 62.5° | 1.1    |
| 65°   | 0.5    |
| 67.5° | 0.2    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)