

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P779878

Luminaire Tested: LER4D15D010-EC4DR300215IC9040-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P779878
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D15D010-EC4DR300215IC9040-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1572.4 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P779878

CATALOG NUMBER: LER4D15D010-EC4DR300215IC9040-4LBS1LI

Luminous Intensity Polar Plot

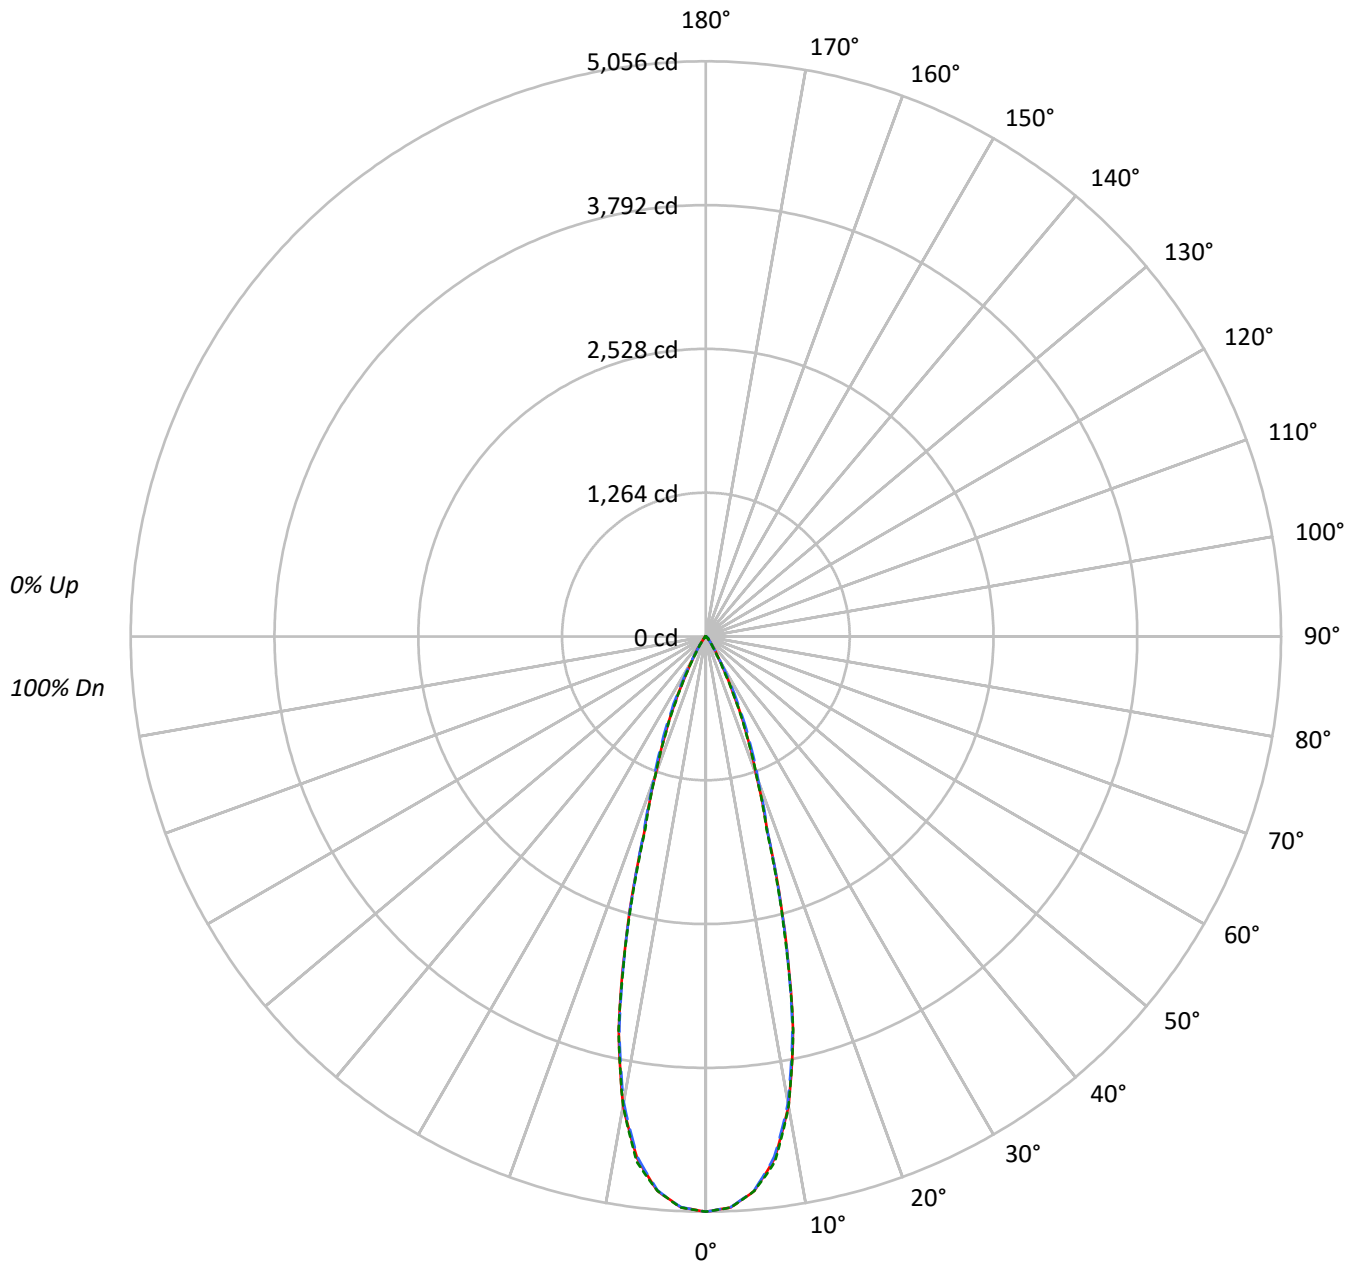

TEST NUMBER: P779878

CATALOG NUMBER: LER4D15D010-EC4DR300215IC9040-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	387003	387003	387003
5°	375888	375458	375911
10°	325579	323286	325501
15°	212428	211287	210225
20°	105632	109591	105485
25°	53207	60006	52118
30°	21301	23210	18561
35°	9886	9466	7933
40°	4267	4736	4017
45°	3009	3735	3042
50°	1036	2727	1096
55°	601	1121	627
60°	429	490	429
65°	272	272	272
70°	157	112	157
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 3735 cd/sqm



TEST NUMBER: P779878

CATALOG NUMBER: LER4D15D010-EC4DR300215IC9040-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	444.6	28.3
10°-20°	716.0	45.5
20°-30°	309.4	19.7
30°-40°	70.5	4.5
40°-50°	24.2	1.5
50°-60°	5.9	0.4
60°-70°	1.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1470.0	93.5
0°-40°	1540.6	98.0
0°-60°	1570.7	99.9
0°-90°	1572.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1572.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5056	5056	5056	5056	5056	
5°	4892	4887	4886	4897	4892	445
15°	2681	2648	2666	2658	2653	718
25°	630	654	710	637	617	302
35°	106	108	101	101	85	72
45°	28	34	34	34	28	20
55°	4	5	8	5	5	4
65°	2	2	2	2	2	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P779878

CATALOG NUMBER: LER4D15D010-EC4DR300215IC9040-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5056.0	5056.0	5056.0	5056.0	5056.0
2.5°	5022.5	5019.0	5021.0	5023.5	5024.4
5°	4892.1	4887.4	4886.5	4896.6	4892.4
7.5°	4629.3	4622.6	4612.4	4635.5	4657.1
10°	4188.9	4181.5	4159.4	4170.3	4187.9
12.5°	3538.8	3514.7	3514.2	3549.0	3544.3
15°	2680.7	2648.4	2666.3	2657.6	2652.9
17.5°	1802.7	1790.2	1814.1	1806.9	1775.9
20°	1296.8	1300.0	1345.4	1322.6	1295.0
22.5°	946.3	957.9	1011.8	953.0	931.4
25°	630.0	653.9	710.5	637.2	617.1
27.5°	387.5	398.4	455.7	382.5	371.6
30°	241.0	235.6	262.6	225.4	210.0
32.5°	158.1	151.2	159.9	143.5	131.1
35°	105.8	108.0	101.3	100.6	84.9
37.5°	66.0	76.0	67.0	71.5	54.6
40°	42.7	55.1	47.4	52.4	40.2
42.5°	35.0	42.5	39.0	41.5	35.8
45°	27.8	34.5	34.5	34.5	28.1
47.5°	15.4	23.1	29.6	23.6	16.4
50°	8.7	11.7	22.9	12.1	9.2
52.5°	6.0	6.7	15.6	6.9	6.2
55°	4.5	4.7	8.4	5.0	4.7
57.5°	3.5	3.7	4.5	3.7	3.5
60°	2.8	2.8	3.2	3.0	2.8
62.5°	2.0	2.0	2.2	2.0	2.0
65°	1.5	1.5	1.5	1.5	1.5
67.5°	0.7	1.0	1.0	1.0	1.0
70°	0.7	0.5	0.5	0.5	0.7
72.5°	0.5	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)