

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P780351

Luminaire Tested: LER4D20D010-EC4DR6520359030-4LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P780351
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D20D010-EC4DR6520359030-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1616.1 lumens
Efficiency: N/A
Efficacy: 70.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P780351

CATALOG NUMBER: LER4D20D010-EC4DR6520359030-4LBS1MW

Luminous Intensity Polar Plot

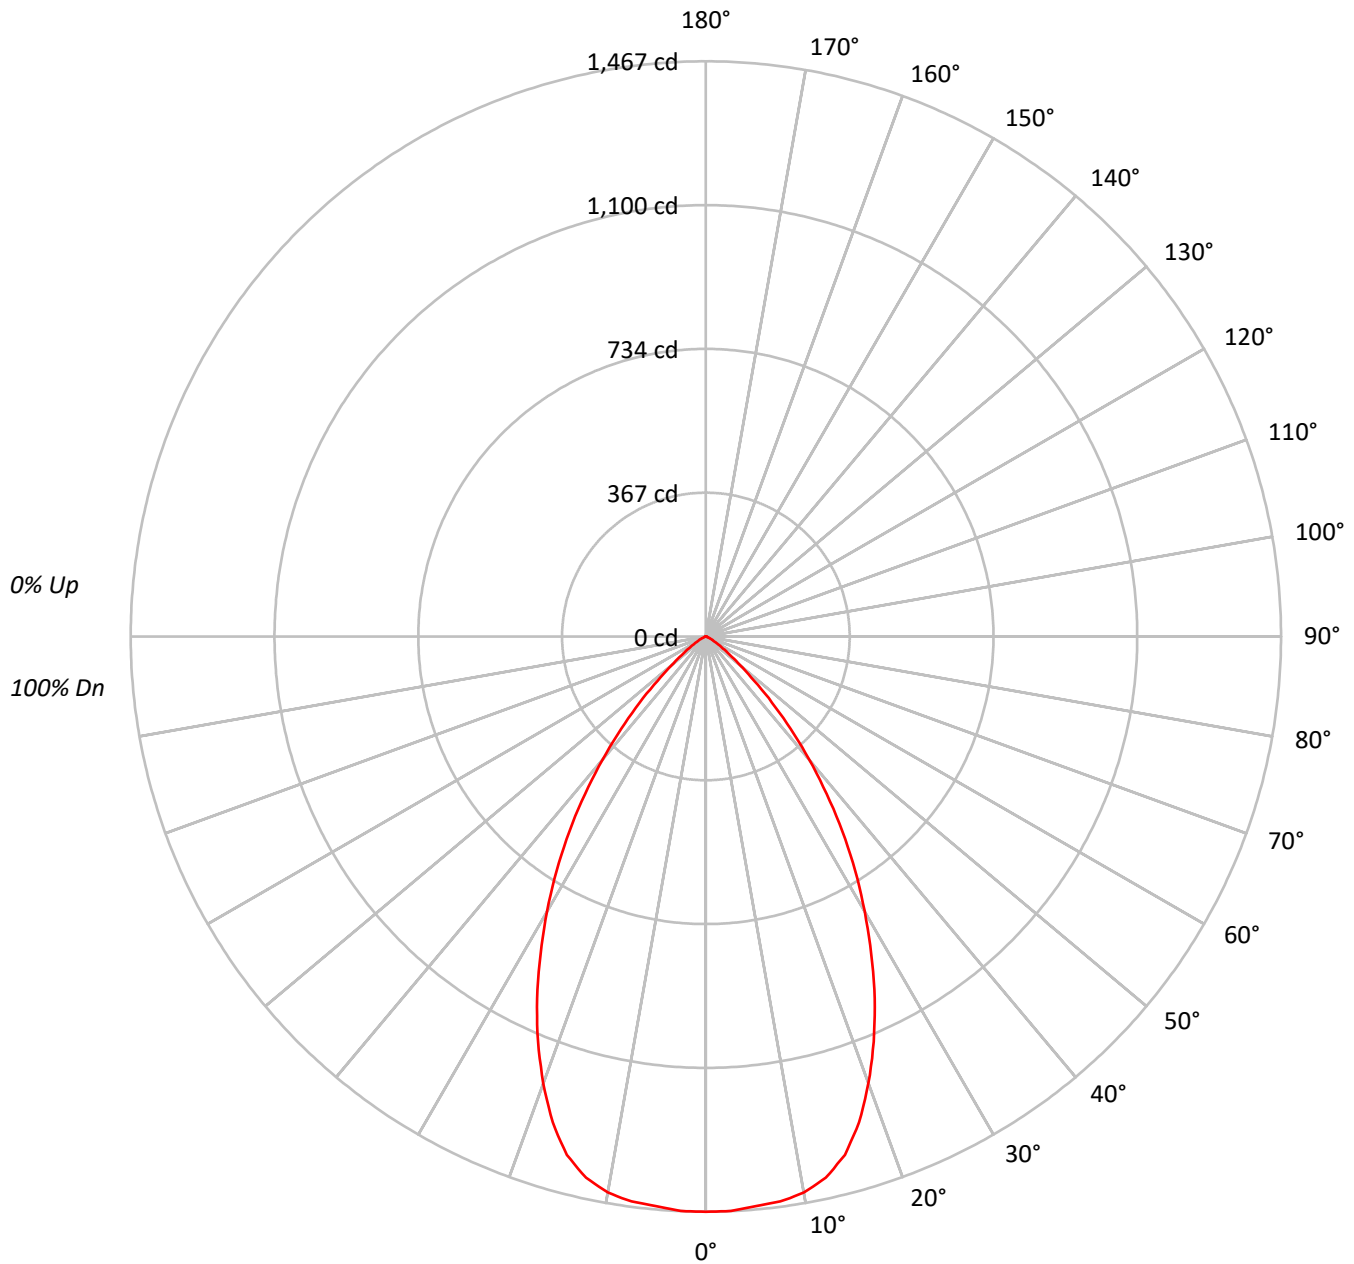

TEST NUMBER: P780351

CATALOG NUMBER: LER4D20D010-EC4DR6520359030-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	85702
5°	85490
10°	85411
15°	82781
20°	75359
25°	65672
30°	54619
35°	43278
40°	31236
45°	19732
50°	10285
55°	5468
60°	2873
65°	1575
70°	666
75°	722
80°	505
85°	402

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 19732 cd/sqm



TEST NUMBER: P780351

CATALOG NUMBER: LER4D20D010-EC4DR6520359030-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.8	8.6
10°-20°	380.0	23.5
20°-30°	464.5	28.7
30°-40°	376.9	23.3
40°-50°	187.8	11.6
50°-60°	52.4	3.2
60°-70°	11.9	0.7
70°-80°	3.1	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	983.3	60.8
0°-40°	1360.1	84.2
0°-60°	1600.3	99.0
0°-90°	1616.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1616.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1467	
5°	1458	139
15°	1369	380
25°	1019	464
35°	607	377
45°	239	188
55°	54	52
65°	11	12
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P780351

CATALOG NUMBER: LER4D20D010-EC4DR6520359030-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1467.4
2.5°	1466.4
5°	1458.2
7.5°	1453.4
10°	1440.2
12.5°	1413.5
15°	1369.1
17.5°	1299.6
20°	1212.5
22.5°	1118.5
25°	1019.1
27.5°	912.8
30°	809.9
32.5°	708.4
35°	607.0
37.5°	505.9
40°	409.7
42.5°	319.6
45°	238.9
47.5°	166.5
50°	113.2
52.5°	78.0
55°	53.7
57.5°	36.2
60°	24.6
62.5°	17.0
65°	11.4
67.5°	5.8
70°	3.9
72.5°	3.7
75°	3.2
77.5°	2.2
80°	1.5
82.5°	1.1
85°	0.6
87.5°	0.5
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)