

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P780486

Luminaire Tested: LER4D25D010-EC4DR3520359024-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P780486
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D25D010-EC4DR3520359024-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2194.6 lumens
Efficiency: N/A
Efficacy: 87.4 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P780486

CATALOG NUMBER: LER4D25D010-EC4DR3520359024-4LBS1LI

Luminous Intensity Polar Plot

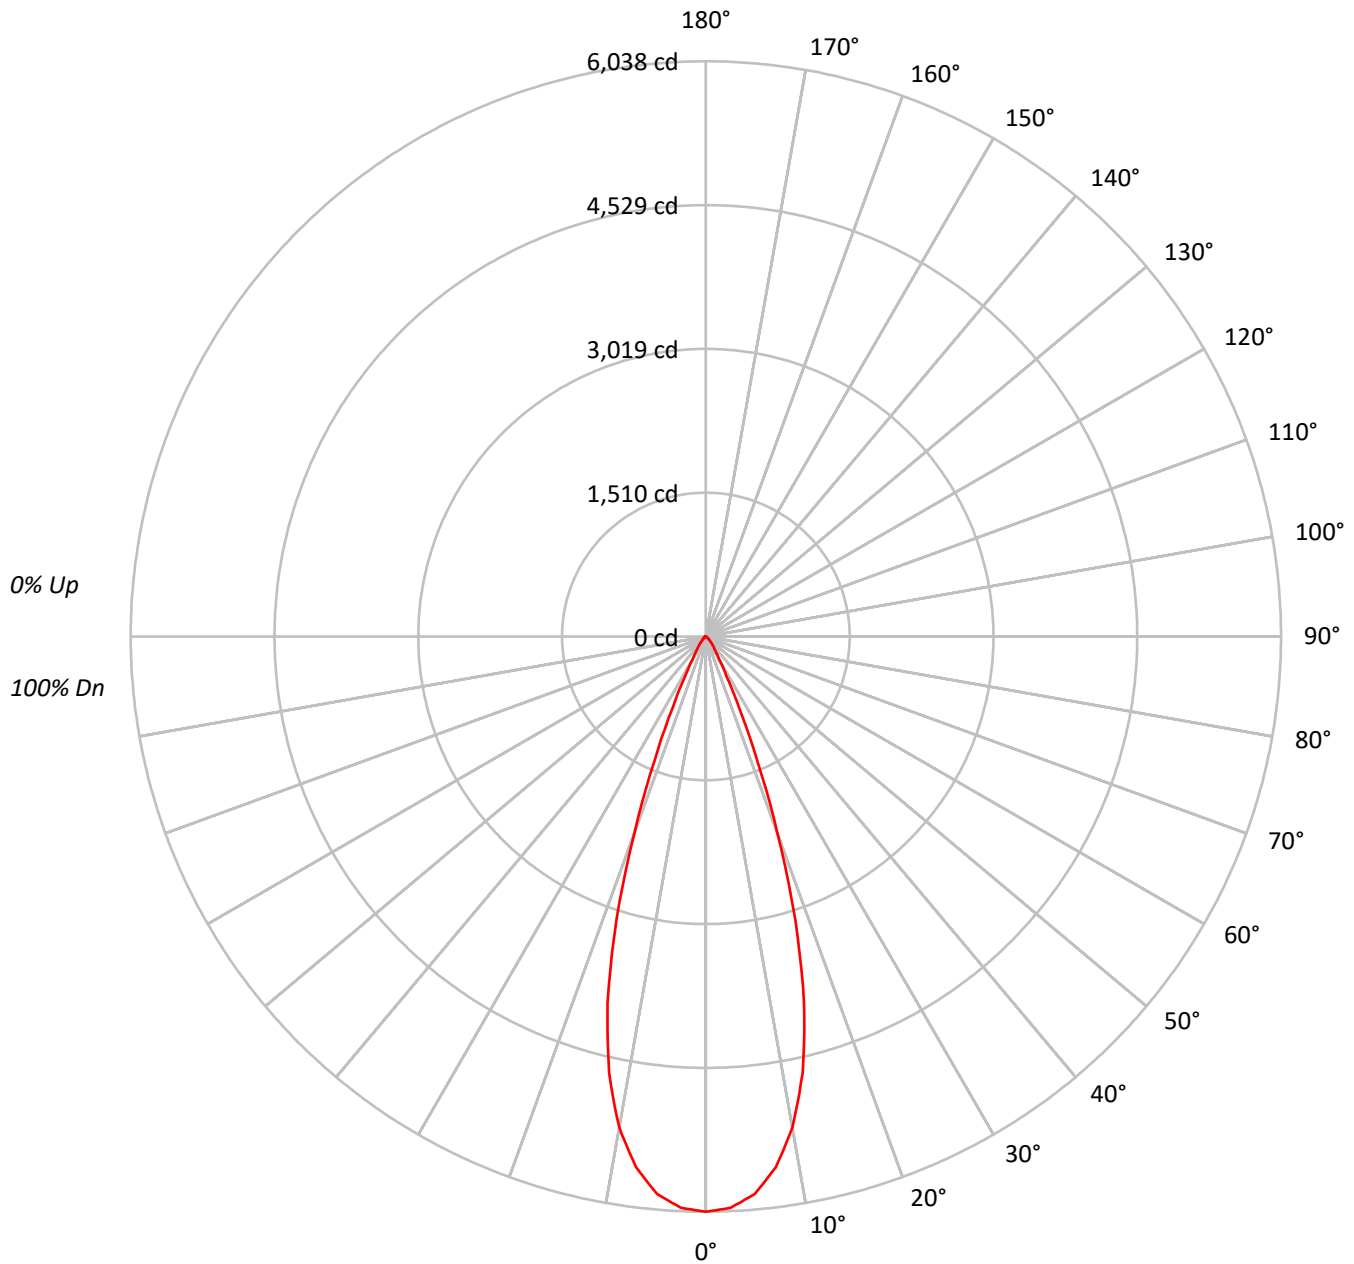



TEST NUMBER: P780486

CATALOG NUMBER: LER4D25D010-EC4DR3520359024-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	659771
5°	644271
10°	580660
15°	450684
20°	255626
25°	99447
30°	37105
35°	20341
40°	13293
45°	8097
50°	5150
55°	3638
60°	2666
65°	1448
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8097 cd/sqm



TEST NUMBER: P780486

CATALOG NUMBER: LER4D25D010-EC4DR3520359024-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	540.2	24.6
10°-20°	1054.8	48.1
20°-30°	430.2	19.6
30°-40°	103.0	4.7
40°-50°	42.9	2.0
50°-60°	17.8	0.8
60°-70°	5.5	0.3
70°-80°	0.1	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2025.2	92.3
0°-40°	2128.2	97.0
0°-60°	2188.9	99.7
0°-90°	2194.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2194.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6038	
5°	5874	540
15°	3984	1055
25°	825	430
35°	152	103
45°	52	43
55°	19	18
65°	6	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P780486

CATALOG NUMBER: LER4D25D010-EC4DR3520359024-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	6038.5
2.5°	6002.3
5°	5874.2
7.5°	5618.6
10°	5233.7
12.5°	4691.7
15°	3984.3
17.5°	3119.2
20°	2198.5
22.5°	1401.8
25°	824.9
27.5°	466.3
30°	294.1
32.5°	206.5
35°	152.5
37.5°	117.9
40°	93.2
42.5°	71.8
45°	52.4
47.5°	39.2
50°	30.3
52.5°	24.1
55°	19.1
57.5°	15.5
60°	12.2
62.5°	8.9
65°	5.6
67.5°	1.9
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)