

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781110

Luminaire Tested: LER4D35BD010-EC4DR5520359024-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P781110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D35BD010-EC4DR5520359024-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3094.9 lumens
Efficiency: N/A
Efficacy: 100.5 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781110

CATALOG NUMBER: LER4D35BD010-EC4DR5520359024-4LBS1LI

Luminous Intensity Polar Plot

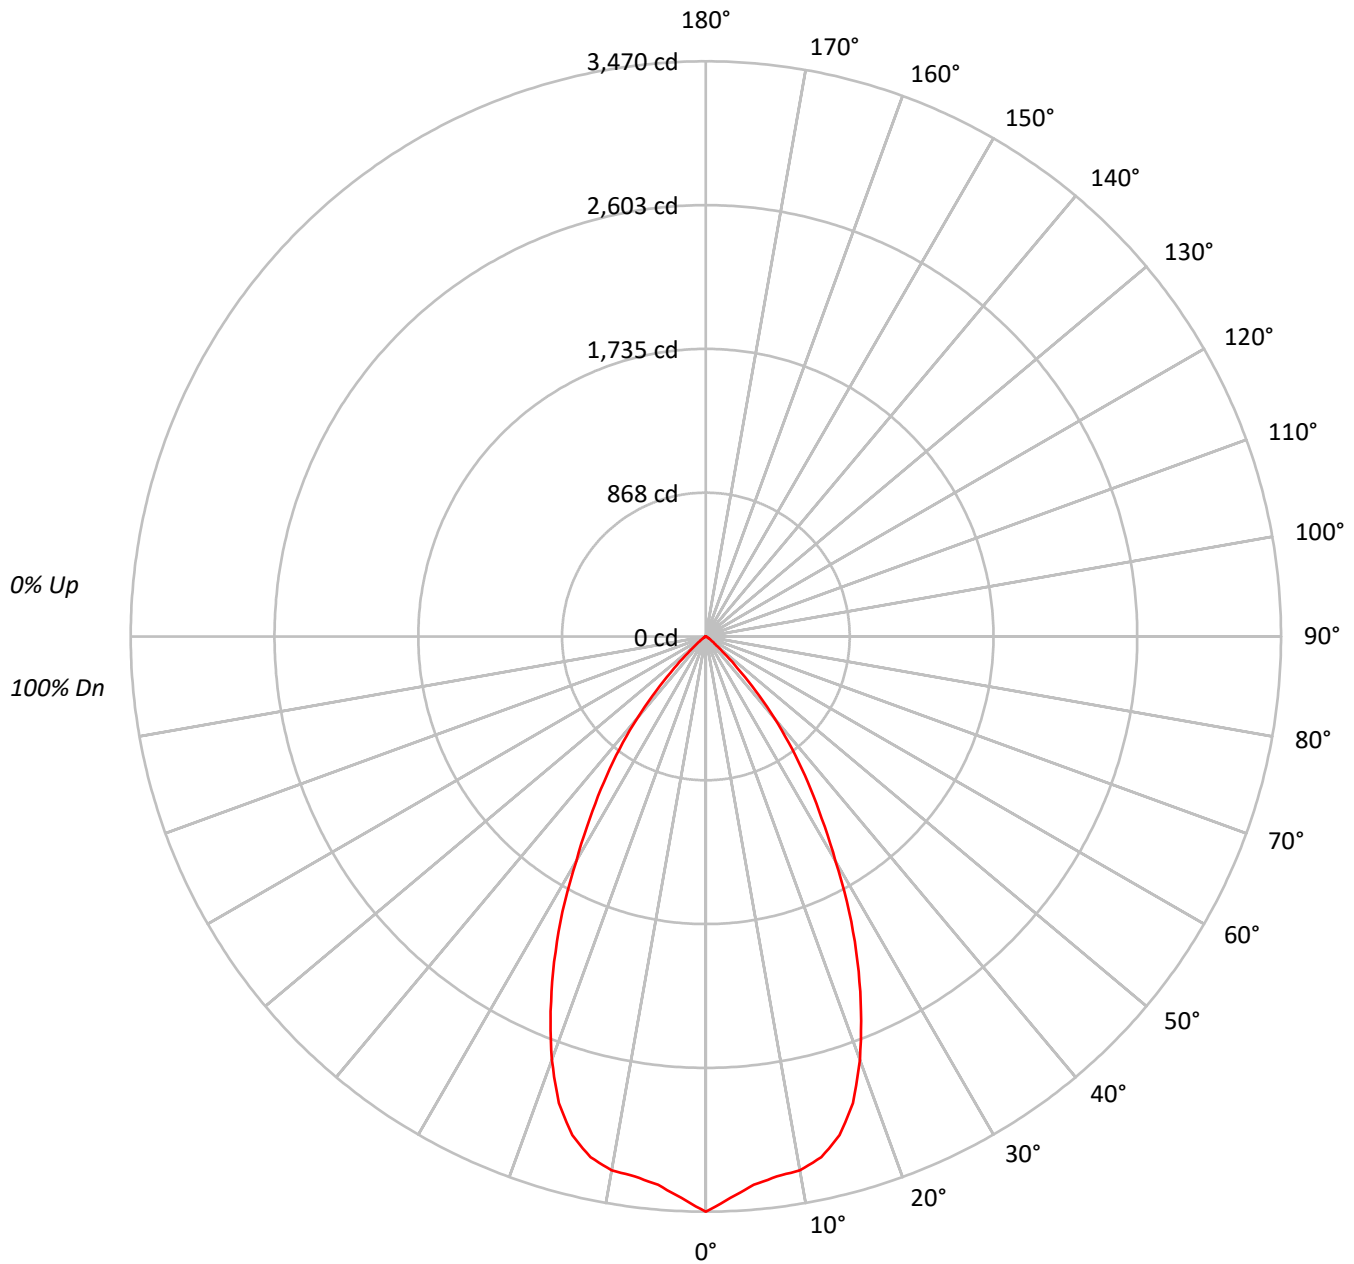



TEST NUMBER: P781110

CATALOG NUMBER: LER4D35BD010-EC4DR5520359024-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	92		95	93	90		92	90	89
3	102	96	91	87		100	95	90	86		92	88	85		90	86	84		87	85	82
4	97	90	84	80		95	88	83	79		86	82	78		84	81	78		82	79	77
5	92	84	78	74		91	83	77	73		81	76	73		79	75	72		78	74	71
6	88	79	73	68		86	78	72	68		76	71	68		75	70	67		74	70	67
7	83	74	68	64		82	73	67	63		72	67	63		71	66	63		70	65	62
8	79	69	63	59		78	69	63	59		68	63	59		67	62	59		66	62	58
9	75	66	60	56		74	65	59	55		64	59	55		63	58	55		62	58	55
10	72	62	56	52		71	61	56	52		61	56	52		60	55	52		59	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	379179
5°	364120
10°	362750
15°	352319
20°	315913
25°	261088
30°	197219
35°	143000
40°	91511
45°	41797
50°	13666
55°	5905
60°	2535
65°	336
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 41797 cd/sqm



TEST NUMBER: P781110

CATALOG NUMBER: LER4D35BD010-EC4DR5520359024-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	315.9	10.2
10°-20°	862.2	27.9
20°-30°	982.5	31.7
30°-40°	668.9	21.6
40°-50°	230.5	7.4
50°-60°	31.9	1.0
60°-70°	3.1	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2160.6	69.8
0°-40°	2829.5	91.4
0°-60°	3091.8	99.9
0°-90°	3094.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3094.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3470	
5°	3320	316
15°	3115	862
25°	2166	983
35°	1072	669
45°	270	230
55°	31	32
65°	1	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P781110

CATALOG NUMBER: LER4D35BD010-EC4DR5520359024-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3470.4
2.5°	3390.8
5°	3319.9
7.5°	3285.0
10°	3269.6
12.5°	3218.0
15°	3114.7
17.5°	2950.9
20°	2717.0
22.5°	2446.9
25°	2165.7
27.5°	1872.8
30°	1563.2
32.5°	1300.9
35°	1072.1
37.5°	854.5
40°	641.6
42.5°	444.7
45°	270.5
47.5°	145.8
50°	80.4
52.5°	47.7
55°	31.0
57.5°	19.8
60°	11.6
62.5°	5.2
65°	1.3
67.5°	0.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)