

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781398

Luminaire Tested: LER4D40BD010-EC4DR6540509024-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P781398
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D40BD010-EC4DR6540509024-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3121.9 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781398

CATALOG NUMBER: LER4D40BD010-EC4DR6540509024-4LBS1LI

Luminous Intensity Polar Plot

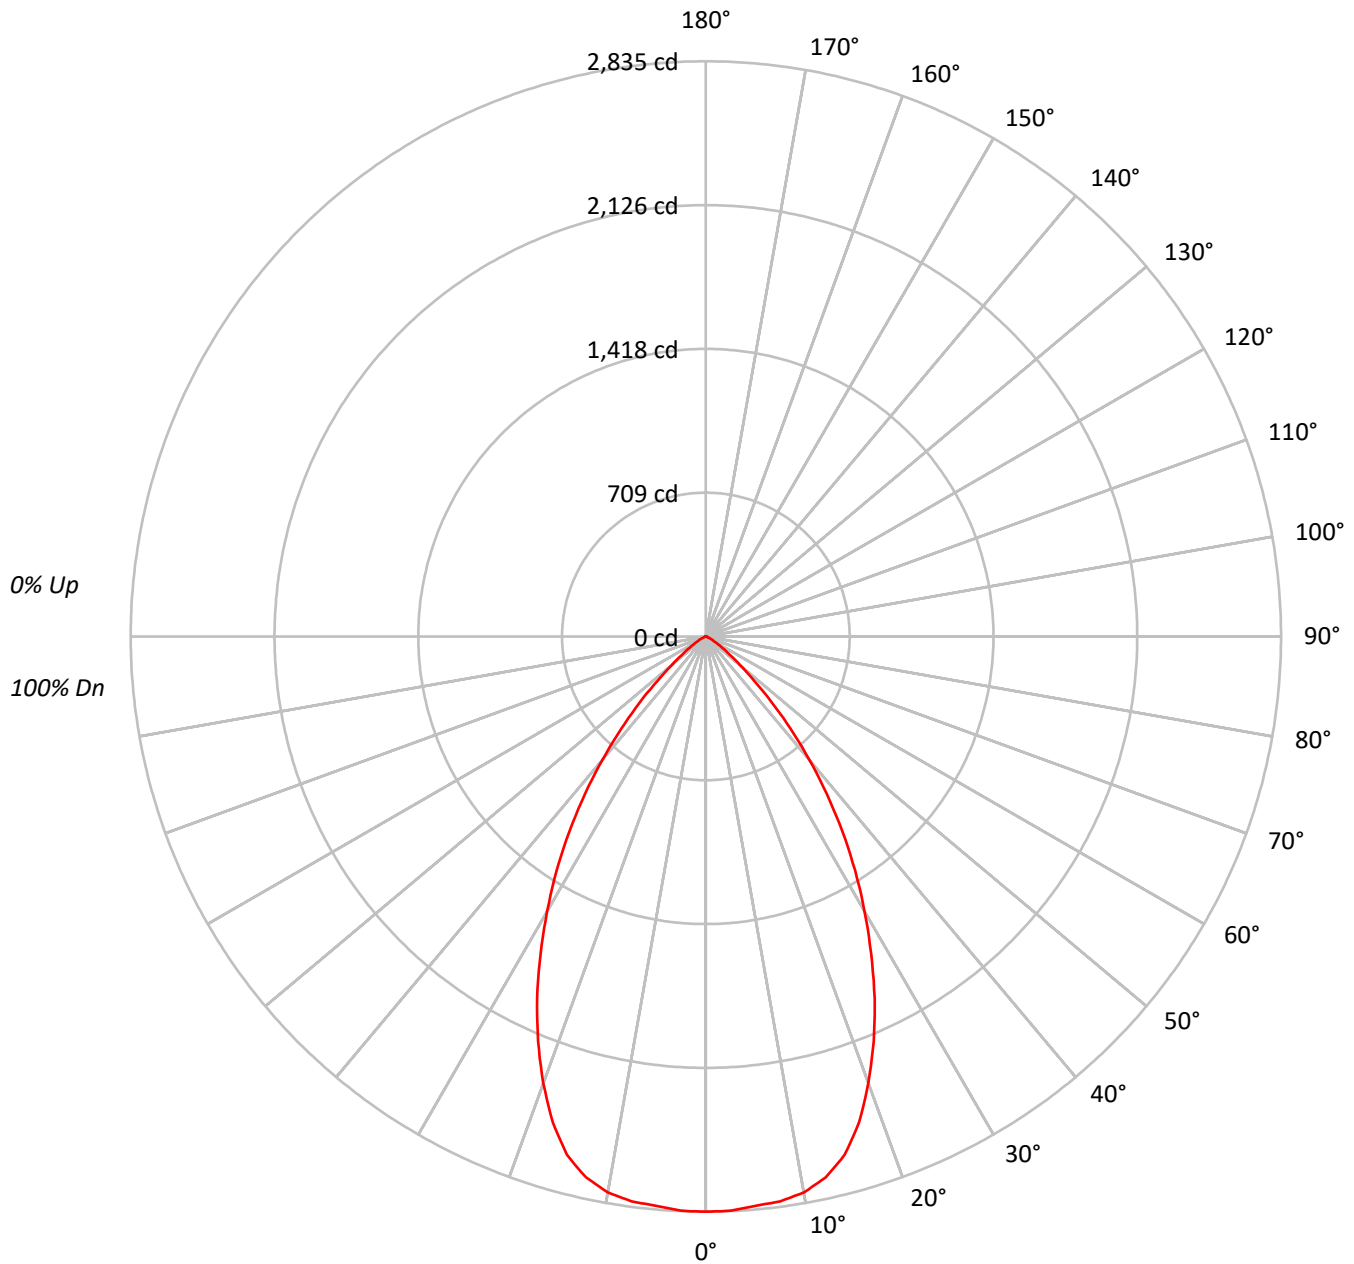



TEST NUMBER: P781398

CATALOG NUMBER: LER4D40BD010-EC4DR6540509024-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	165557
5°	165140
10°	164998
15°	159910
20°	145579
25°	126860
30°	105515
35°	83604
40°	60345
45°	38118
50°	19871
55°	10559
60°	5548
65°	3054
70°	1281
75°	1399
80°	975
85°	804

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 38118 cd/sqm



TEST NUMBER: P781398

CATALOG NUMBER: LER4D40BD010-EC4DR6540509024-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	268.1	8.6
10°-20°	734.1	23.5
20°-30°	897.3	28.7
30°-40°	728.0	23.3
40°-50°	362.8	11.6
50°-60°	101.2	3.2
60°-70°	23.0	0.7
70°-80°	6.0	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1899.4	60.8
0°-40°	2627.5	84.2
0°-60°	3091.5	99.0
0°-90°	3121.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3121.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2835	
5°	2817	268
15°	2645	734
25°	1969	897
35°	1173	728
45°	462	363
55°	104	101
65°	22	23
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P781398

CATALOG NUMBER: LER4D40BD010-EC4DR6540509024-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2834.7
2.5°	2832.6
5°	2816.8
7.5°	2807.6
10°	2782.2
12.5°	2730.5
15°	2644.7
17.5°	2510.6
20°	2342.3
22.5°	2160.7
25°	1968.6
27.5°	1763.3
30°	1564.6
32.5°	1368.4
35°	1172.6
37.5°	977.2
40°	791.5
42.5°	617.3
45°	461.5
47.5°	321.6
50°	218.7
52.5°	150.8
55°	103.7
57.5°	70.0
60°	47.5
62.5°	32.9
65°	22.1
67.5°	11.2
70°	7.5
72.5°	7.1
75°	6.2
77.5°	4.2
80°	2.9
82.5°	2.1
85°	1.2
87.5°	0.8
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)