

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781403

Luminaire Tested: LER4D40BD010-EC4DR6540509027-4LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P781403
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D40BD010-EC4DR6540509027-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3200.5 lumens
Efficiency: N/A
Efficacy: 90.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781403

CATALOG NUMBER: LER4D40BD010-EC4DR6540509027-4LBS1MW

Luminous Intensity Polar Plot

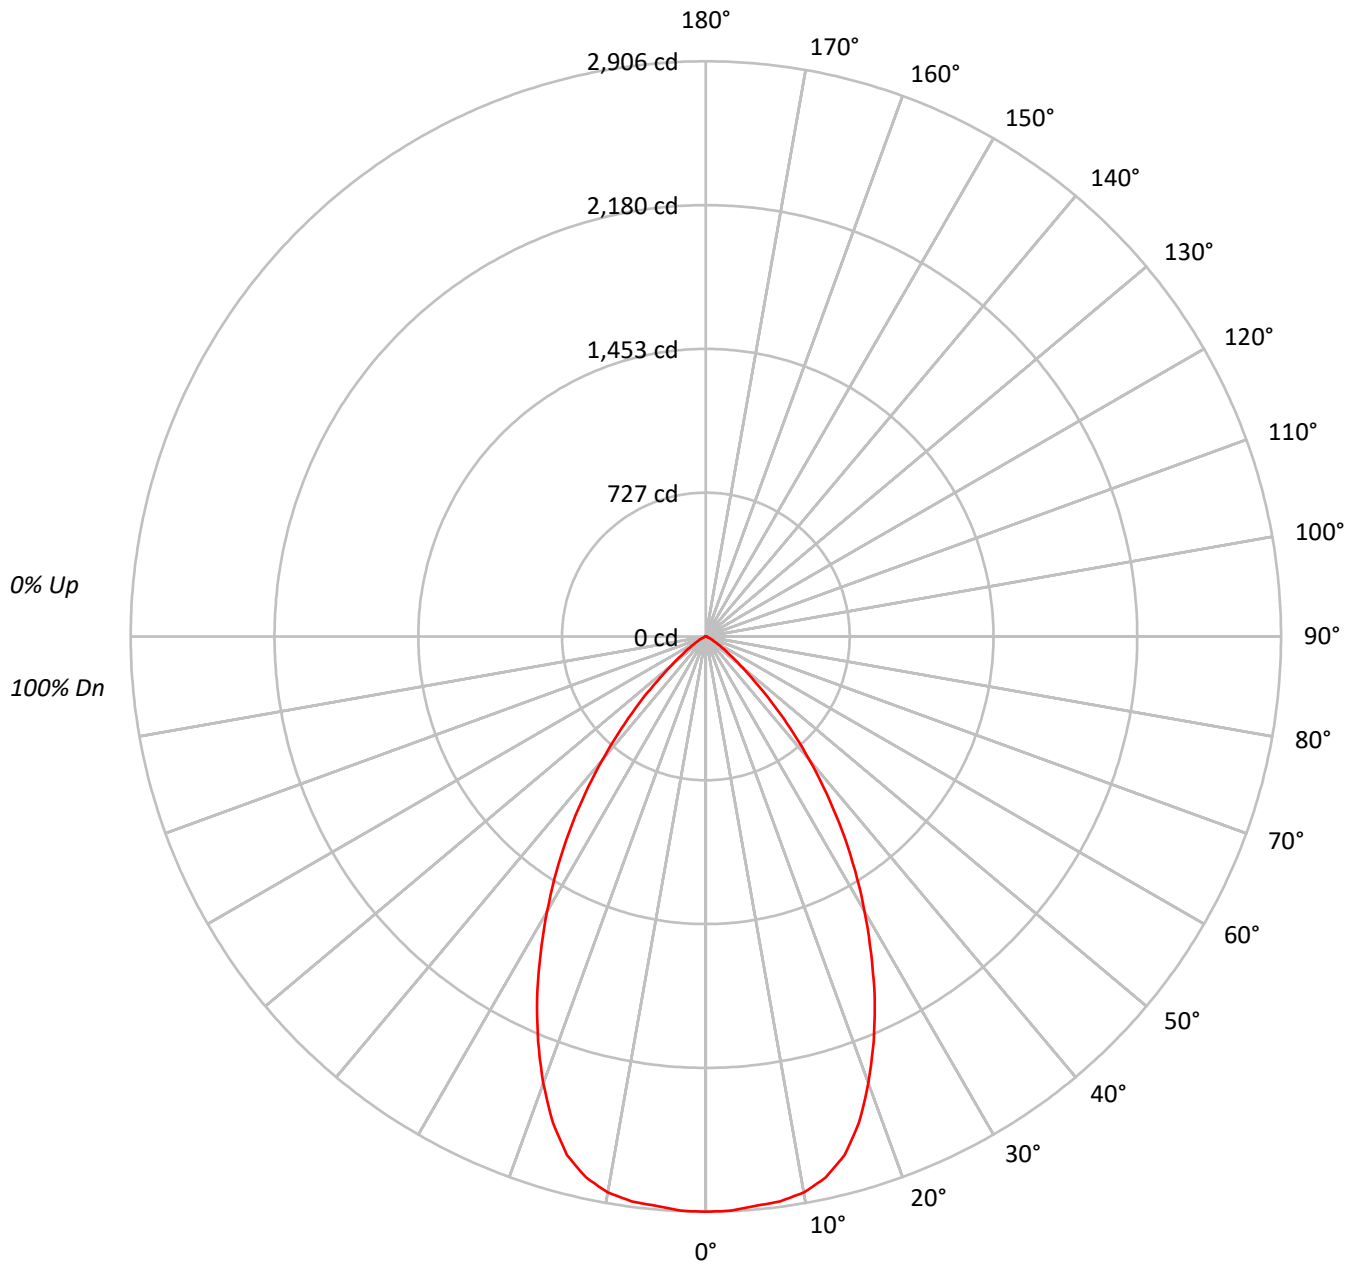



TEST NUMBER: P781403

CATALOG NUMBER: LER4D40BD010-EC4DR6540509027-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	169716
5°	169291
10°	169143
15°	163930
20°	149240
25°	130049
30°	108165
35°	85707
40°	61862
45°	39076
50°	20371
55°	10824
60°	5689
65°	3123
70°	1315
75°	1444
80°	1009
85°	871

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 39076 cd/sqm



TEST NUMBER: P781403

CATALOG NUMBER: LER4D40BD010-EC4DR6540509027-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	274.8	8.6
10°-20°	752.5	23.5
20°-30°	919.8	28.7
30°-40°	746.3	23.3
40°-50°	371.9	11.6
50°-60°	103.7	3.2
60°-70°	23.6	0.7
70°-80°	6.2	0.2
80°-90°	1.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1947.2	60.8
0°-40°	2693.5	84.2
0°-60°	3169.2	99.0
0°-90°	3200.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3200.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2906	
5°	2888	275
15°	2711	753
25°	2018	920
35°	1202	746
45°	473	372
55°	106	104
65°	23	24
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P781403

CATALOG NUMBER: LER4D40BD010-EC4DR6540509027-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2905.9
2.5°	2903.8
5°	2887.6
7.5°	2878.2
10°	2852.1
12.5°	2799.2
15°	2711.2
17.5°	2573.7
20°	2401.2
22.5°	2215.0
25°	2018.1
27.5°	1807.6
30°	1603.9
32.5°	1402.8
35°	1202.1
37.5°	1001.8
40°	811.4
42.5°	632.9
45°	473.1
47.5°	329.7
50°	224.2
52.5°	154.6
55°	106.3
57.5°	71.7
60°	48.7
62.5°	33.7
65°	22.6
67.5°	11.5
70°	7.7
72.5°	7.3
75°	6.4
77.5°	4.3
80°	3.0
82.5°	2.1
85°	1.3
87.5°	0.9
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)