

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781421

Luminaire Tested: LER4D40BD010-EC4DR7040509024-4LBS1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P781421
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D40BD010-EC4DR7040509024-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3425.2 lumens
Efficiency: N/A
Efficacy: 97.3 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781421

CATALOG NUMBER: LER4D40BD010-EC4DR7040509024-4LBS1H

Luminous Intensity Polar Plot

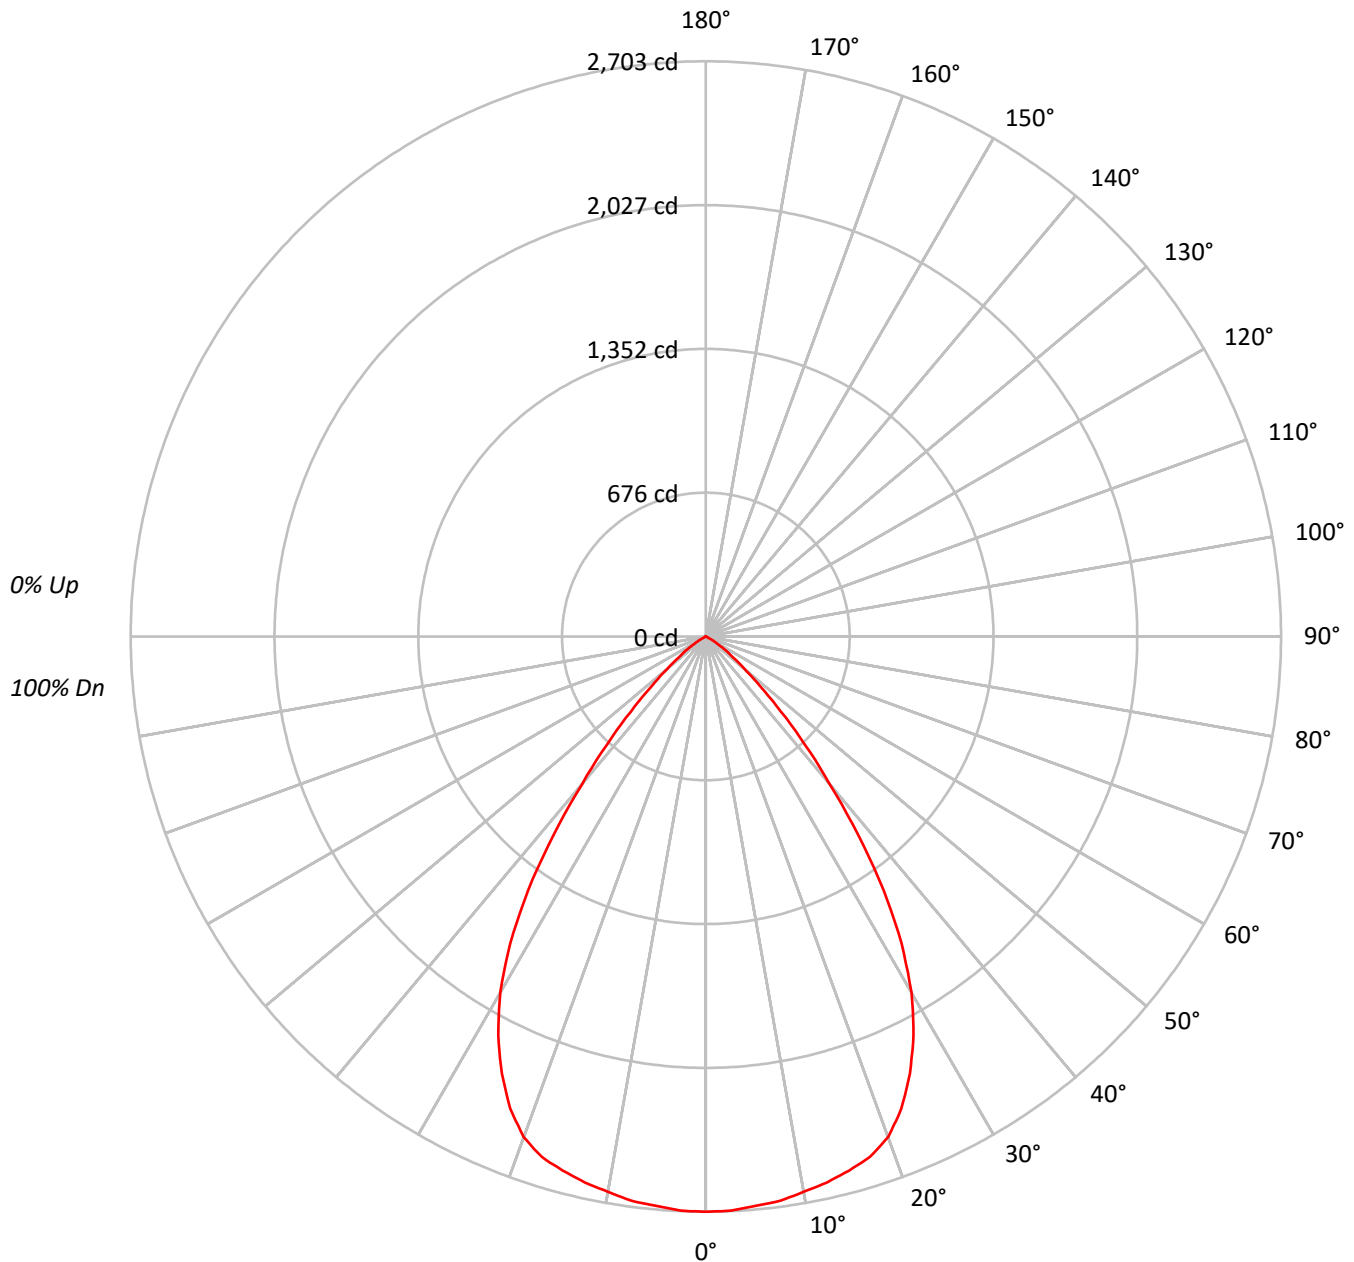



TEST NUMBER: P781421

CATALOG NUMBER: LER4D40BD010-EC4DR7040509024-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		111	108	106	103		104	102	100		100	99	97		97	95	94
2	107	102	97	94		105	100	96	92		97	93	90		94	91	88		91	89	87
3	101	94	88	84		99	92	87	83		90	85	82		87	84	81		85	82	79
4	95	87	81	76		93	86	80	76		83	78	75		81	77	74		79	76	73
5	89	80	74	69		88	79	73	69		78	72	68		76	71	68		74	70	67
6	84	75	68	63		83	74	68	63		72	67	63		71	66	62		69	65	62
7	80	69	63	58		78	69	62	58		67	62	58		66	61	57		65	61	57
8	75	65	58	54		74	64	58	54		63	57	53		62	57	53		61	56	53
9	71	61	54	50		70	60	54	50		59	53	50		58	53	49		57	53	49
10	67	57	50	46		66	56	50	46		55	50	46		55	50	46		54	49	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	295376
5°	294639
10°	294008
15°	293918
20°	291043
25°	273397
30°	243735
35°	194339
40°	129037
45°	77151
50°	39996
55°	21030
60°	7430
65°	129
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 77151 cd/sqm



TEST NUMBER: P781421

CATALOG NUMBER: LER4D40BD010-EC4DR7040509024-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.5	7.5
10°-20°	732.7	21.4
20°-30°	1033.6	30.2
30°-40°	892.3	26.1
40°-50°	399.6	11.7
50°-60°	104.6	3.1
60°-70°	6.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2021.8	59.0
0°-40°	2914.1	85.1
0°-60°	3418.3	99.8
0°-90°	3425.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3425.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2703	
5°	2686	255
15°	2598	733
25°	2268	1034
35°	1457	892
45°	499	400
55°	110	105
65°	0	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P781421

CATALOG NUMBER: LER4D40BD010-EC4DR7040509024-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	2703.4
2.5°	2700.5
5°	2686.4
7.5°	2674.7
10°	2650.0
12.5°	2627.6
15°	2598.4
17.5°	2564.9
20°	2503.1
22.5°	2401.5
25°	2267.8
27.5°	2112.8
30°	1931.9
32.5°	1710.7
35°	1457.0
37.5°	1176.9
40°	904.7
42.5°	687.4
45°	499.3
47.5°	344.2
50°	235.3
52.5°	162.4
55°	110.4
57.5°	66.6
60°	34.0
62.5°	10.7
65°	0.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)