

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781679

Luminaire Tested: LER4D45BD010-EC4DR7040509040-4LBS1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P781679
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D45BD010-EC4DR7040509040-4LBS1MW
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4397.9 lumens
Efficiency: N/A
Efficacy: 113.6 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781679

CATALOG NUMBER: LER4D45BD010-EC4DR7040509040-4LBS1MW

Luminous Intensity Polar Plot

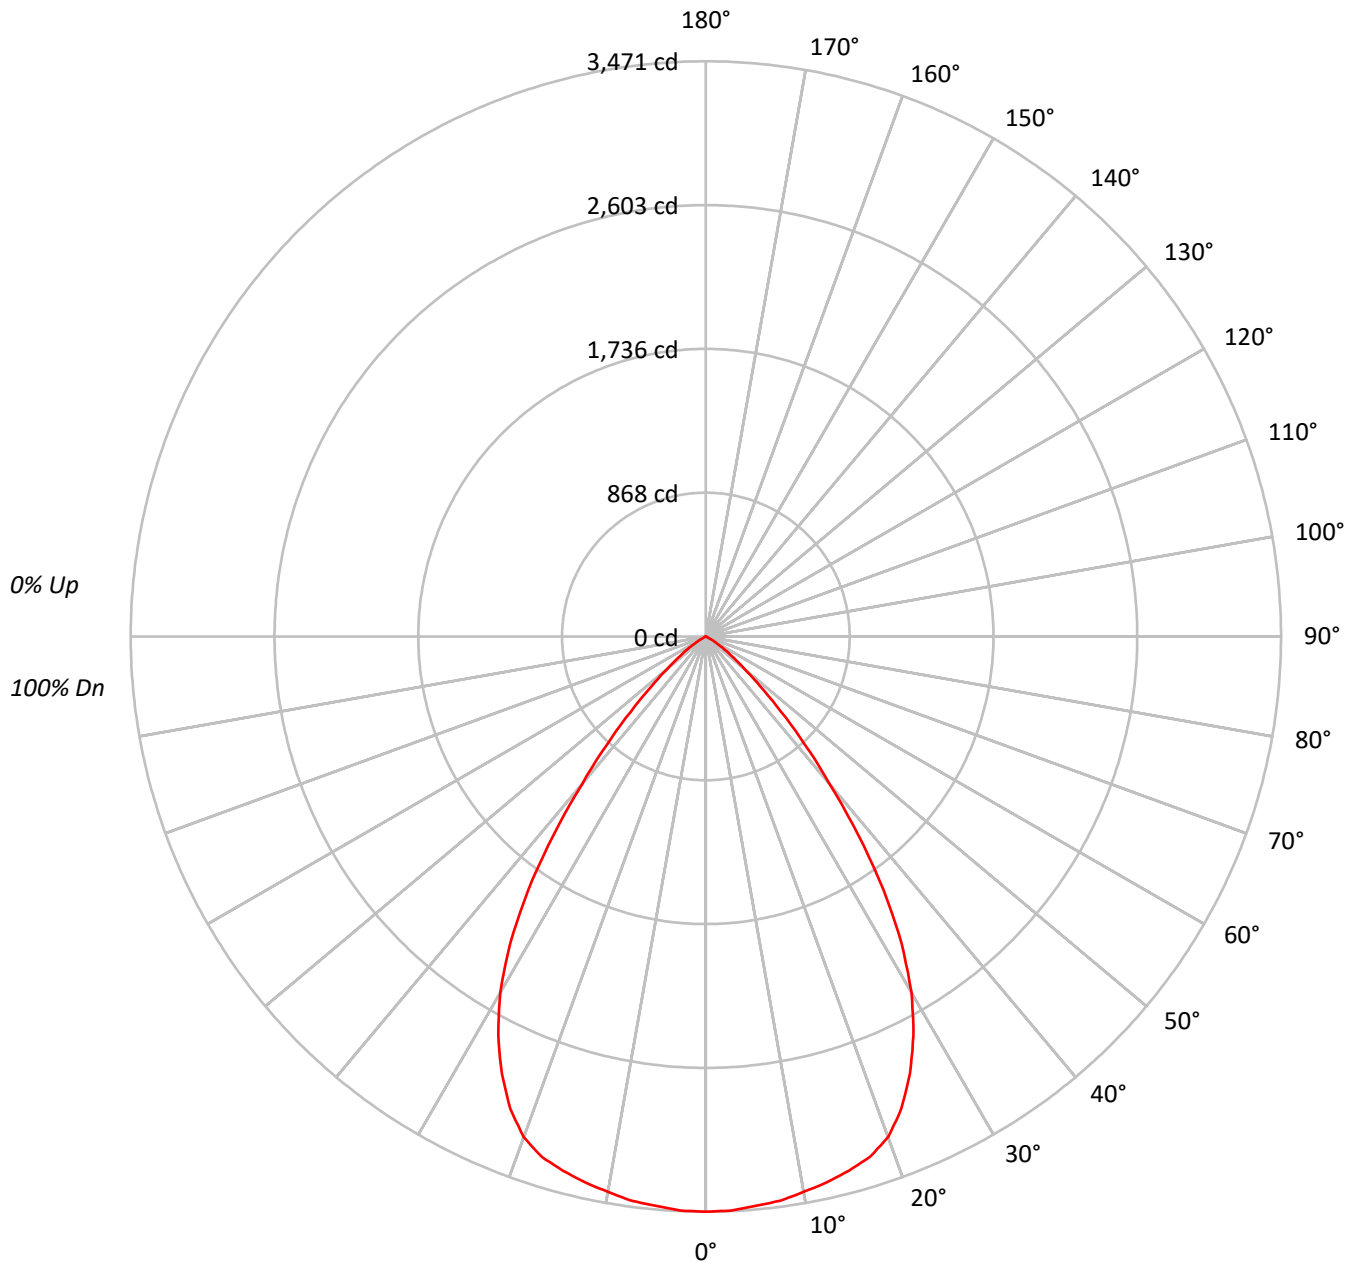



TEST NUMBER: P781679

CATALOG NUMBER: LER4D45BD010-EC4DR7040509040-4LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	83	78	75		81	77	74		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	84	75	68	63	83	74	68	63	72	67	63		71	66	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	58	54	74	64	58	54	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	53	50		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	379266
5°	378324
10°	377506
15°	377397
20°	373713
25°	351047
30°	312961
35°	249532
40°	165693
45°	99062
50°	51351
55°	26992
60°	9549
65°	155
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 99062 cd/sqm



TEST NUMBER: P781679

CATALOG NUMBER: LER4D45BD010-EC4DR7040509040-4LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	328.0	7.5
10°-20°	940.8	21.4
20°-30°	1327.2	30.2
30°-40°	1145.7	26.1
40°-50°	513.1	11.7
50°-60°	134.3	3.1
60°-70°	8.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2596.1	59.0
0°-40°	3741.8	85.1
0°-60°	4389.2	99.8
0°-90°	4397.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4397.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3471	
5°	3449	328
15°	3336	941
25°	2912	1327
35°	1871	1146
45°	641	513
55°	142	134
65°	1	9
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P781679

CATALOG NUMBER: LER4D45BD010-EC4DR7040509040-4LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3471.2
2.5°	3467.5
5°	3449.4
7.5°	3434.4
10°	3402.6
12.5°	3373.9
15°	3336.4
17.5°	3293.3
20°	3214.1
22.5°	3083.6
25°	2911.9
27.5°	2712.8
30°	2480.6
32.5°	2196.6
35°	1870.8
37.5°	1511.2
40°	1161.7
42.5°	882.6
45°	641.1
47.5°	441.9
50°	302.1
52.5°	208.5
55°	141.7
57.5°	85.5
60°	43.7
62.5°	13.7
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)