

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P781893

Luminaire Tested: LER4D50D010-EC4DR6540509040-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P781893
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4D50D010-EC4DR6540509040-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4721.8 lumens
Efficiency: N/A
Efficacy: 100.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P781893

CATALOG NUMBER: LER4D50D010-EC4DR6540509040-4LBS1H

Luminous Intensity Polar Plot

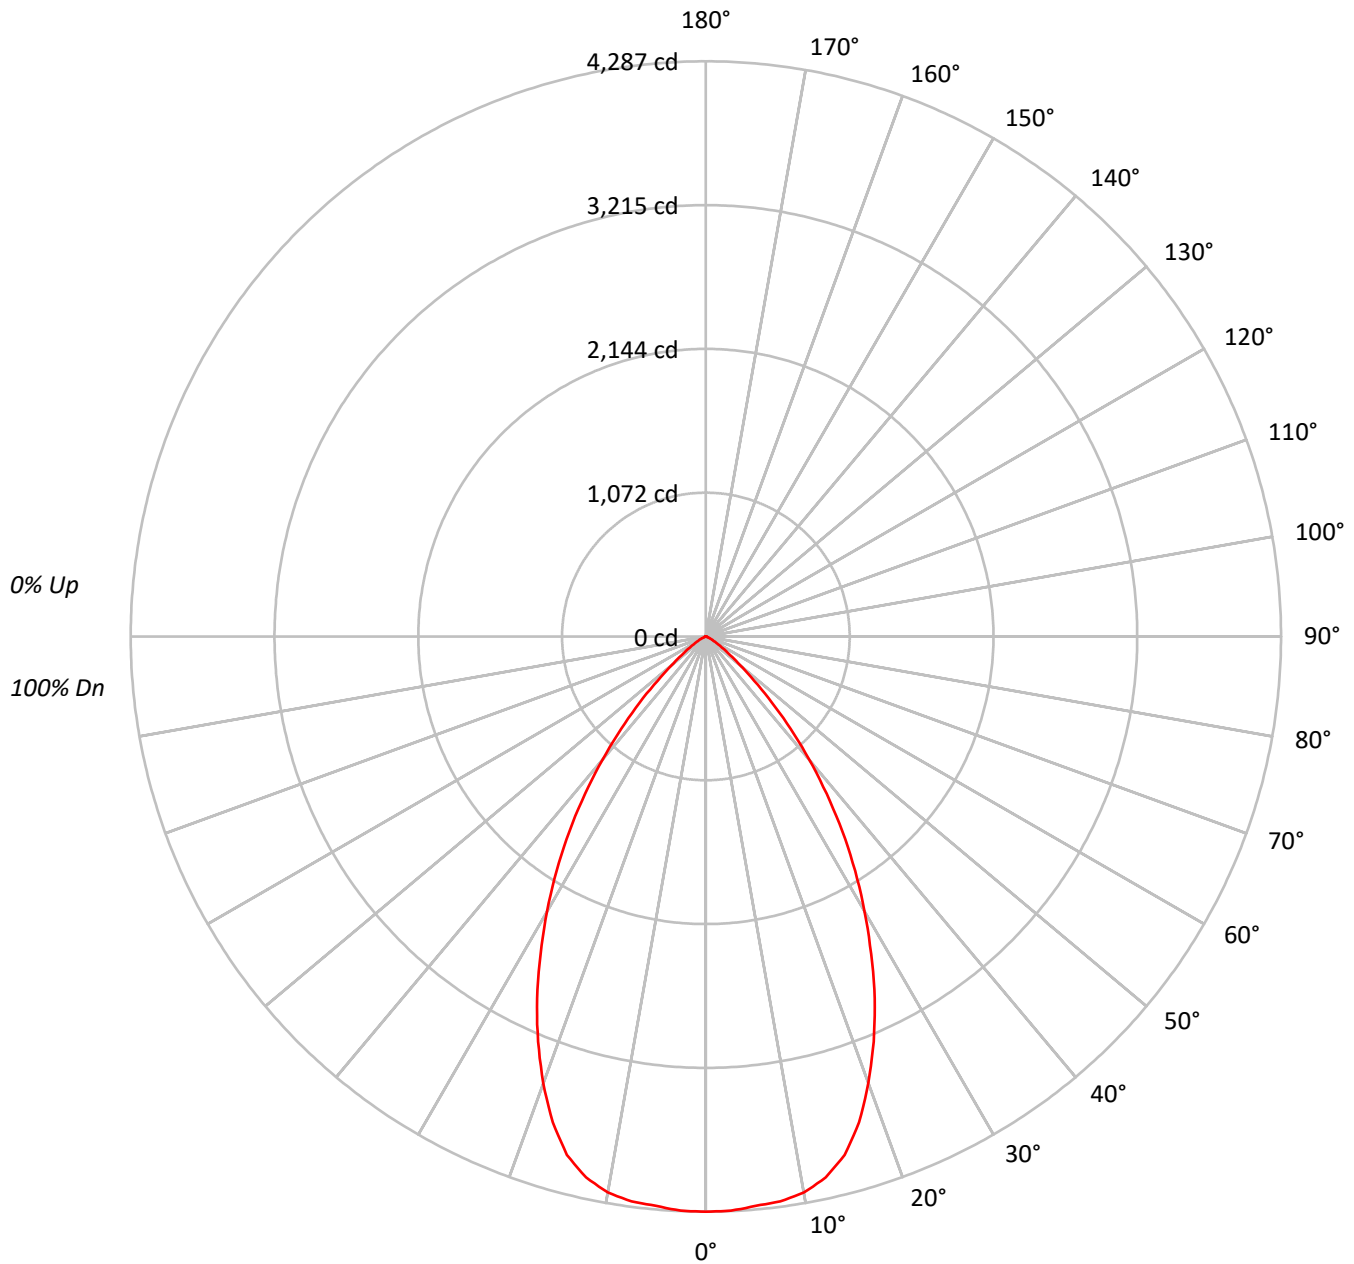



TEST NUMBER: P781893

CATALOG NUMBER: LER4D50D010-EC4DR6540509040-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93		
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85		
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78		
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72		
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66		
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61		
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56		
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52		
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49		
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	250389
5°	249757
10°	249543
15°	241850
20°	220174
25°	191868
30°	159581
35°	126447
40°	91260
45°	57652
50°	30057
55°	15976
60°	8387
65°	4616
70°	1930
75°	2144
80°	1480
85°	1273

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 57652 cd/sqm



TEST NUMBER: P781893

CATALOG NUMBER: LER4D50D010-EC4DR6540509040-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	405.4	8.6
10°-20°	1110.2	23.5
20°-30°	1357.1	28.7
30°-40°	1101.1	23.3
40°-50°	548.7	11.6
50°-60°	153.1	3.2
60°-70°	34.8	0.7
70°-80°	9.1	0.2
80°-90°	2.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2872.7	60.8
0°-40°	3973.8	84.2
0°-60°	4675.6	99.0
0°-90°	4721.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4721.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4287	
5°	4260	405
15°	4000	1110
25°	2977	1357
35°	1774	1101
45°	698	549
55°	157	153
65°	33	35
75°	10	9
85°	2	2
90°	0	



TEST NUMBER: P781893

CATALOG NUMBER: LER4D50D010-EC4DR6540509040-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4287.2
2.5°	4284.0
5°	4260.1
7.5°	4246.2
10°	4207.8
12.5°	4129.7
15°	3999.9
17.5°	3797.0
20°	3542.5
22.5°	3267.8
25°	2977.4
27.5°	2666.8
30°	2366.3
32.5°	2069.6
35°	1773.5
37.5°	1478.0
40°	1197.0
42.5°	933.7
45°	698.0
47.5°	486.4
50°	330.8
52.5°	228.1
55°	156.9
57.5°	105.8
60°	71.8
62.5°	49.8
65°	33.4
67.5°	17.0
70°	11.3
72.5°	10.7
75°	9.5
77.5°	6.3
80°	4.4
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)