

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784428

Luminaire Tested: LER4DD35BD010-EC4DR3520359030-4LBDP1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P784428  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER4DD35BD010-EC4DR3520359030-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2642.1 lumens  
Efficiency: N/A  
Efficacy: 85.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 30.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P784428  
CATALOG NUMBER: LER4DD35BD010-EC4DR3520359030-4LBDP1B

### Luminous Intensity Polar Plot

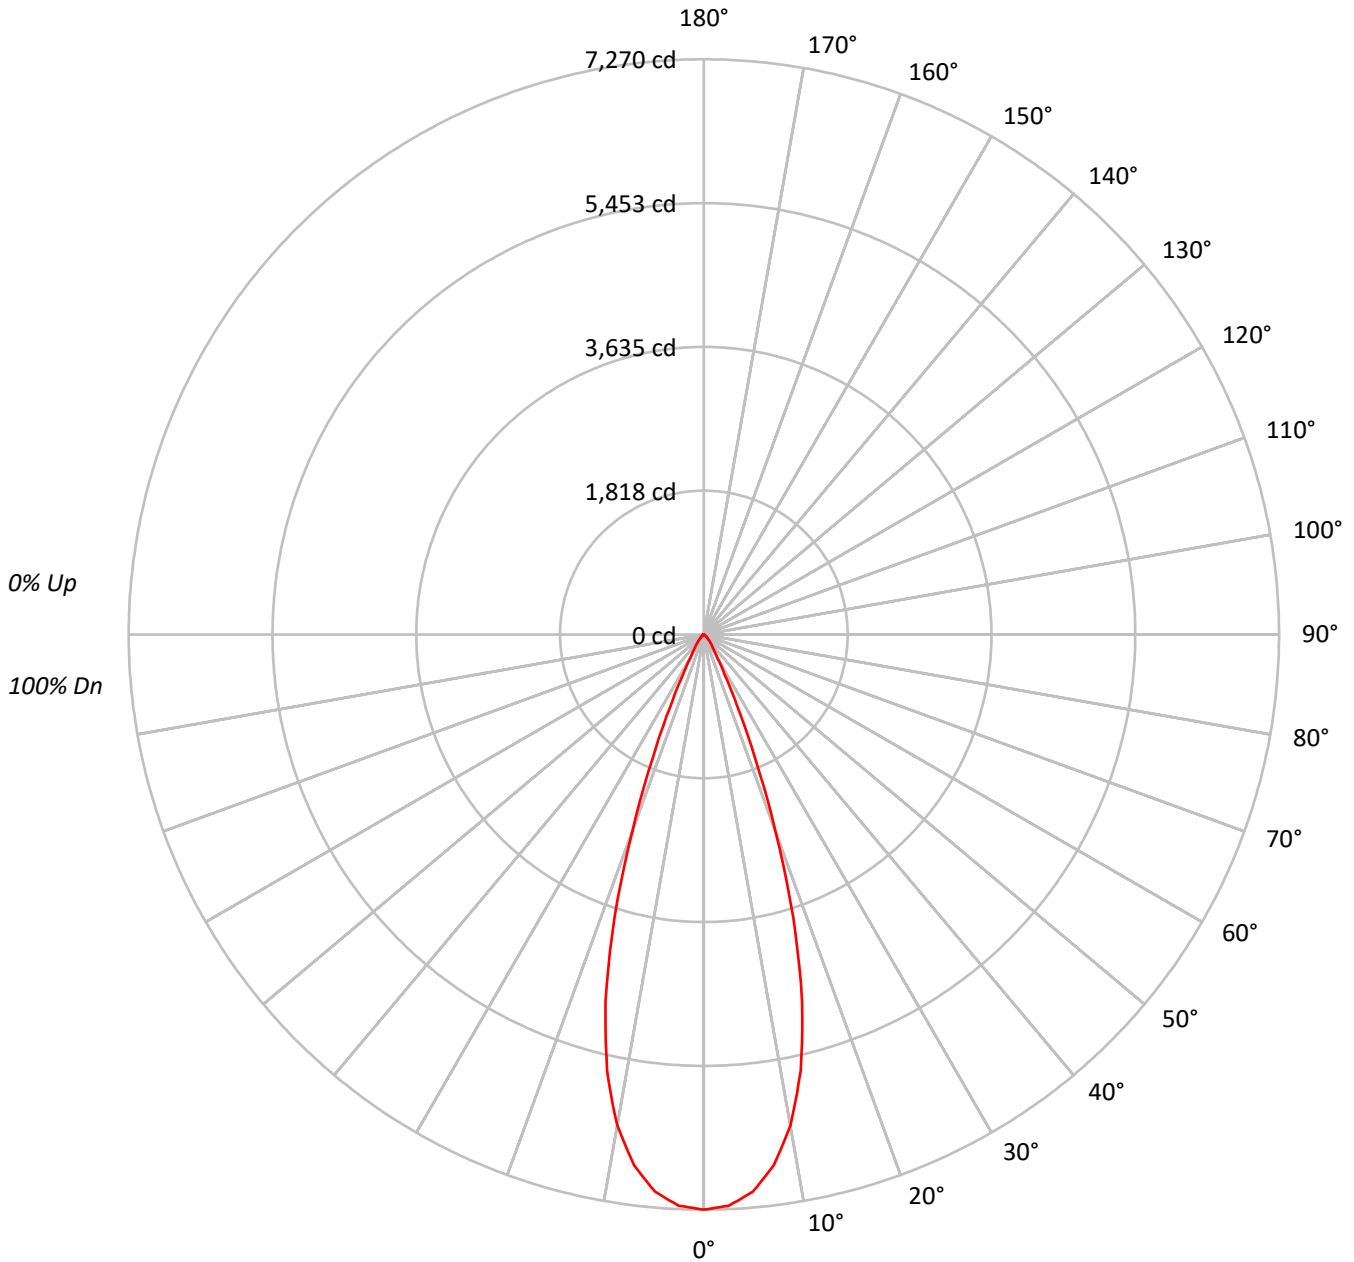



TEST NUMBER: P784428

CATALOG NUMBER: LER4DD35BD010-EC4DR3520359030-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96																
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88																
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84																
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81																
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78																
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75																
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72																
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70																
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	794282
5°	775611
10°	699039
15°	542568
20°	307728
25°	119724
30°	44662
35°	24489
40°	16003
45°	9735
50°	6204
55°	4381
60°	3212
65°	1732
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 9735 cd/sqm



TEST NUMBER: P784428

CATALOG NUMBER: LER4DD35BD010-EC4DR3520359030-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	650.4	24.6
10°-20°	1269.8	48.1
20°-30°	517.9	19.6
30°-40°	123.9	4.7
40°-50°	51.6	2.0
50°-60°	21.4	0.8
60°-70°	6.7	0.3
70°-80°	0.2	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2438.1	92.3
0°-40°	2562.1	97.0
0°-60°	2635.1	99.7
0°-90°	2642.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2642.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7270	
5°	7072	650
15°	4797	1270
25°	993	518
35°	184	124
45°	63	52
55°	23	21
65°	7	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784428

CATALOG NUMBER: LER4DD35BD010-EC4DR3520359030-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7269.6
2.5°	7226.0
5°	7071.7
7.5°	6764.1
10°	6300.7
12.5°	5648.1
15°	4796.6
17.5°	3755.1
20°	2646.6
22.5°	1687.7
25°	993.1
27.5°	561.4
30°	354.0
32.5°	248.6
35°	183.6
37.5°	141.9
40°	112.2
42.5°	86.4
45°	63.0
47.5°	47.2
50°	36.5
52.5°	28.9
55°	23.0
57.5°	18.6
60°	14.7
62.5°	10.7
65°	6.7
67.5°	2.4
70°	0.4
72.5°	0.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.4
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)