

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784479

Luminaire Tested: LER4DD35BD010-EC4DR4520359030-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784479
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD35BD010-EC4DR4520359030-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3097.3 lumens
Efficiency: N/A
Efficacy: 100.6 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784479

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359030-4LBDP1MW

Luminous Intensity Polar Plot

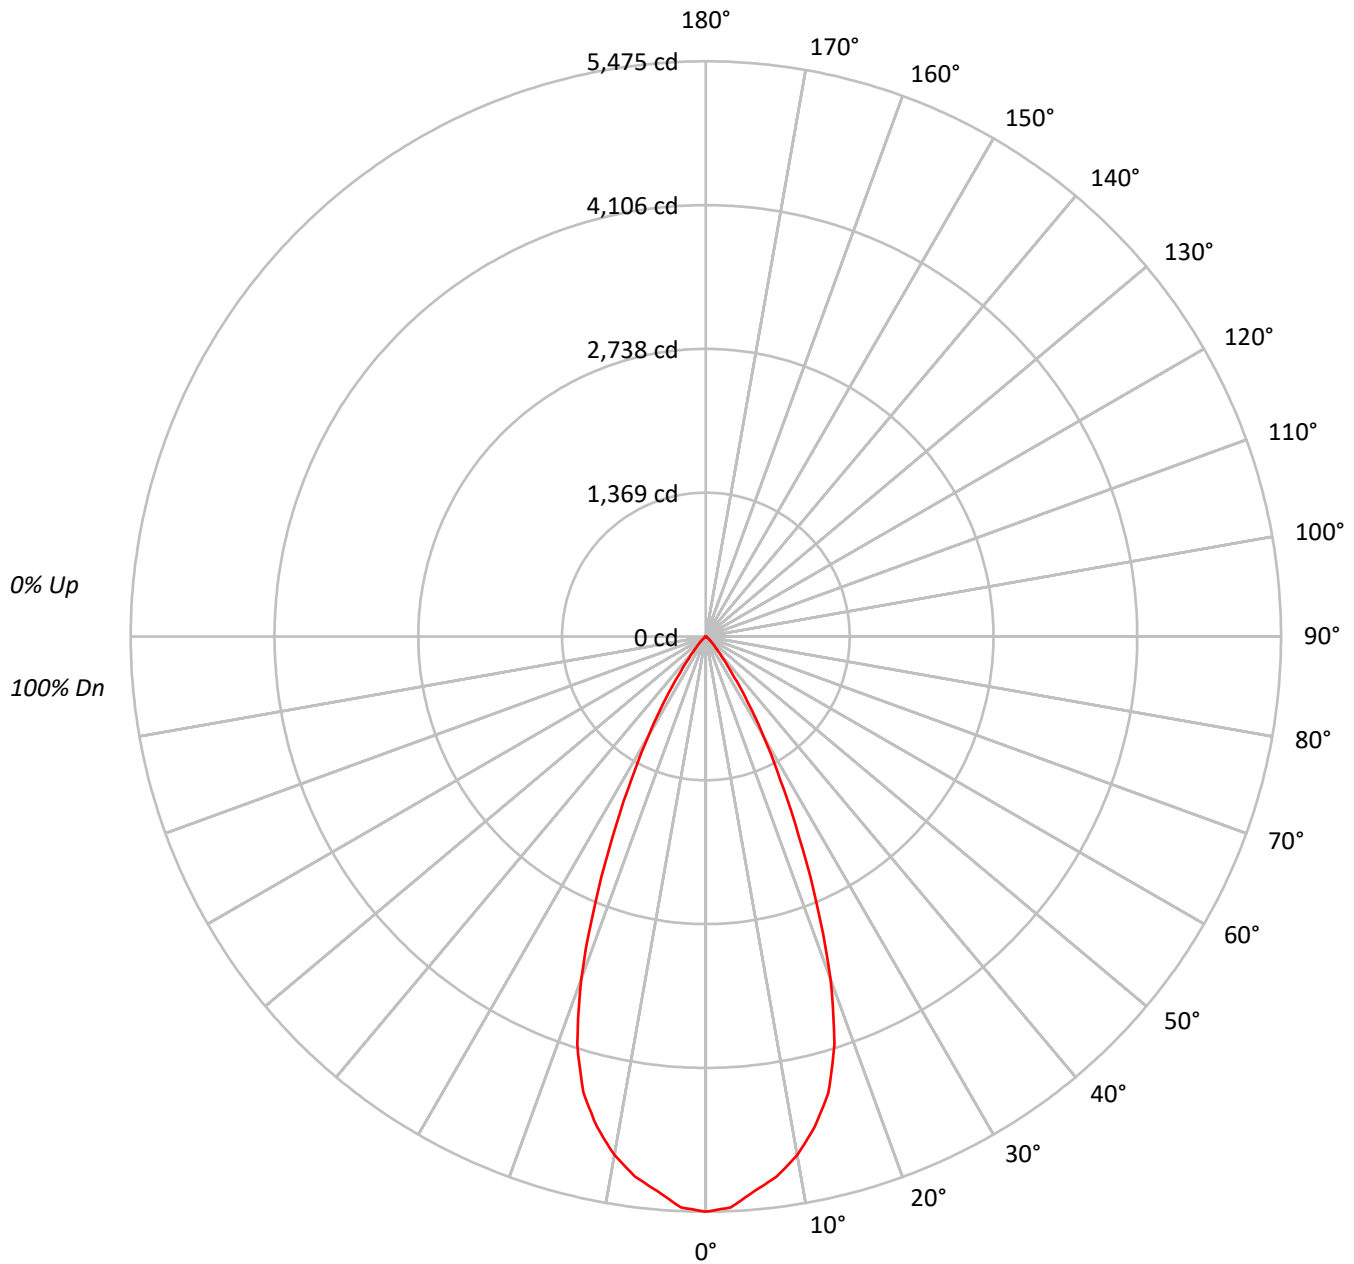



TEST NUMBER: P784479

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359030-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	598159
5°	581129
10°	555985
15°	508848
20°	403688
25°	252034
30°	138906
35°	62370
40°	24561
45°	11573
50°	5490
55°	2876
60°	1420
65°	336
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11573 cd/sqm



TEST NUMBER: P784479

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359030-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	497.8	16.1
10°-20°	1225.3	39.6
20°-30°	970.3	31.3
30°-40°	323.1	10.4
40°-50°	64.1	2.1
50°-60°	14.6	0.5
60°-70°	2.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2693.4	87.0
0°-40°	3016.5	97.4
0°-60°	3095.2	99.9
0°-90°	3097.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3097.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5475	
5°	5298	498
15°	4498	1225
25°	2091	970
35°	468	323
45°	75	64
55°	15	15
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784479

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359030-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	5474.6
2.5°	5438.9
5°	5298.5
7.5°	5182.7
10°	5011.3
12.5°	4783.1
15°	4498.5
17.5°	4070.4
20°	3471.9
22.5°	2758.8
25°	2090.6
27.5°	1530.8
30°	1101.0
32.5°	748.8
35°	467.6
37.5°	277.3
40°	172.2
42.5°	113.2
45°	74.9
47.5°	48.2
50°	32.3
52.5°	21.5
55°	15.1
57.5°	9.9
60°	6.5
62.5°	3.4
65°	1.3
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)