

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784480

Luminaire Tested: LER4DD35BD010-EC4DR4520359035-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784480
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD35BD010-EC4DR4520359035-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2915.5 lumens
Efficiency: N/A
Efficacy: 94.7 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784480

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359035-4LBDP1B

Luminous Intensity Polar Plot

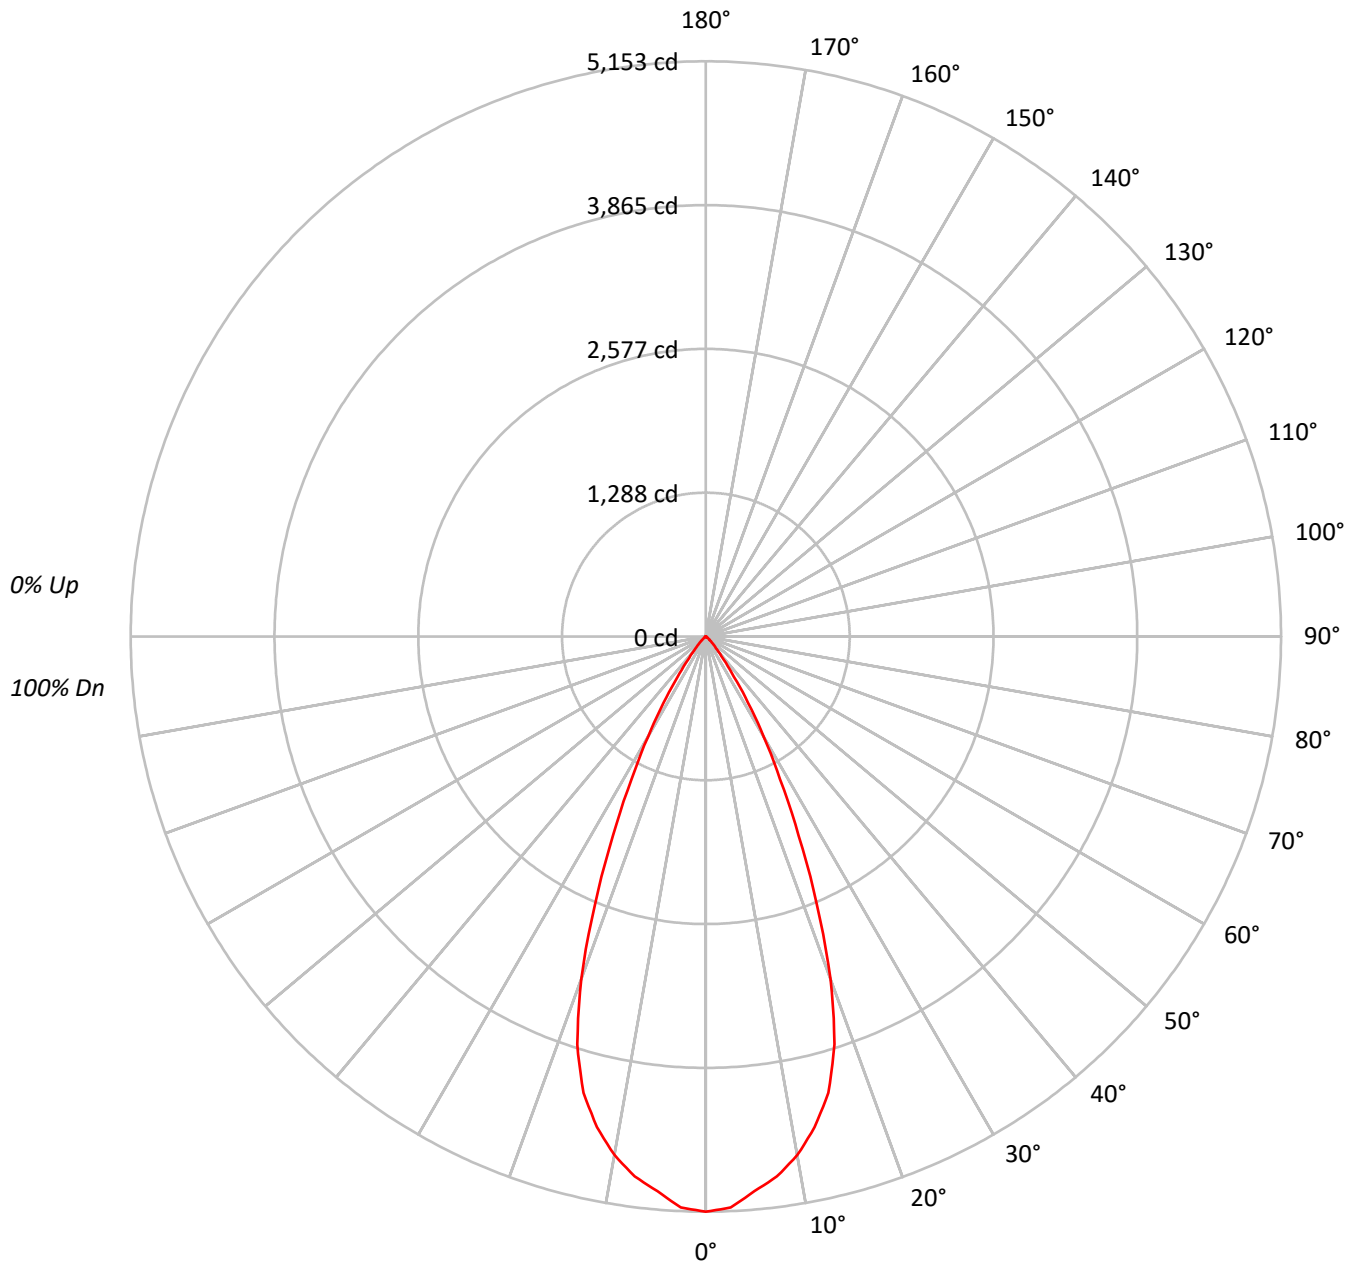



TEST NUMBER: P784480

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359035-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	563053
5°	547020
10°	523356
15°	478974
20°	379991
25°	237242
30°	130756
35°	58715
40°	23120
45°	10894
50°	5167
55°	2705
60°	1333
65°	310
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10894 cd/sqm



TEST NUMBER: P784480

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359035-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	468.6	16.1
10°-20°	1153.3	39.6
20°-30°	913.3	31.3
30°-40°	304.1	10.4
40°-50°	60.4	2.1
50°-60°	13.7	0.5
60°-70°	2.0	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2535.3	87.0
0°-40°	2839.4	97.4
0°-60°	2913.5	99.9
0°-90°	2915.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2915.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5153	
5°	4988	469
15°	4234	1153
25°	1968	913
35°	440	304
45°	70	60
55°	14	14
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784480

CATALOG NUMBER: LER4DD35BD010-EC4DR4520359035-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	5153.3
2.5°	5119.7
5°	4987.5
7.5°	4878.5
10°	4717.2
12.5°	4502.4
15°	4234.4
17.5°	3831.5
20°	3268.1
22.5°	2596.9
25°	1967.9
27.5°	1440.9
30°	1036.4
32.5°	704.9
35°	440.2
37.5°	261.0
40°	162.1
42.5°	106.6
45°	70.5
47.5°	45.4
50°	30.4
52.5°	20.3
55°	14.2
57.5°	9.3
60°	6.1
62.5°	3.2
65°	1.2
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)