

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784557

Luminaire Tested: LER4DD35BD010-EC4DR6020359040-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P784557
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD35BD010-EC4DR6020359040-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3389.9 lumens
Efficiency: N/A
Efficacy: 110.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784557

CATALOG NUMBER: LER4DD35BD010-EC4DR6020359040-4LBDP1H

Luminous Intensity Polar Plot

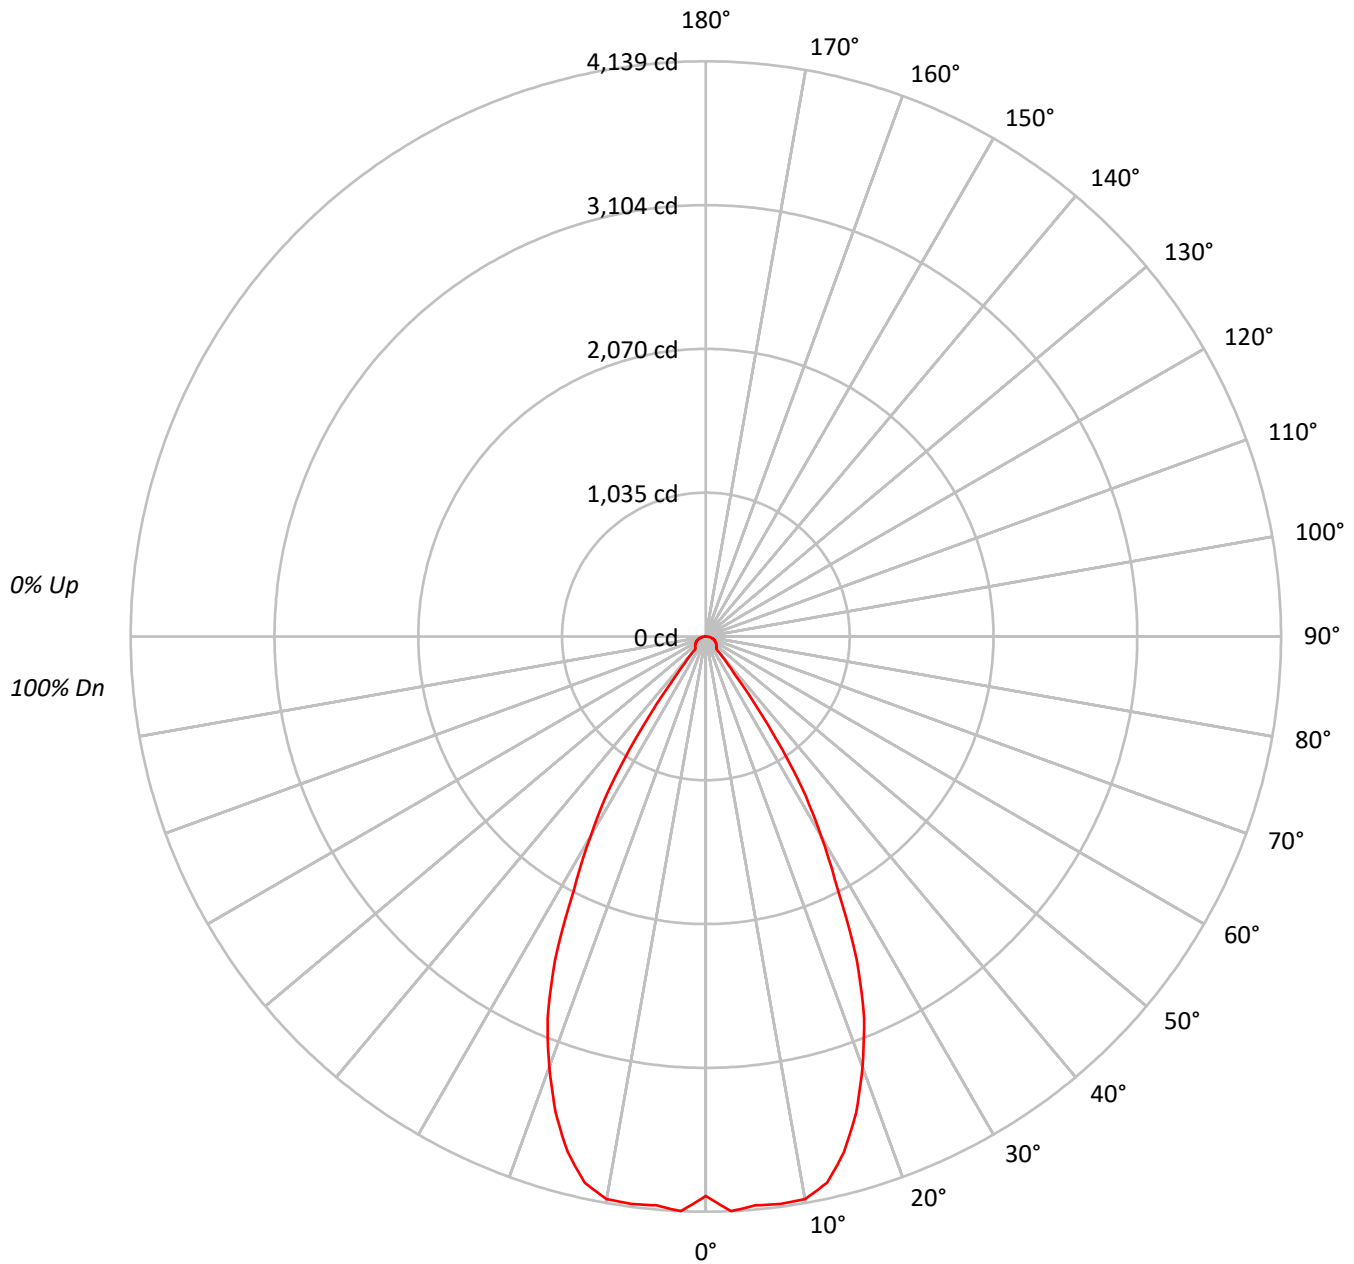



TEST NUMBER: P784557

CATALOG NUMBER: LER4DD35BD010-EC4DR6020359040-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	96	90	86	100	94	89	86	91	88	84		89	86	83		87
4	97	89	84	80	95	88	83	79	86	82	78		84	80	77		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	87	78	73	69	77	72	68		75	71	68		74
7	84	75	69	65	83	74	68	64	73	68	64		72	67	64		71
8	80	71	65	61	79	70	65	61	69	64	60		68	64	60		67
9	77	67	61	57	75	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	439873
5°	450689
10°	456133
15°	434531
20°	383119
25°	309877
30°	209608
35°	105039
40°	17044
45°	16672
50°	17015
55°	17258
60°	17744
65°	18149
70°	18592
75°	18786
80°	18121
85°	15169

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 18786 cd/sqm



TEST NUMBER: P784557

CATALOG NUMBER: LER4DD35BD010-EC4DR6020359040-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	392.7	11.6
10°-20°	1062.6	31.3
20°-30°	1143.2	33.7
30°-40°	497.0	14.7
40°-50°	83.5	2.5
50°-60°	81.2	2.4
60°-70°	69.4	2.0
70°-80°	46.4	1.4
80°-90°	13.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2598.5	76.7
0°-40°	3095.5	91.3
0°-60°	3260.1	96.2
0°-90°	3389.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3389.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4026	
5°	4109	393
15°	3842	1063
25°	2570	1143
35°	788	497
45°	108	83
55°	91	81
65°	70	69
75°	44	46
85°	12	14
90°	0	



TEST NUMBER: P784557

CATALOG NUMBER: LER4DD35BD010-EC4DR6020359040-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	4025.9
2.5°	4139.1
5°	4109.2
7.5°	4118.6
10°	4111.3
12.5°	4026.4
15°	3841.5
17.5°	3593.1
20°	3295.0
22.5°	2975.9
25°	2570.4
27.5°	2055.9
30°	1661.4
32.5°	1280.5
35°	787.5
37.5°	336.9
40°	119.5
42.5°	110.0
45°	107.9
47.5°	104.3
50°	100.1
52.5°	95.4
55°	90.6
57.5°	85.9
60°	81.2
62.5°	76.0
65°	70.2
67.5°	64.4
70°	58.2
72.5°	51.3
75°	44.5
77.5°	36.7
80°	28.8
82.5°	20.4
85°	12.1
87.5°	4.2
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)