

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784611

Luminaire Tested: LER4DD35BD010-EC4DR7020359050-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P784611
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD35BD010-EC4DR7020359050-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2684.2 lumens
Efficiency: N/A
Efficacy: 87.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784611

CATALOG NUMBER: LER4DD35BD010-EC4DR7020359050-4LBDP1MW

Luminous Intensity Polar Plot

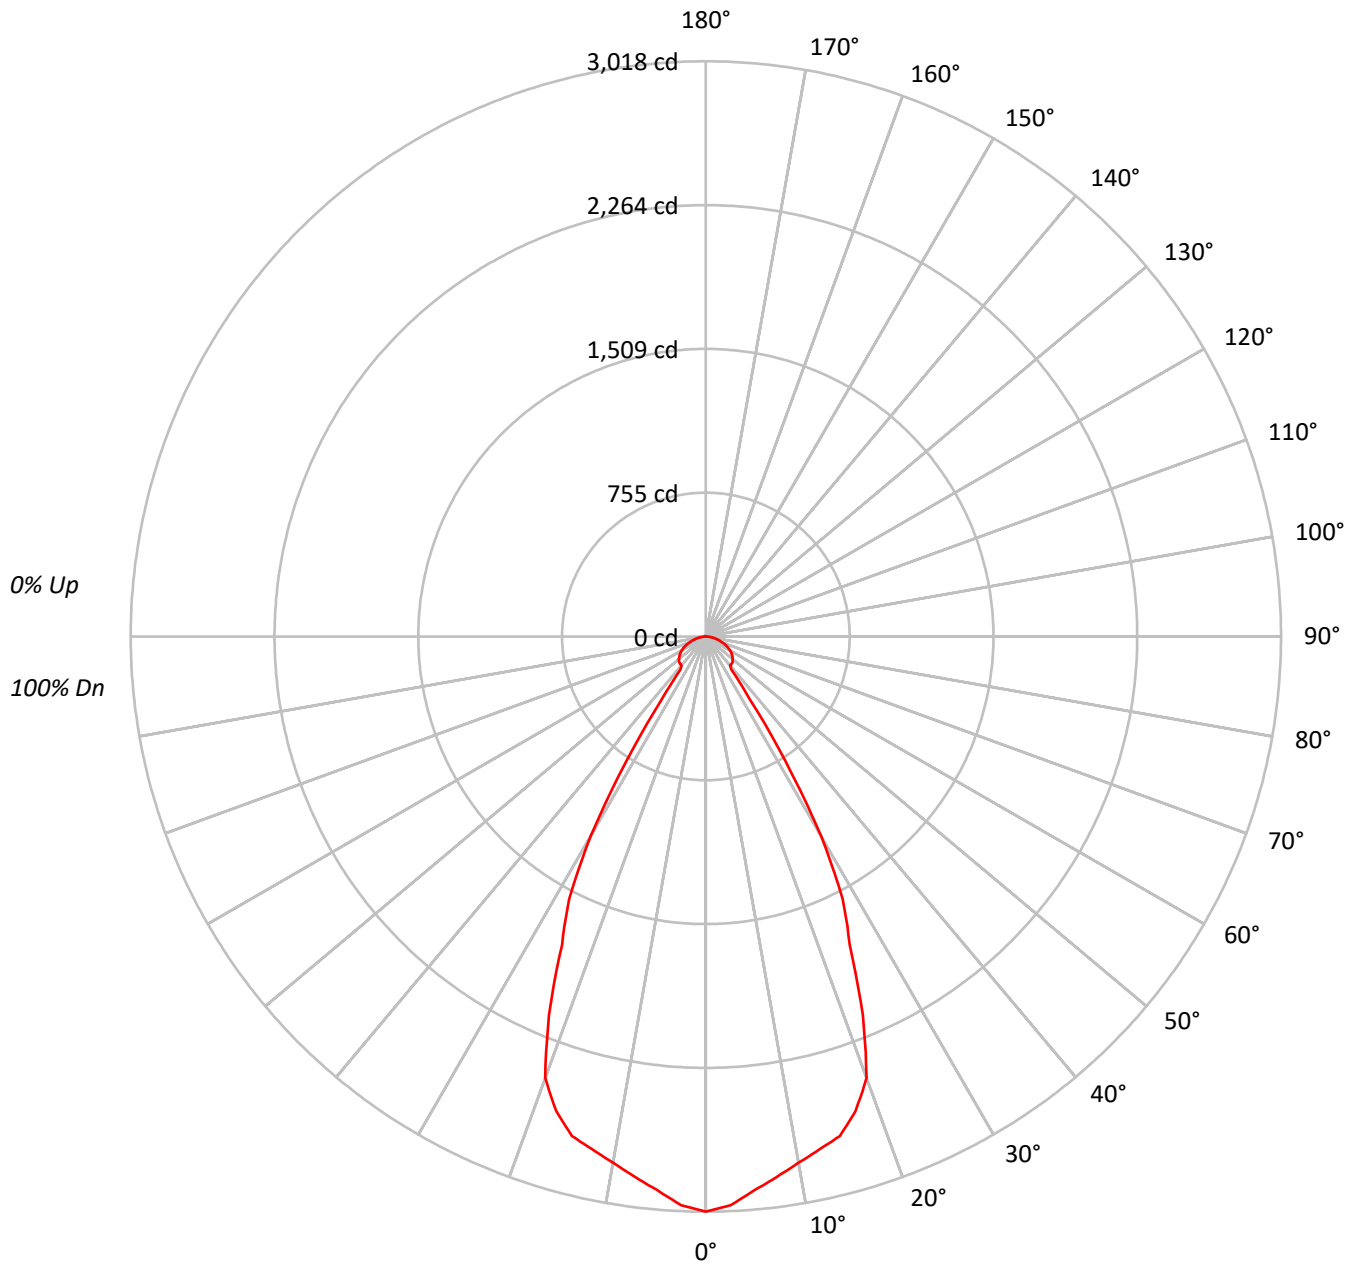



TEST NUMBER: P784611

CATALOG NUMBER: LER4DD35BD010-EC4DR7020359050-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	329727
5°	319931
10°	311016
15°	306938
20°	286613
25°	215313
30°	152216
35°	53913
40°	28355
45°	30193
50°	31276
55°	31850
60°	32057
65°	31386
70°	29614
75°	27440
80°	24350
85°	19807

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 57.5°

Luminance: 32069 cd/sqm



TEST NUMBER: P784611

CATALOG NUMBER: LER4DD35BD010-EC4DR7020359050-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	275.1	10.3
10°-20°	754.7	28.1
20°-30°	831.2	31.0
30°-40°	317.6	11.8
40°-50°	149.9	5.6
50°-60°	149.1	5.6
60°-70°	119.4	4.4
70°-80°	68.6	2.6
80°-90°	18.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1861.0	69.3
0°-40°	2178.6	81.2
0°-60°	2477.6	92.3
0°-90°	2684.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2684.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3018	
5°	2917	275
15°	2714	755
25°	1786	831
35°	404	318
45°	195	150
55°	167	149
65°	121	119
75°	65	69
85°	16	19
90°	0	



TEST NUMBER: P784611

CATALOG NUMBER: LER4DD35BD010-EC4DR7020359050-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3017.8
2.5°	2986.3
5°	2917.0
7.5°	2859.2
10°	2803.3
12.5°	2756.0
15°	2713.5
17.5°	2610.7
20°	2465.0
22.5°	2150.6
25°	1786.0
27.5°	1554.8
30°	1206.5
32.5°	779.3
35°	404.2
37.5°	218.4
40°	198.8
42.5°	197.3
45°	195.4
47.5°	191.1
50°	184.0
52.5°	175.8
55°	167.2
57.5°	157.7
60°	146.7
62.5°	134.3
65°	121.4
67.5°	107.0
70°	92.7
72.5°	78.4
75°	65.0
77.5°	51.1
80°	38.7
82.5°	27.2
85°	15.8
87.5°	6.2
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)