

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784651

Luminaire Tested: LER4DD40BD010-EC4DR3040509035-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784651
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD40BD010-EC4DR3040509035-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3311.6 lumens
Efficiency: N/A
Efficacy: 94.1 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784651

CATALOG NUMBER: LER4DD40BD010-EC4DR3040509035-4LBDP1MW

Luminous Intensity Polar Plot

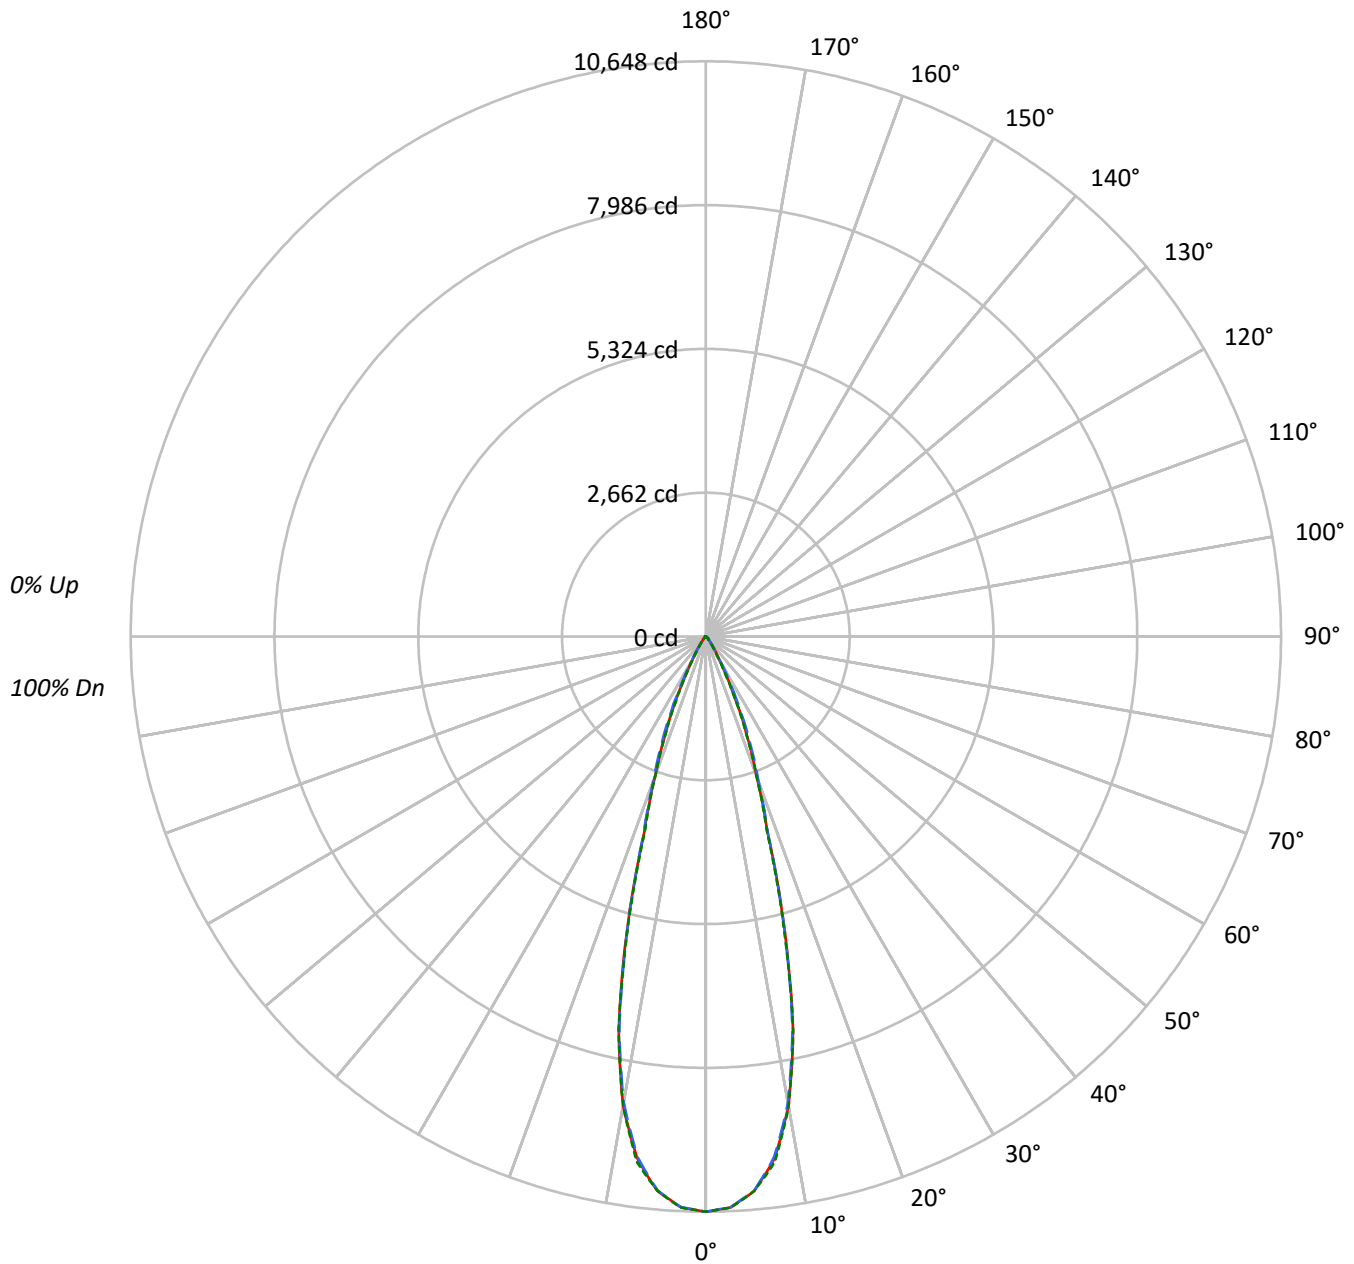



TEST NUMBER: P784651

CATALOG NUMBER: LER4DD40BD010-EC4DR3040509035-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94
4	103	98	93	90	102	96	93	90	94	91	89		93	90	88		91
5	100	94	89	86	98	93	89	86	91	88	85		90	86	84		88
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85
7	94	87	82	79	92	86	82	79	85	81	78		84	81	78		83
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	815072	815072	815072
5°	791670	790748	791708
10°	685706	680872	685543
15°	447393	444984	442750
20°	222464	230813	222171
25°	112065	126372	109768
30°	44864	48886	39093
35°	20810	19931	16707
40°	8983	9982	8463
45°	6343	7870	6397
50°	2179	5728	2298
55°	1254	2375	1321
60°	888	1041	888
65°	561	561	561
70°	358	224	358
75°	0	148	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 7870 cd/sqm



TEST NUMBER: P784651

CATALOG NUMBER: LER4DD40BD010-EC4DR3040509035-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	936.4	28.3
10°-20°	1508.0	45.5
20°-30°	651.7	19.7
30°-40°	148.5	4.5
40°-50°	51.0	1.5
50°-60°	12.4	0.4
60°-70°	3.2	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3096.1	93.5
0°-40°	3244.6	98.0
0°-60°	3308.0	99.9
0°-90°	3311.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3311.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	10648	10648	10648	10648	10648	
5°	10303	10294	10291	10313	10304	937
15°	5646	5578	5615	5597	5587	1512
25°	1327	1377	1496	1342	1300	635
35°	223	227	213	212	179	151
45°	59	73	73	73	59	42
55°	9	10	18	10	10	9
65°	3	3	3	3	3	3
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P784651

CATALOG NUMBER: LER4DD40BD010-EC4DR3040509035-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	10648.5	10648.5	10648.5	10648.5	10648.5
2.5°	10577.9	10570.6	10574.8	10580.0	10582.1
5°	10303.4	10293.5	10291.4	10312.8	10303.9
7.5°	9749.8	9735.7	9714.2	9762.8	9808.3
10°	8822.3	8806.6	8760.1	8783.1	8820.2
12.5°	7453.1	7402.4	7401.3	7474.5	7464.6
15°	5645.8	5577.8	5615.4	5597.1	5587.2
17.5°	3796.6	3770.5	3820.6	3805.5	3740.1
20°	2731.1	2737.9	2833.6	2785.5	2727.5
22.5°	1992.9	2017.5	2130.9	2007.0	1961.6
25°	1326.9	1377.1	1496.3	1342.0	1299.7
27.5°	816.1	839.1	959.9	805.6	782.6
30°	507.6	496.1	553.1	474.7	442.3
32.5°	333.0	318.4	336.7	302.2	276.0
35°	222.7	227.4	213.3	211.7	178.8
37.5°	139.1	160.0	141.2	150.6	115.0
40°	89.9	116.1	99.9	110.3	84.7
42.5°	73.7	89.4	82.1	87.3	75.3
45°	58.6	72.7	72.7	72.7	59.1
47.5°	32.4	48.6	62.2	49.7	34.5
50°	18.3	24.6	48.1	25.6	19.3
52.5°	12.5	14.1	32.9	14.6	13.1
55°	9.4	9.9	17.8	10.5	9.9
57.5°	7.3	7.8	9.4	7.8	7.3
60°	5.8	5.8	6.8	6.3	5.8
62.5°	4.2	4.2	4.7	4.2	4.2
65°	3.1	3.1	3.1	3.1	3.1
67.5°	1.6	2.1	2.1	2.1	2.1
70°	1.6	1.0	1.0	1.0	1.6
72.5°	1.0	0.5	0.5	0.5	0.5
75°	0.0	0.0	0.5	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°







(END OF REPORT)