

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784688

Luminaire Tested: LER4DD40BD010-EC4DR4040509027-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784688
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD40BD010-EC4DR4040509027-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3397.3 lumens
Efficiency: N/A
Efficacy: 96.5 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784688

CATALOG NUMBER: LER4DD40BD010-EC4DR4040509027-4LBDP1B

Luminous Intensity Polar Plot

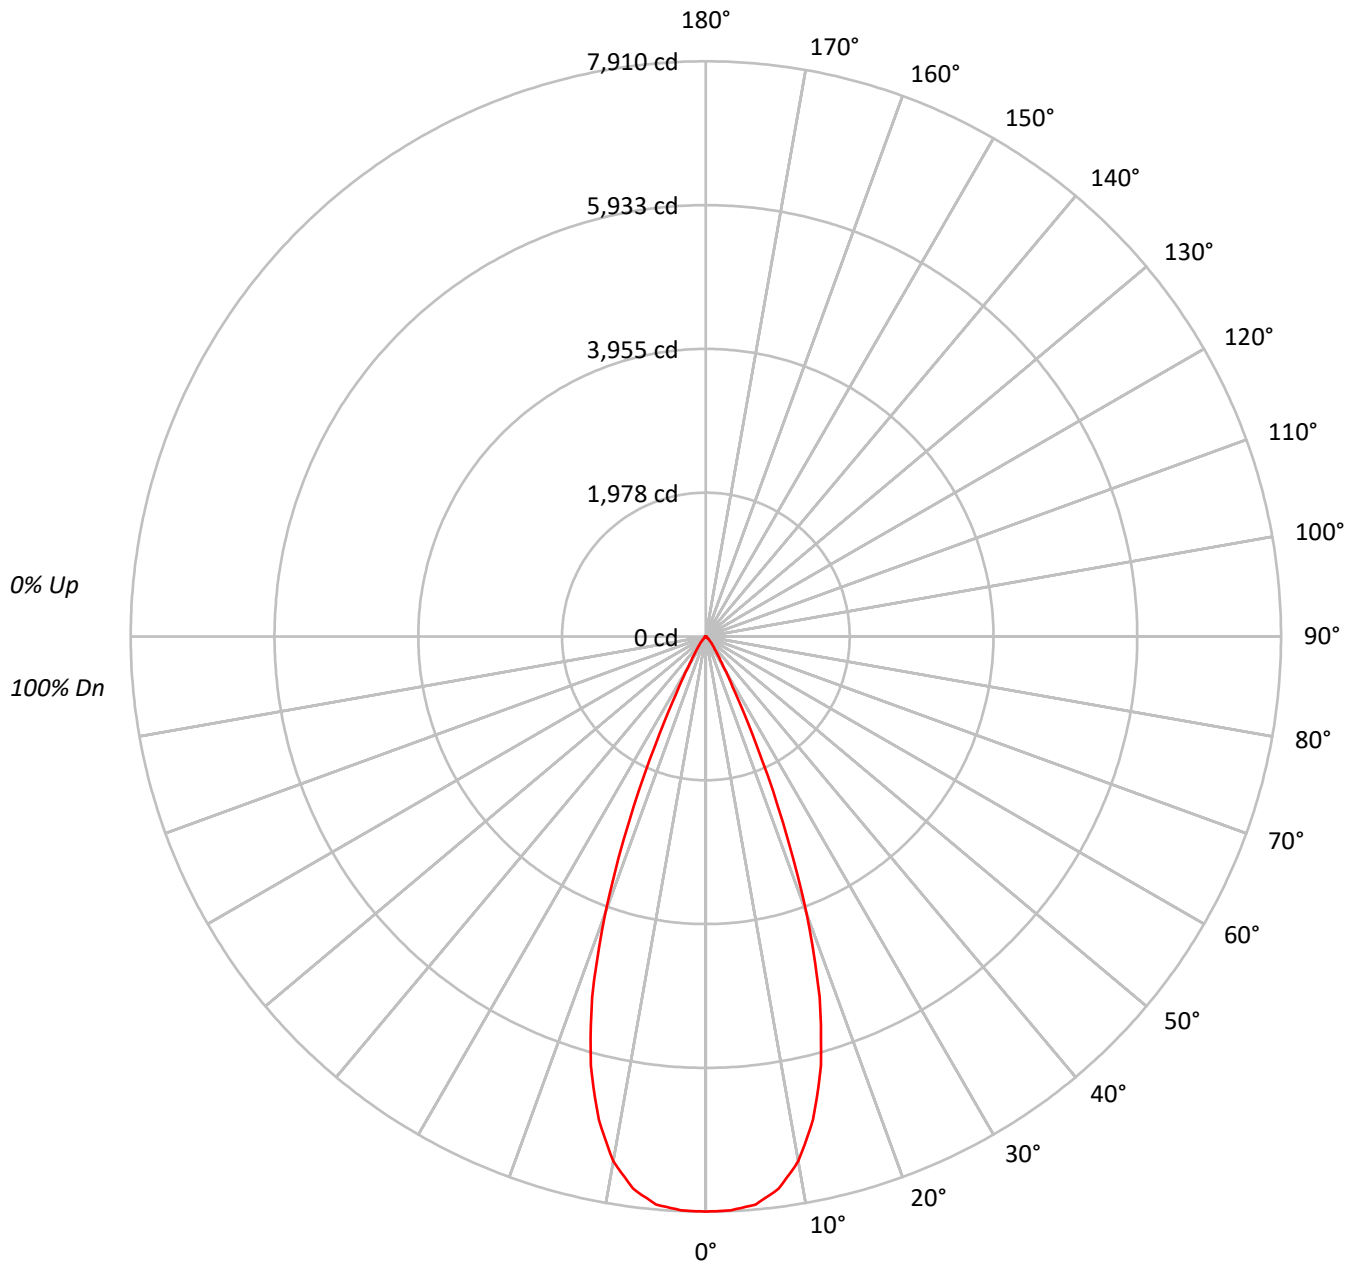



TEST NUMBER: P784688

CATALOG NUMBER: LER4DD40BD010-EC4DR4040509027-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20							
RC	80				70				50				30				10				0			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																								
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96						
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92						
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88						
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84						
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81						
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77						
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74						
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72						
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69						
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67						

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	864231
5°	860030
10°	812914
15°	691076
20°	471021
25°	196530
30°	61795
35°	28717
40°	15889
45°	7278
50°	3536
55°	1943
60°	1005
65°	362
70°	160
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7278 cd/sqm

TEST NUMBER: P784688

CATALOG NUMBER: LER4DD40BD010-EC4DR4040509027-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	732.2	21.6
10°-20°	1640.3	48.3
20°-30°	821.1	24.2
30°-40°	150.5	4.4
40°-50°	41.5	1.2
50°-60°	9.8	0.3
60°-70°	1.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3193.6	94.0
0°-40°	3344.1	98.4
0°-60°	3395.4	99.9
0°-90°	3397.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3397.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7910	
5°	7841	732
15°	6110	1640
25°	1630	821
35°	215	151
45°	47	42
55°	10	10
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784688

CATALOG NUMBER: LER4DD40BD010-EC4DR4040509027-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	7909.8
2.5°	7898.2
5°	7841.4
7.5°	7660.2
10°	7327.1
12.5°	6807.7
15°	6109.5
17.5°	5201.5
20°	4051.0
22.5°	2761.8
25°	1630.2
27.5°	861.8
30°	489.8
32.5°	316.5
35°	215.3
37.5°	153.9
40°	111.4
42.5°	76.2
45°	47.1
47.5°	30.0
50°	20.8
52.5°	14.8
55°	10.2
57.5°	6.5
60°	4.6
62.5°	2.8
65°	1.4
67.5°	0.9
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)