

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784729

Luminaire Tested: LER4DD40BD010-EC4DR4540509050-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784729
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD40BD010-EC4DR4540509050-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4104.8 lumens
Efficiency: N/A
Efficacy: 116.6 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784729

CATALOG NUMBER: LER4DD40BD010-EC4DR4540509050-4LBDP1H

Luminous Intensity Polar Plot

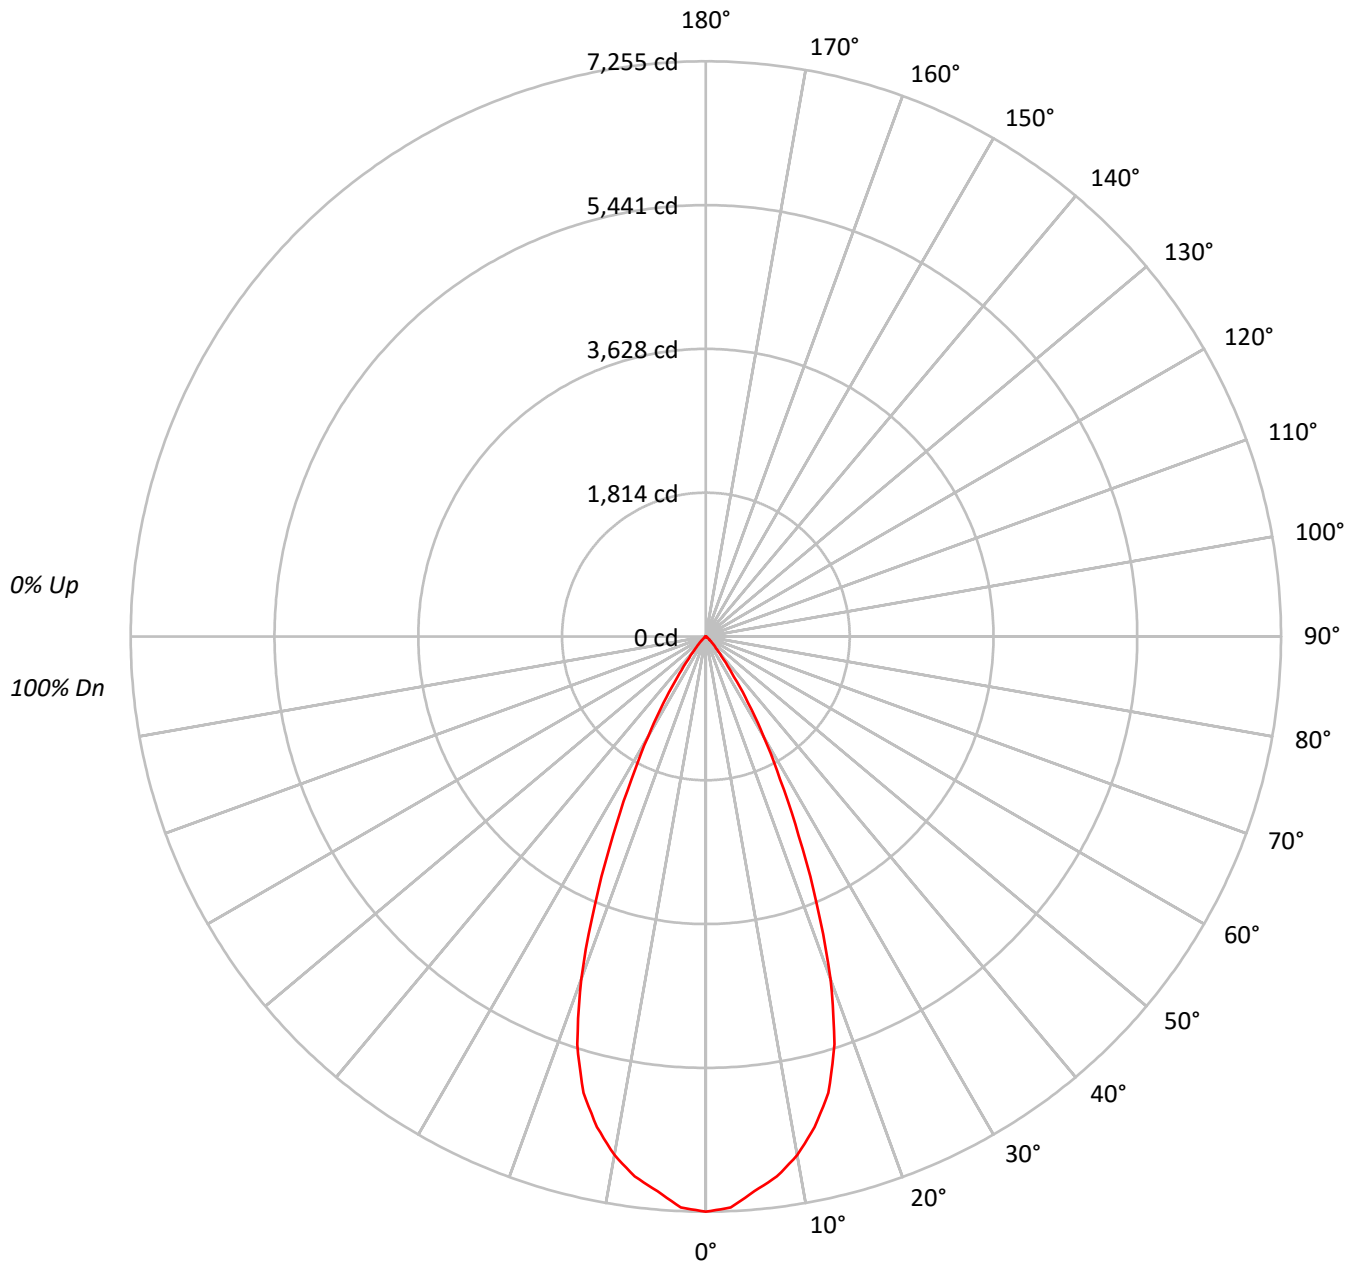



TEST NUMBER: P784729

CATALOG NUMBER: LER4DD40BD010-EC4DR4540509050-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95		
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77		
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73		
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69		
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66		
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63		
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	792709
5°	770138
10°	736816
15°	674335
20°	534983
25°	334000
30°	184085
35°	82657
40°	32562
45°	15344
50°	7275
55°	3810
60°	1879
65°	440
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15344 cd/sqm



TEST NUMBER: P784729

CATALOG NUMBER: LER4DD40BD010-EC4DR4540509050-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	659.8	16.1
10°-20°	1623.8	39.6
20°-30°	1285.9	31.3
30°-40°	428.2	10.4
40°-50°	85.0	2.1
50°-60°	19.3	0.5
60°-70°	2.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3569.4	87.0
0°-40°	3997.6	97.4
0°-60°	4101.9	99.9
0°-90°	4104.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4104.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7255	
5°	7022	660
15°	5962	1624
25°	2770	1286
35°	620	428
45°	99	85
55°	20	19
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784729

CATALOG NUMBER: LER4DD40BD010-EC4DR4540509050-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	7255.2
2.5°	7207.8
5°	7021.8
7.5°	6868.3
10°	6641.2
12.5°	6338.7
15°	5961.5
17.5°	5394.3
20°	4601.1
22.5°	3656.1
25°	2770.5
27.5°	2028.7
30°	1459.1
32.5°	992.4
35°	619.7
37.5°	367.5
40°	228.3
42.5°	150.1
45°	99.3
47.5°	63.9
50°	42.8
52.5°	28.5
55°	20.0
57.5°	13.1
60°	8.6
62.5°	4.6
65°	1.7
67.5°	0.6
70°	0.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)