

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P784959

Luminaire Tested: LER4DD45BD010-EC4DR4540509030-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P784959
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD45BD010-EC4DR4540509030-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3994.0 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P784959

CATALOG NUMBER: LER4DD45BD010-EC4DR4540509030-4LBDP1MW

Luminous Intensity Polar Plot

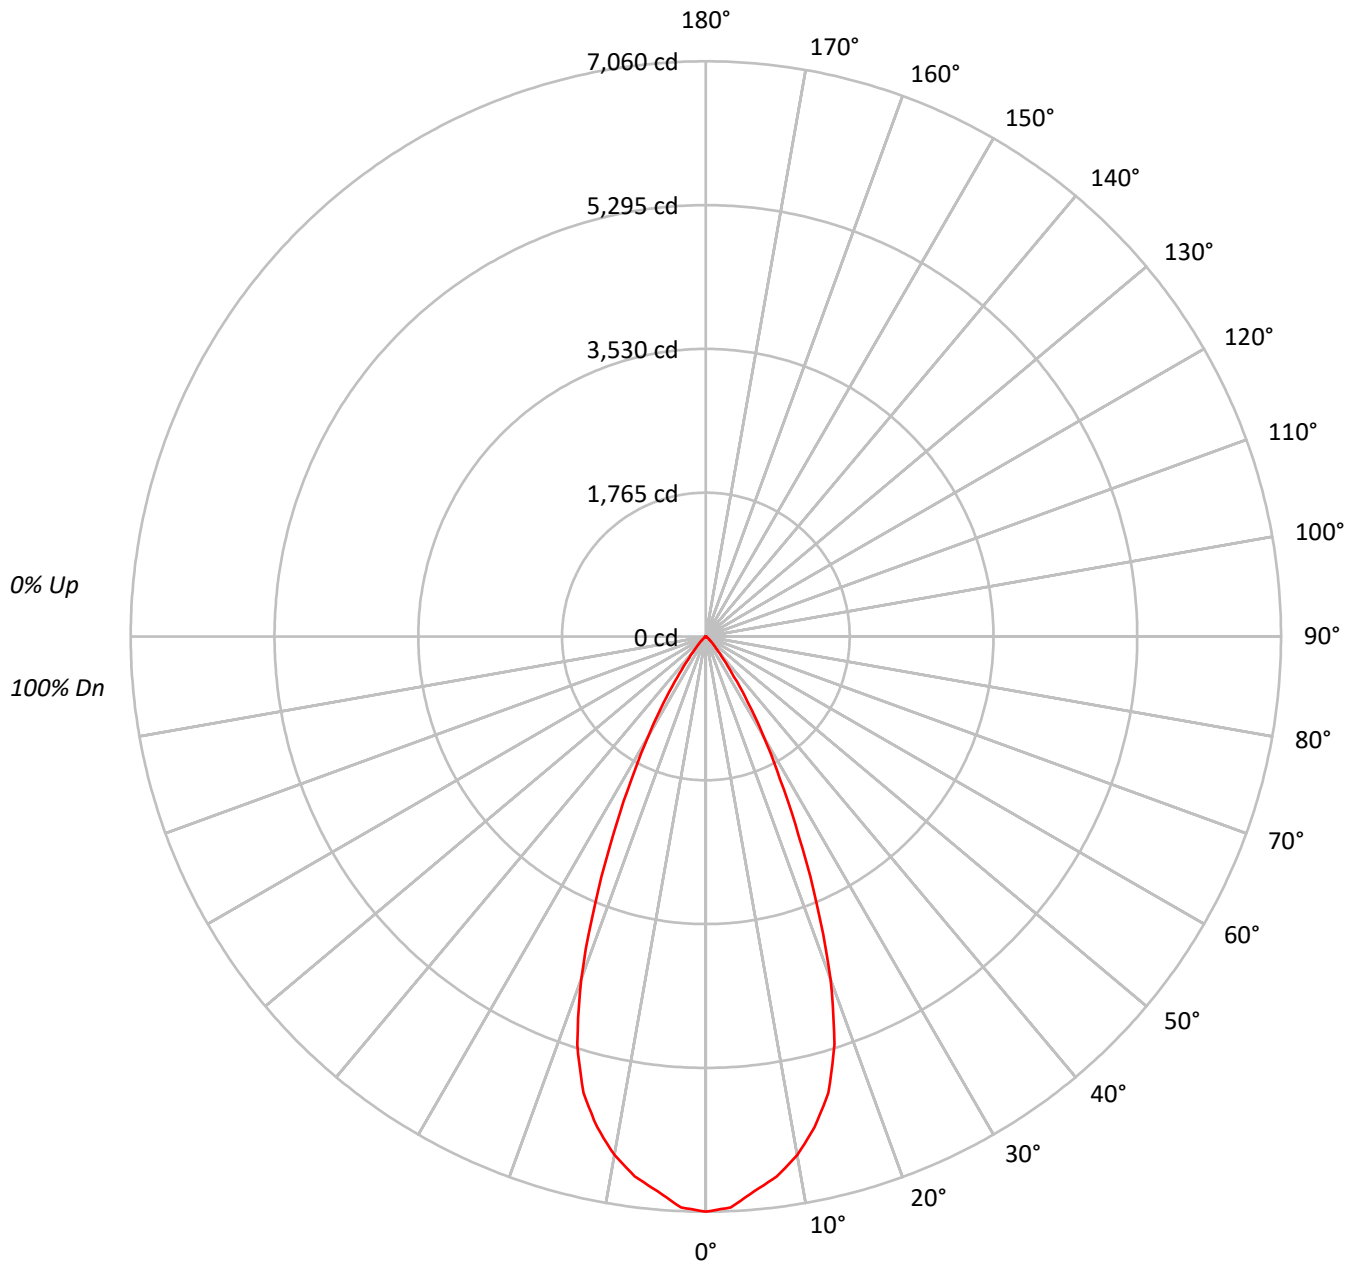

TEST NUMBER: P784959

CATALOG NUMBER: LER4DD45BD010-EC4DR4540509030-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		98
2	109	105	102	99	107	103	100	98	100	98	95		97	95	93		95
3	105	99	95	91	103	98	94	91	95	92	89		93	90	88		91
4	100	94	89	85	99	93	88	85	91	87	84		89	86	83		87
5	96	89	84	80	95	88	83	80	86	82	79		85	81	79		83
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80
7	89	81	75	72	87	80	75	72	79	74	71		78	74	71		77
8	85	77	72	68	84	76	71	68	75	71	68		74	70	67		73
9	82	73	68	65	81	73	68	65	72	68	65		71	67	64		71
10	79	70	65	62	78	70	65	62	69	65	62		68	64	61		68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	771326
5°	749365
10°	716946
15°	656158
20°	520554
25°	324995
30°	179127
35°	80430
40°	31678
45°	14926
50°	7071
55°	3696
60°	1814
65°	440
70°	192
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14926 cd/sqm



TEST NUMBER: P784959

CATALOG NUMBER: LER4DD45BD010-EC4DR4540509030-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	642.0	16.1
10°-20°	1580.0	39.6
20°-30°	1251.2	31.3
30°-40°	416.7	10.4
40°-50°	82.7	2.1
50°-60°	18.8	0.5
60°-70°	2.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3473.1	87.0
0°-40°	3889.8	97.4
0°-60°	3991.2	99.9
0°-90°	3994.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3994.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7060	
5°	6832	642
15°	5801	1580
25°	2696	1251
35°	603	417
45°	97	83
55°	19	19
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P784959

CATALOG NUMBER: LER4DD45BD010-EC4DR4540509030-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	7059.5
2.5°	7013.4
5°	6832.4
7.5°	6683.1
10°	6462.1
12.5°	6167.8
15°	5800.8
17.5°	5248.8
20°	4477.0
22.5°	3557.5
25°	2695.8
27.5°	1973.9
30°	1419.8
32.5°	965.6
35°	603.0
37.5°	357.6
40°	222.1
42.5°	146.0
45°	96.6
47.5°	62.2
50°	41.6
52.5°	27.8
55°	19.4
57.5°	12.8
60°	8.3
62.5°	4.4
65°	1.7
67.5°	0.6
70°	0.6
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9





— 0°-180°







(END OF REPORT)