

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785039

Luminaire Tested: LER4DD45BD010-EC4DR6040509040-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P785039
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LER4DD45BD010-EC4DR6040509040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3958.7 lumens
Efficiency: N/A
Efficacy: 102.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P785039

CATALOG NUMBER: LER4DD45BD010-EC4DR6040509040-4LBDP1MW

Luminous Intensity Polar Plot

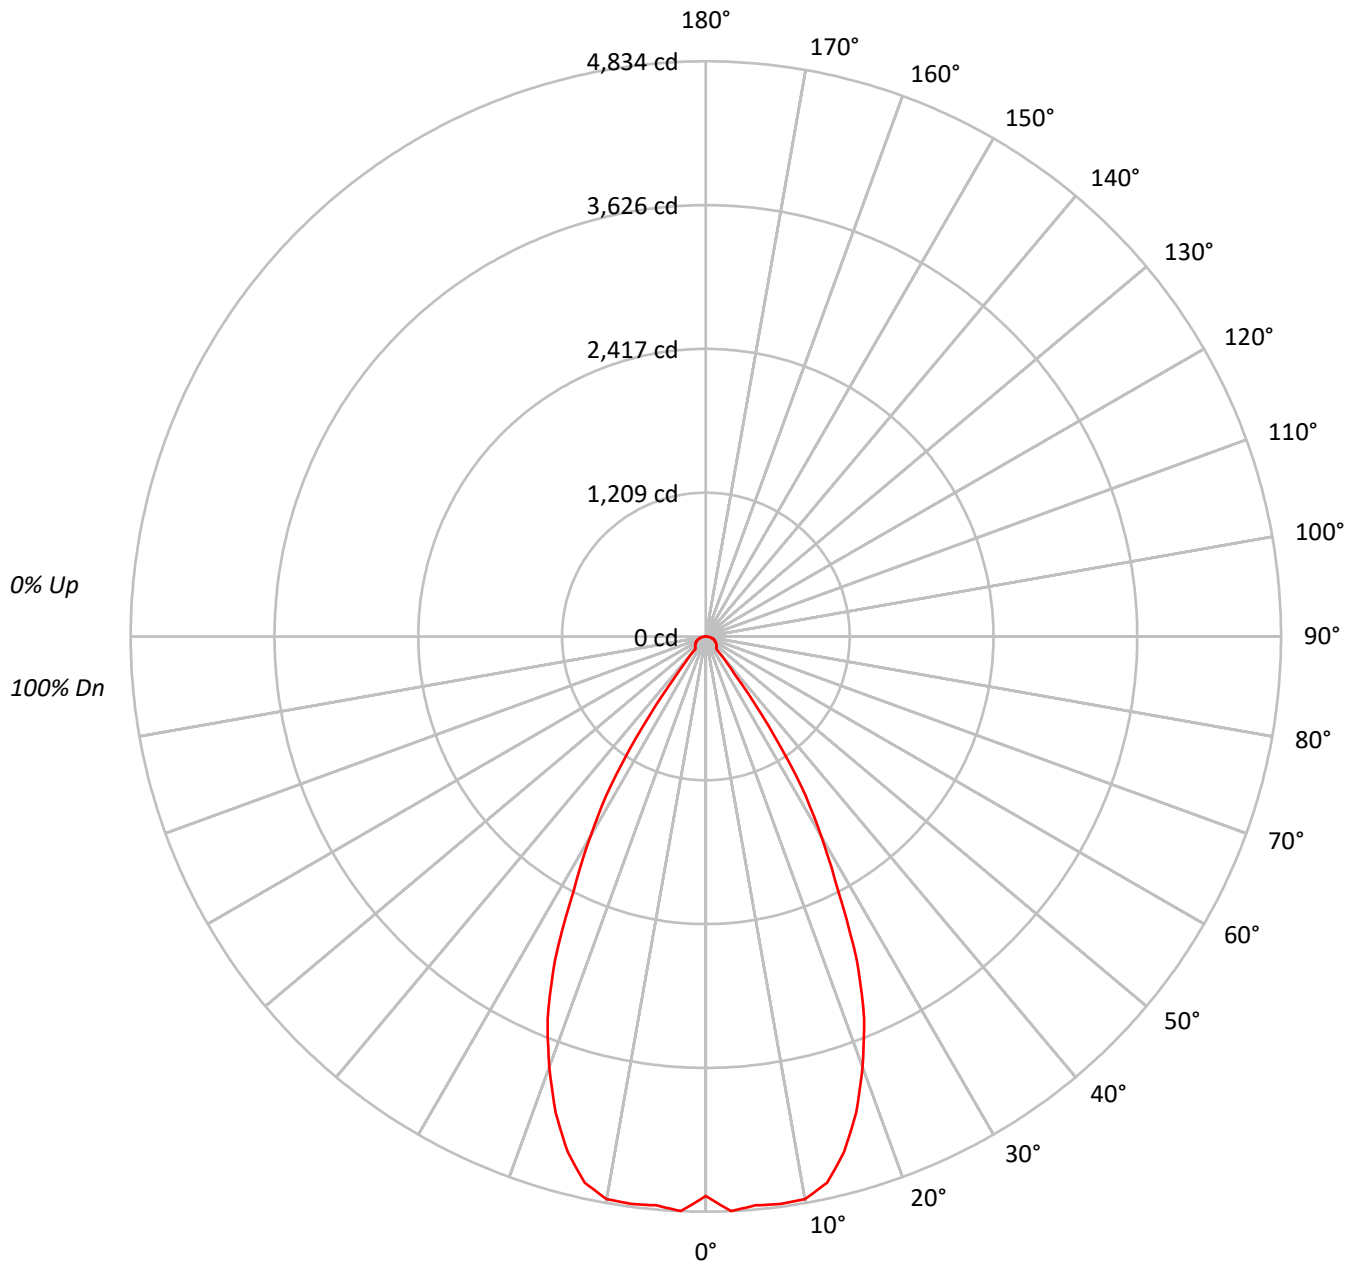



TEST NUMBER: P785039

CATALOG NUMBER: LER4DD45BD010-EC4DR6040509040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	513679
5°	526312
10°	532664
15°	507434
20°	447406
25°	361873
30°	244770
35°	122659
40°	19897
45°	19469
50°	19871
55°	20154
60°	20716
65°	21200
70°	21691
75°	21952
80°	21204
85°	17676

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 21952 cd/sqm



TEST NUMBER: P785039

CATALOG NUMBER: LER4DD45BD010-EC4DR6040509040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	458.6	11.6
10°-20°	1240.9	31.3
20°-30°	1335.1	33.7
30°-40°	580.3	14.7
40°-50°	97.5	2.5
50°-60°	94.8	2.4
60°-70°	81.1	2.0
70°-80°	54.2	1.4
80°-90°	16.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3034.6	76.7
0°-40°	3614.9	91.3
0°-60°	3807.1	96.2
0°-90°	3958.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3958.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4701	
5°	4799	459
15°	4486	1241
25°	3002	1335
35°	920	580
45°	126	97
55°	106	95
65°	82	81
75°	52	54
85°	14	16
90°	0	



TEST NUMBER: P785039

CATALOG NUMBER: LER4DD45BD010-EC4DR6040509040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4701.4
2.5°	4833.5
5°	4798.7
7.5°	4809.7
10°	4801.1
12.5°	4702.0
15°	4486.0
17.5°	4196.0
20°	3847.9
22.5°	3475.3
25°	3001.7
27.5°	2400.9
30°	1940.1
32.5°	1495.3
35°	919.6
37.5°	393.4
40°	139.5
42.5°	128.5
45°	126.0
47.5°	121.8
50°	116.9
52.5°	111.4
55°	105.8
57.5°	100.3
60°	94.8
62.5°	88.7
65°	82.0
67.5°	75.3
70°	67.9
72.5°	60.0
75°	52.0
77.5°	42.8
80°	33.7
82.5°	23.9
85°	14.1
87.5°	4.9
90°	0.0



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°







(END OF REPORT)