

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P785184

Luminaire Tested: LER4DD50D010-EC4DR4040509050-4LBDP1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P785184  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LER4DD50D010-EC4DR4040509050-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4796.6 lumens  
Efficiency: N/A  
Efficacy: 102.1 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 47  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P785184

CATALOG NUMBER: LER4DD50D010-EC4DR4040509050-4LBDP1B

### Luminous Intensity Polar Plot

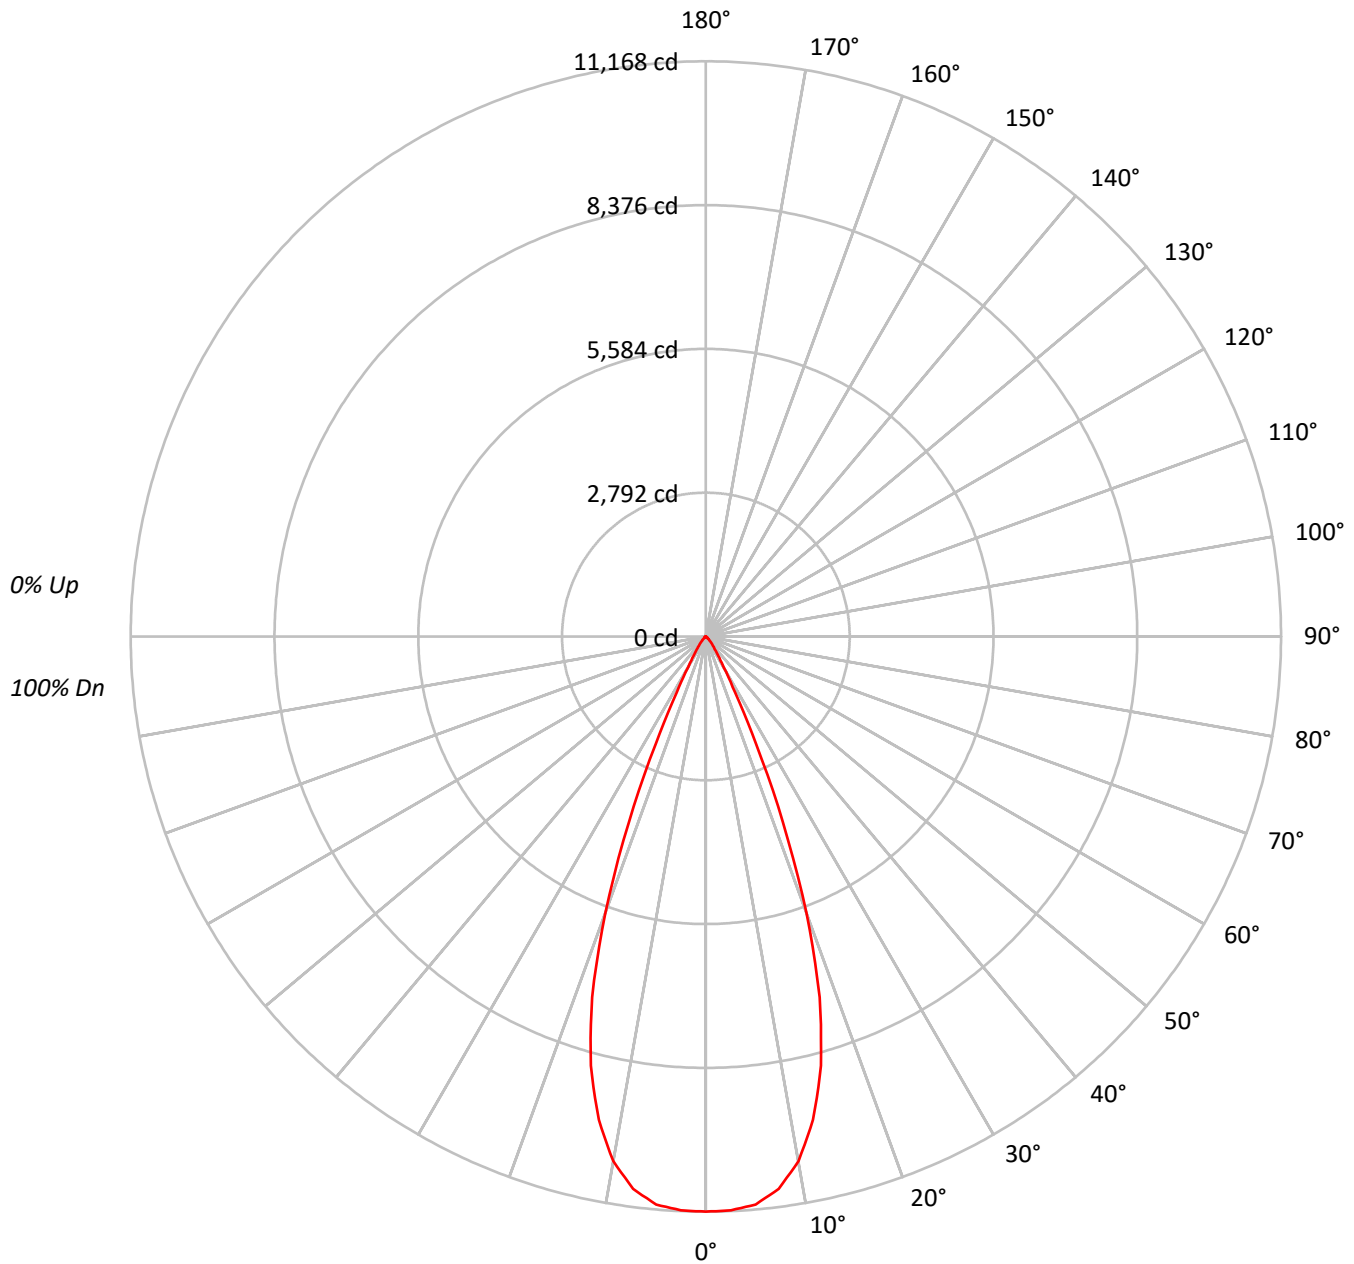

TEST NUMBER: P785184

CATALOG NUMBER: LER4DD50D010-EC4DR4040509050-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 |  | 103 | 101 | 100 |  | 99  |
| 2   | 110 | 106 | 103 | 100 | 108 | 105 | 102 | 99  | 102 | 99  | 97  |  | 99  | 97  | 95  |  | 96  |
| 3   | 106 | 101 | 97  | 94  | 104 | 100 | 96  | 93  | 97  | 94  | 92  |  | 95  | 93  | 90  |  | 93  |
| 4   | 102 | 97  | 92  | 89  | 101 | 95  | 91  | 88  | 93  | 90  | 87  |  | 92  | 89  | 86  |  | 90  |
| 5   | 99  | 92  | 88  | 84  | 97  | 91  | 87  | 84  | 90  | 86  | 83  |  | 88  | 85  | 83  |  | 87  |
| 6   | 95  | 88  | 84  | 80  | 94  | 88  | 83  | 80  | 86  | 82  | 80  |  | 85  | 82  | 79  |  | 84  |
| 7   | 92  | 85  | 80  | 77  | 91  | 84  | 80  | 77  | 83  | 79  | 76  |  | 82  | 79  | 76  |  | 81  |
| 8   | 89  | 82  | 77  | 74  | 88  | 81  | 77  | 74  | 80  | 76  | 73  |  | 79  | 76  | 73  |  | 78  |
| 9   | 86  | 79  | 74  | 71  | 85  | 78  | 74  | 71  | 77  | 73  | 71  |  | 76  | 73  | 70  |  | 76  |
| 10  | 83  | 76  | 71  | 68  | 82  | 75  | 71  | 68  | 75  | 71  | 68  |  | 74  | 70  | 68  |  | 73  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1220191 |
| 5°  | 1214268 |
| 10° | 1147750 |
| 15° | 975730  |
| 20° | 665034  |
| 25° | 277484  |
| 30° | 87242   |
| 35° | 40548   |
| 40° | 22421   |
| 45° | 10275   |
| 50° | 4997    |
| 55° | 2743    |
| 60° | 1420    |
| 65° | 517     |
| 70° | 224     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10275 cd/sqm

TEST NUMBER: P785184

CATALOG NUMBER: LER4DD50D010-EC4DR4040509050-4LBDP1B

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1033.8 | 21.6      |
| 10°-20°   | 2315.9 | 48.3      |
| 20°-30°   | 1159.3 | 24.2      |
| 30°-40°   | 212.5  | 4.4       |
| 40°-50°   | 58.6   | 1.2       |
| 50°-60°   | 13.8   | 0.3       |
| 60°-70°   | 2.6    | 0.1       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 4509.0 | 94.0      |
| 0°-40°    | 4721.5 | 98.4      |
| 0°-60°    | 4793.9 | 99.9      |
| 0°-90°    | 4796.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 4796.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 11168 |      |
| 5°  | 11071 | ###  |
| 15° | 8626  | 2316 |
| 25° | 2302  | 1159 |
| 35° | 304   | 212  |
| 45° | 66    | 59   |
| 55° | 14    | 14   |
| 65° | 2     | 3    |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P785184

CATALOG NUMBER: LER4DD50D010-EC4DR4040509050-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

|       | 0°      |
|-------|---------|
| 0°    | 11167.7 |
| 2.5°  | 11151.4 |
| 5°    | 11071.2 |
| 7.5°  | 10815.5 |
| 10°   | 10345.1 |
| 12.5° | 9611.8  |
| 15°   | 8626.0  |
| 17.5° | 7344.0  |
| 20°   | 5719.6  |
| 22.5° | 3899.4  |
| 25°   | 2301.7  |
| 27.5° | 1216.7  |
| 30°   | 691.5   |
| 32.5° | 446.9   |
| 35°   | 304.0   |
| 37.5° | 217.2   |
| 40°   | 157.2   |
| 42.5° | 107.6   |
| 45°   | 66.5    |
| 47.5° | 42.4    |
| 50°   | 29.4    |
| 52.5° | 20.9    |
| 55°   | 14.4    |
| 57.5° | 9.1     |
| 60°   | 6.5     |
| 62.5° | 3.9     |
| 65°   | 2.0     |
| 67.5° | 1.3     |
| 70°   | 0.7     |
| 72.5° | 0.0     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 0.0     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |



Report Generated By 670245859 / DESKTOP-T8S5UU9







— 0°-180°







(END OF REPORT)